

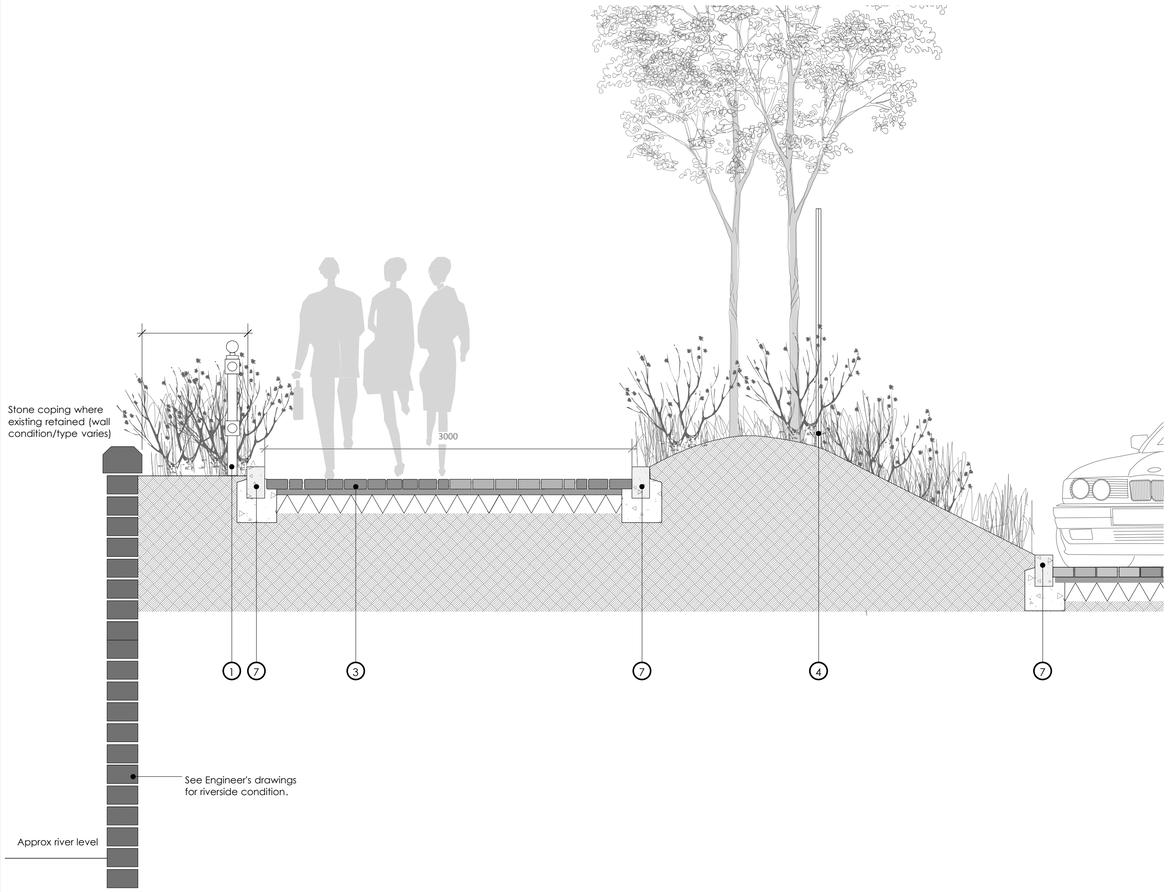


SECTION A THROUGH RIVERSIDE WALKWAY

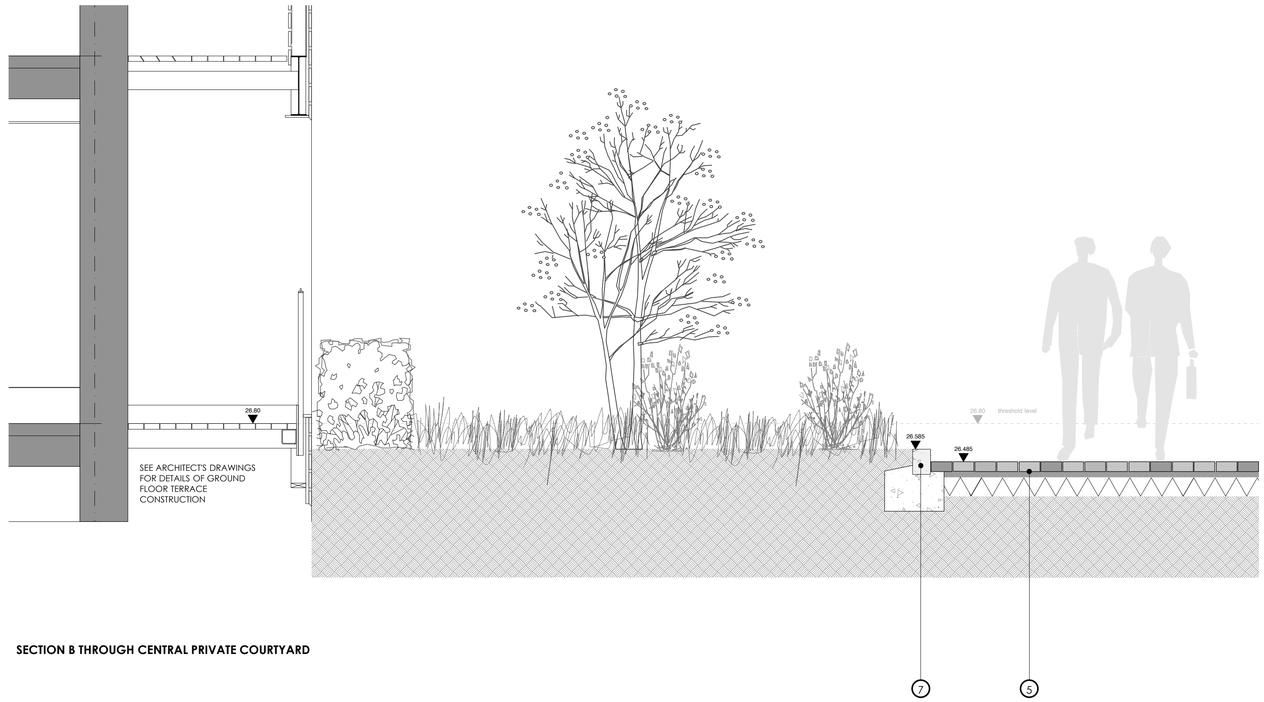

SECTION B THROUGH CENTRAL PRIVATE COURTYARD

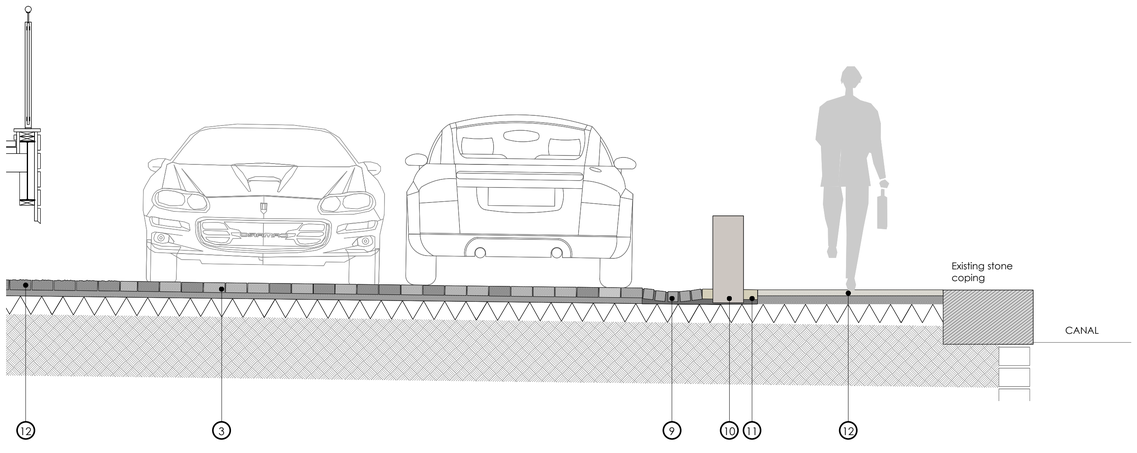

1:20 SECTION A THROUGH CANALSIDE

1. Cast iron balustarde to river edge to match existing. 1100 mm high with vertical bar infill. Set in concrete footings to Engineer's details.
2. 145 x 225mm textured concrete kerb with 100 mm upstand Marshalls Conservation Kerb
3. Tobermore Tegula paving 208 x 173mm & 173 x 173mm x 80 mm in Charcoal laid in stretcher courses parallel to direction of path.
4. Steel vertical bar fencing to match existing around Phase 1 car-park. Black polyester powder coated finish.
5. Tobermore Tegula paving 208 x 173mm & 173 x 173mm x 80 mm in Heather/Cedar/Bracken - see plans for colour, laid in stretcher courses.
7. 255 x 205mm textured concrete kerb with 100 mm upstand Marshalls Conservation Kerb
9. 100 x 100mm cropped granite setts drainage channel
10. 600mm height (above ground)timber bollard - nominal 250mm section Green Oak, grade D40. Total length 1050mm tied into reinforced slab. By Woodscape or similar approved.
11. Precast concrete coping, 825 x 450 x 70mm depth with recesses for bollards to match that on Phase 1
12. Concrete slab paving 600 x 400mm, Tobermore Mayfair in Sandtone or similar.

Notes

(1) Do not scale from drawings - use dimensions only. (2) All dimensions are in millimeters unless noted. (3) All dimensions shall be verified on site before proceeding with the work. (4) Landscape Projects shall be notified of any discrepancies.

(5) Engineer to specify all sub-bases. Any below ground construction is indicative.

(6) to be read in conjunction with setting out drawings LP294.070, 071 and 073 - Landscape Projects shall be notified of any discrepancies.

P1	RCD	2016-12-13	Issued for Planning
T1	RCD	2016-05-31	First Issue

landscapeprojects

Landscape Architecture & Design

31 Blackfriars Road Salford Manchester M3 7AQ
PHONE: 0161 839 8336 FAX: 0161 839 7155
EMAIL: post@landscapeprojects.co.uk

PROJECT: **Potato Wharf** Castlefield, Manchester

TITLE: **Phase 2: Blocks 3 & 4** Sections

DATE	DRAWN	CHECKED
2016-05-24	RCD	NCS

SCALE	STATUS	DRAWING NO	REVISION
1:25 @ A1	PLANNING	PW34-LP-90-G-DWG-L00-0100	P1