STEPS FROM SPORTS HALL

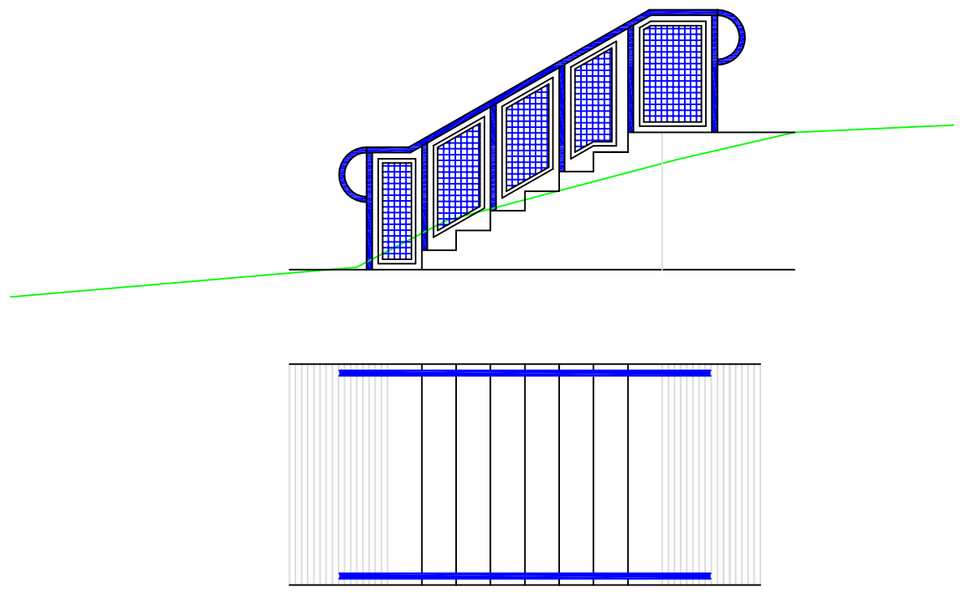

Steps to comrpise of:-

- 7no risers
- 280mm going and 160mm rise
- Corduroy paving to top and bottom (800mm deep)
- Handrails to be positioned 500mm away from edge with 45mm diameter handrail (warm touch)
- Handrails to passs 450mm beyond top and bottom steps with positive ends

STEPS FROM SCHOOL

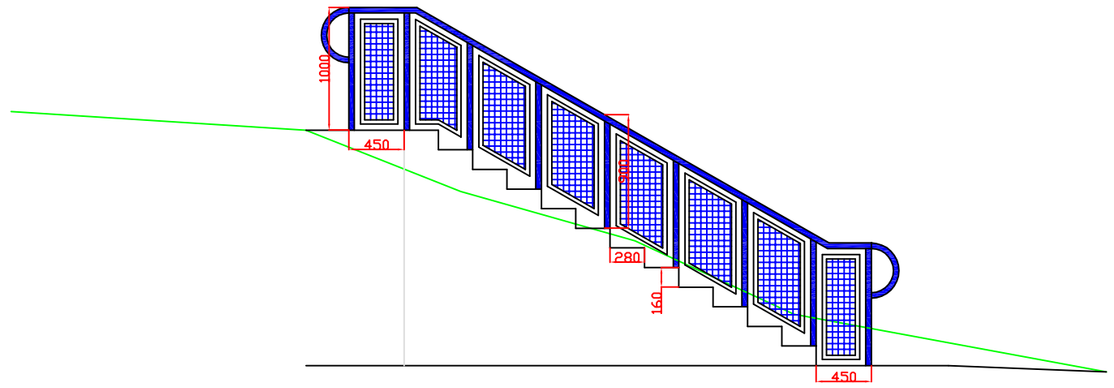

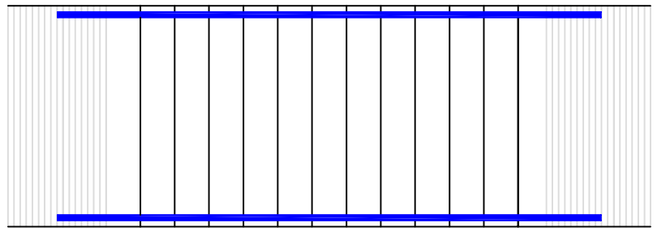

Steps to comrpise of:-

- 12no risers
- 280mm going and 160mm rise
- Corduroy paving to top and bottom (800mm deep)
- Handrails to be positioned 500mm away from edge with 45mm diameter handrail (warm touch)
- Handrails to passs 450mm beyond top and bottom steps with positive ends

Legend:

Rev	Description	By	Date

Capital Programme Division
Corporate Technical Services
4th floor , Heron House
47 Lloyd St, Manchester
M2 5LE
Tel: 0161 219 6500
FAX: 0161 219 6501

JOB TITLE		DRAWING TITLE	
Burnage Media College Sports Field Access		Proposed Steps	
JOB NO.		DRAWING NO.	
ED39558		02	
DATE	SCALE	DRAWN	REVISION
15/09/11	1:50	CLH	

MANCHESTER CITY COUNCIL