



Condition 2 – Roofing Material - Marley Edgemere Tile – Anthracite Colour

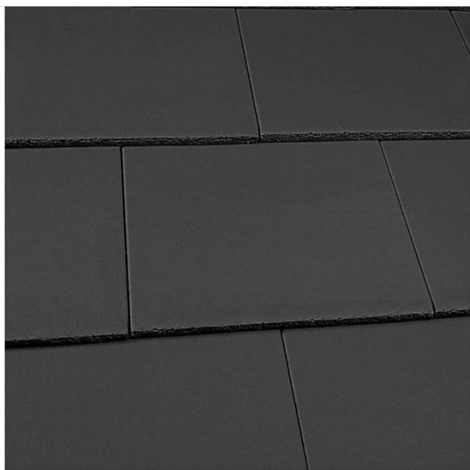

Edgemere – Concrete Interlocking Tile

Tile Design	Edgemere Concrete Interlocking Tile
Minimum Pitch	17.5° Headlap (100mm) 22.5° Headlap (75mm)
Maximum Pitch	90°
Size of Tile	420mm x 330mm
Minimum Headlap (Max Gauge)	75mm (345mm) 100mm (320mm)
Tile Thickness	18mm (nominal)
Cover width	298mm (nominal)
Covering Capacity (net)	75mm Headlap – 9.7 tiles/m ² 100mm Headlap – 10.5 tiles/m ²
Weight of Tiling	75mm Gauge – 44kg/m ² (0.43 kN/m ²) 100mm gauge – 47.5kg/m ² (0.47 kN/m ²)
Quantity Per Pallet	Edgemere Tiles – 240
Battens Required	75mm gauge – 2.9 lin.m/m ² 100mm gauge – 3.1 lin.m/m ²
Recommended Batten Size	38mm x 25mm for rafters not exceeding 450mm centres 50mm x 25mm for rafters not exceeding 600mm centres
Underlay	Vapour Permeable (MA33150) Non Vapour Permeable (MA33145)
Tile Colours Available	Smooth Brown (S) (MA35552) Anthracite (S) (MA35580) Smooth Grey (S) (MA35528) Old English Dark Red (S) (MA35580) S – Smooth Finish



Smooth Brown
MA35552



Anthracite
MA35580



Smooth Grey
MA35528



Old English Dark
Red MA35580