

EXISTING SECTION THROUGH MEDICAL RECORDS

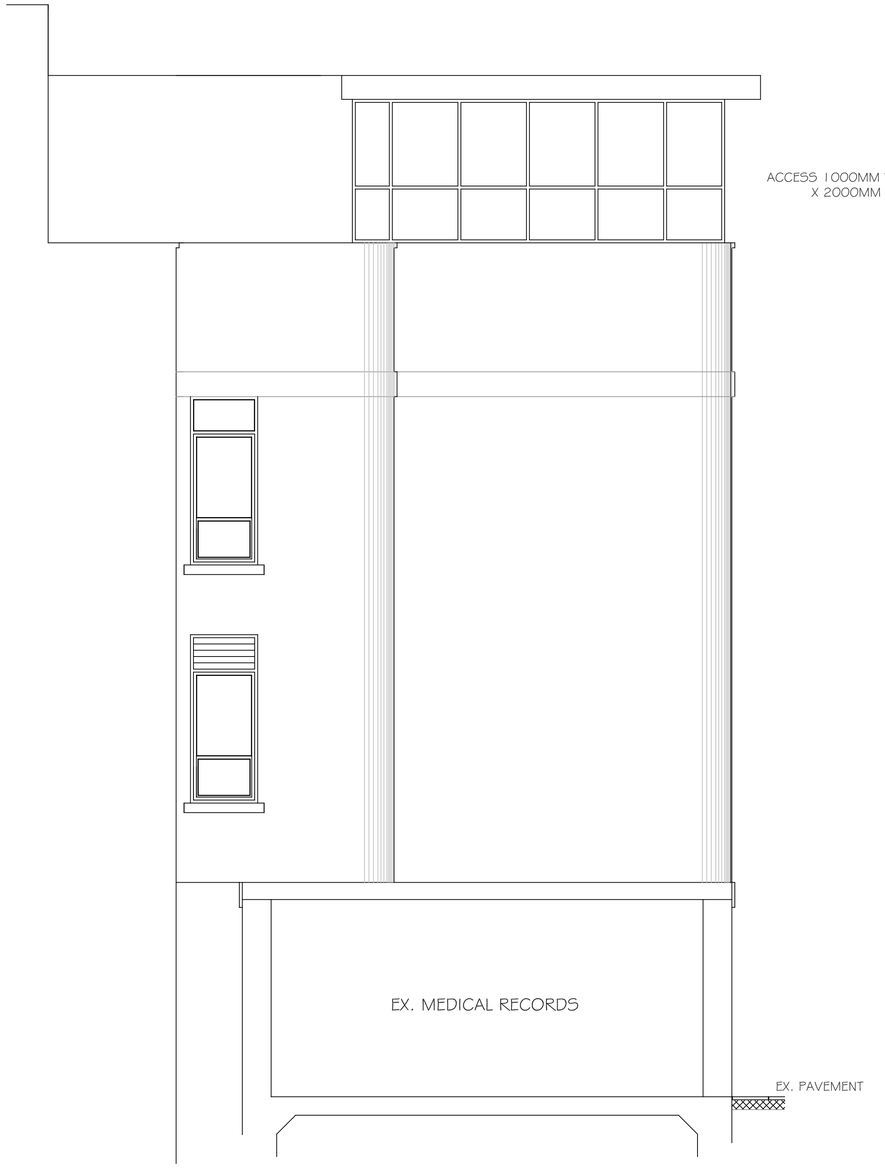

PROPOSED SECTION THROUGH NEW BOILER ROOM

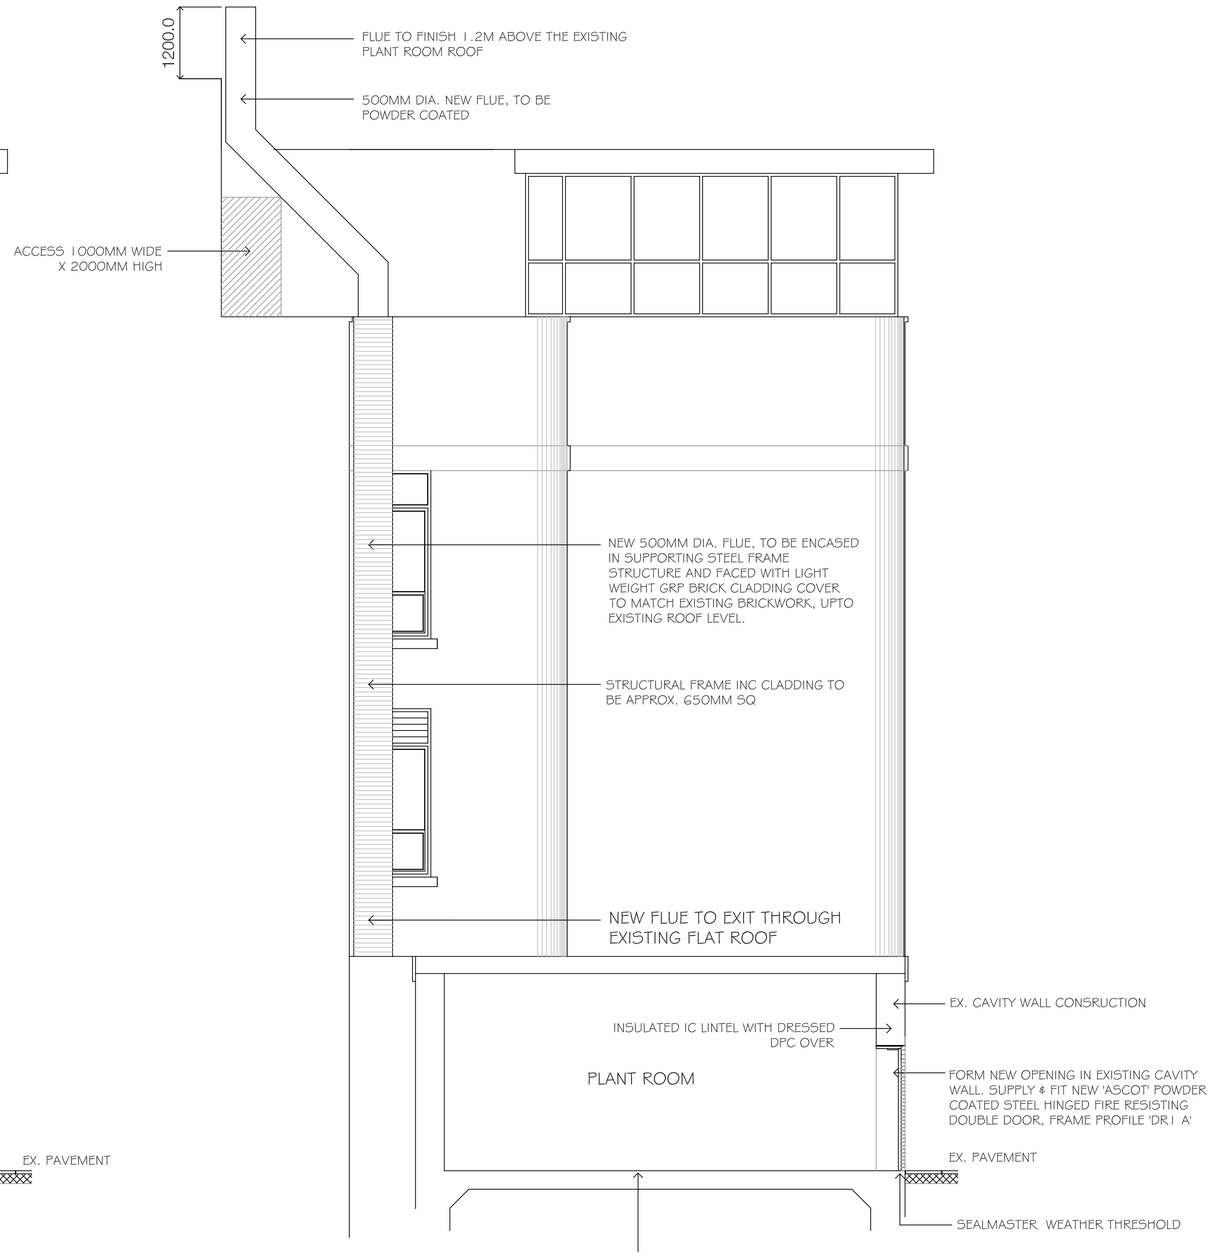

REMOVE EXISTING FLOOR FINISH, AND PREPARE EXISTING FLOOR FINISH TO RECIEVE NEW RIW TOUGHSEAL EPOXY MEMBRANE. NEW FLOOR FINISH TO BE TAKEN 150MM HIGH, UP ALL WALLS.

ALL SURFACES MUST BE CLEANED OF ALL GREASE, DUST, CEMENT LAITANCE AND OTHER CONTAMINANTS, BEFORE APPLY NEW RIW TOUGHSEAL EPOXY MEMBRANE.

SLIP RETARDANT FINISH TO BE ACHIEVED BY DRESSING THE SECOND COAT OF RIW TOUGHSEAL WITH RIW AGGREGATE GRADE 2.

Do not scale from drawing, use figured dimensions & levels only. All dimensions & levels to be checked on site before commencing work and any discrepancies to be notified to C.A. immediately. If in doubt ask ?

QMS ISO 9001 REGISTERED FIRM

NOTE

Drawing to be read in conjunction with other architects drawings, consultant mechanical and electrical engineers drawings, structural engineers drawings and all sub-contractors.

NEW FLUE COVER

GPR BUILDING PRODUCTS LTD

Unit 2A, Ham Lane, Kingswinford,
West Midlands, DY6 7JU

01384 293042 / 274495

info@grpbuildingproducts.co.uk

New GPR lightweight brick effect cover to match existing brickwork, to mask 500O new metal extract flue to the east elevation.

Cover to be supplied in sections and fitted onto a metal frame around the flue. Metal flue and fixings to be designed by the structural engineer. Some sections of the cover to be removable to allow for maintenance of the flue.

rev	comments	initals	date
D	APPROVED FLUE OPTION	MEC	05.03.14
c	width of flue changed, and access walkway added	MEC	13.02.14
b	ex. section required by planners	MEC	22.11
A	TENDER ISSUE	MEC	20.11

merseydesigngroup

architects
interior designers
strategy planners
quantity surveyors
cdm co-ordinators

Mersey Design Group Ltd
Cleveland House
41 Shaw Street
Liverpool L6 1HL

telephone:0151 207 9431
facsimile: 0151 207 9447
e: mdg@merseydesigngroup.co.uk
w: www.merseydesigngroup.co.uk

client
Central Manchester University Hospitals NHS Foundation Trust

project
Turner Dental Hospital Heat Source and Infrastructure Works
University of Manchester
Manchester

content
SECTION THROUGH NEW PLANT ROOM

scale	sheet	date	drawn by	checked
1:50	A1	05/03/14	MEC	MEC

project number	drawing number	rev
226-01	L(-)08	D

purpose of issue
Tender

Registered in England No.: 2789905