

HERITAGE STATEMENT

1st FLOOR

31, BOOTH STREET

MANCHESTER

M2 4AF

Document prepared by :
Bluesky Design Interiors Studio 1
169, High Street
Boston Spa
Wetherby
LS23 6BH

Document ref:
1394-HER-002
FIRST ISSUE
Author FLC
Checked CEH
26th July 2025

Contents

1.0 Introduction 3

2.0 Wider Context 4

21. The Architect 4

2.2 Building Description 5

2.3 Listing Entry ..... 5 & 6

3.0 20th Century Redevelopment 7

3.1 Completed 2016 Scheme 7

3.2 Completed 2018 sub-division of floors ..... 7 & 8

4.0 Proposals 9

5.0 Heritage Impact Assessment 10

5.1 Response to NPPF 11

5.2 Existing Photographs - Internal.....12 & 13

5.3 Existing Photographs - External.....14

6.0 Conclusion 14

7.0 Summary of Supporting Information 15

8.0 Bibliography 15

9.0 Drawing register.....16

1.0 | Introduction

The building currently known as 31 Booth Street, is a Grade 2 listed commercial building. Originally named 'Fountain Court' the building is situated at the junction of Booth Street and Fountain Street in central Manchester's Upper King Street Conversation Area.

Dated 1868, the building facade is colourful brickwork with light sandstone dressings and a slate roof in a Venetian Gothic style. It is attributed to the architects Clegg & Knowles. The building was subject of significant refurbishment in the early 1980s which resulted in a facade retention scheme that also extended the building along Fountain Street.

The part of the building relating to this application is the entire first floor within 31 Booth Street.
The application site is owned by Vista Trust Corporation (UK) Ltd c/o Standard Life

Site Location:



31 BOOTH STREET

2.0 | Wider Context

CONSERVATION AREA

The building sits within the Upper King Street Conservation Area, a relatively large area which encompasses much of the traditional commercial and professional centre of Manchester. The area is contained between Cross Street and Mosley Street north to south and Market Street and Booth Street east to west.

THE TEXTILE WAREHOUSE

During the nineteenth century Manchester became the centre of the hugely expanding textile manufacturing industry, feeding on the demand from the cotton spinning towns of south Lancashire and north Cheshire for display and storage space near to the cotton exchange for their produce. The building type that developed is distinctive as a Manchester typology where textile warehouses were typically designed to combine storage, display, packing and dispatching of goods.

PALAZZOS & VENETIAN GOTHIC

The predominant style for these buildings was one based on the palazzos of Renaissance Italy. Arguably, the fashion for this style was started by Charles Barry's Athenaeum (1836-37) but it was quickly adopted by Manchester architects; typically either entirely in stone or brick with stone dressings. A significant number survive around Mosley Street, Princess Street and Charlotte Street. The use of the Venetian Gothic was led in Manchester by Alfred Waterhouse's Town Hall and Edward Salomans' Reform Club on King Street. However, a number of other practices were able to translate this style to commercial developments, often using bold contrasts in colour between brick and stone.

2.1 | The Architect

THE ARCHITECT - CHARLES CLEGG (1828-1922)

Charles Clegg was born on the 12th December 1828 in Princess Street, Manchester. He set up practice in 1851, initially on his own but later in partnership with John Knowles in 1858. Clegg would later go into partnership with his son, Charles Theodore, as Charles Clegg and Son from 1882 onwards. Clegg and his practices were evidently very successful and the period between 1860 and 1885 were tremendously productive. A large number of Manchester textile warehouses or commercial buildings of this time are attributed to him or his practice.

2.2 | The Building

The retained 1868 facade of 31 Booth Street is a 4 storey (with additional semi basement below piano nobile), red brick structure with sandstone dressings and a rusticated sandstone base. The sandstone detailing at window jambs and hoods when combined with the red brickwork gives the building a colourful appearance. This is added to by a small number of polished granite columns at the doorways. The building detailing is in line with the Venetian Gothic style and appears attractive when compared with the more severe Gothic style that developed later.

The corner site is unusual as much of the building work in this period developed on grid street pattern. The corner plot gives the design of this building a strong emphasis and provides an interesting single bay corner elevation with entrance door and windows above.

The windows are grouped in pairs on Booth Street. On Fountain Street there is a central pair of windows with a grouping of three to either side. The northern grouping of three windows at ground level are not original, as a previous doorway was replaced with a window to match the existing in the 1980s. At level 4 the windows, instead of being grouped, are continuous with several blank brick panels which appear to be original.

Both the remaining 1868 doorways have decorated stone surrounds with twisted, unfluted and polished granite columns with foliated capitals. Above the existing corner entrance, which appears to have original timber doors, is a glazed fan light whereas above the Booth Street entrance is an elaborately carved tympanum. Above this entrance are two stone roundels, one with an unidentified monogram and the other with the construction date '1868' carved in.
The redevelopment, facade retention, extension and other alterations that occurred in the early 1980s are referred to in section 3.

2.3 | Listing Entry

MANCHESTER | SJ8498SW FOUNTAIN STREET 698-1/28/138 (SIDE) 28/06/74 Nos.66 and 68 | GV II
Commercial building (perhaps warehouse or offices). Dated 1868 on doorway to Booth Street; slightly altered. Red brick in Flemish bond, with sandstone dressings and slate roof. Triangular plan on acutely-angled corner site, with very narrow 1-bay entrance front at south end. Venetian Gothic style. Four-storey 8-window facade to Fountain Street, symmetrical, with vermiculated rustication to the basement, sill-bands to all floors (the top 2 with saw-tooth bands under them), prominent bracketed cornice, steeply-pitched roof with inserted attic windows; wide segmental-headed arch in centre of ground floor with deeply-recessed window, flanked by 3-light windows which have round-headed lights with 2-centred arched banded extradoses, and shafts with carved capitals, these openings linked by foliated imposts; windows at 1st and 2nd floors in similar style, grouped 3, 2 and 3, those at 1st floor stilted; continuous arcade of stilted windows at 3rd floor. One-bay south end has round-headed doorway in stone surround, with shafts (1 twisted and 1 of polished granite), carved capitals and foliated imposts, 2-centred arched hoodmould, panelled door and plain fanlight; 2-light windows at 1st and 2nd floors, single-light window at 3rd floor. Booth Street facade, 9 windows in matching style and similar doorway at north end, with carved tympanum, and lettered roundels in the spandrels (monogram to left, "1868" to right). Interior not inspected. **Listing NGR: SJ8401198137**

2.3 | Listing Entry (cont)



Extension and Previous Entrance
The 1980s entrance to the building sits in a dark corner beneath the overhanging extension



New Building Entrance
The re-opened historic archway was re-utilised as the new building entrance in 2016

3.0 | 20th Century Redevelopment

To be read in conjunction with Heritage Plan - Drawing 1394-01-HE-01

The full history of the building is unknown, however, by 1975 the building is referred to as being vacant and this appears to have precipitated significant refurbishment and alteration to the building. The result of this was the complete demolition of the buildings' interior and the insertion of a new steel frame structure with concrete beam and block floors behind the retained brick and stone elevations. A commercial grade metal-pan raised access floor was added as part of the refurbishment. As such nothing remains or is known of the original internal construction, layout and decorative scheme.

A steeply pitching slate tiled roof with dormer windows and with a curtain wall faced extension to the north was also added at this time. Subsequent to the works in the 1980s the ground floor office space and reception area were subject to some internal alterations in the late 1990s / early 2000s.

3.1 | Completed 2016 Scheme

2016 saw the completion of a consented scheme to fully refurbish the building as well as introduce a new entrance and reception lobby whilst providing level access to the building (refer to applications 108966/FO/2015 & 108965/LO/2015).

These works resolved the issues that had resulted in the building being vacant and this was achieved as follows:-


- Moving the main entrance of the building from 1980s extension and re-using an existing previously locked up though blocked up historic doorway on Booth Street.
- Internally to provide a large open entrance foyer enabling full level access throughout.
- General refurbishment of the dated office spaces including re-ordering of WCs.
- Provision of basement bike stores, lockers and showers.
- Replacement of the poor quality 6th floor cladding of the 1980s extension with dark grey metal cladding.
- Inclusion for A3 use in the ground and basement floors and provision of riser the full height of the building internally for ventilation as required. This space would utilise the existing historic corner entrance.

3.2| 2018 sub-division of floors

A previuos application was granted to split floor plates into two separate office suites in order that a range of smaller scale tenants could be accommodated (refer application 120473/LO/2018)

The sub-dividing partition was formed as a plasterboard clad stud wall, skim plastered and decorated. This was a contemporary manner of dealing with partitioning, in line with the modern and refurbished internal finishes found throughout the building - as noted no interior elements exist that pre-date the 1980s facade retention and therefore interior finishes are considered to be of low historical significance. The proposed works remove this partition at first floor level to re-instate the single demise.

3.2 | Subdivision of floors (cont)

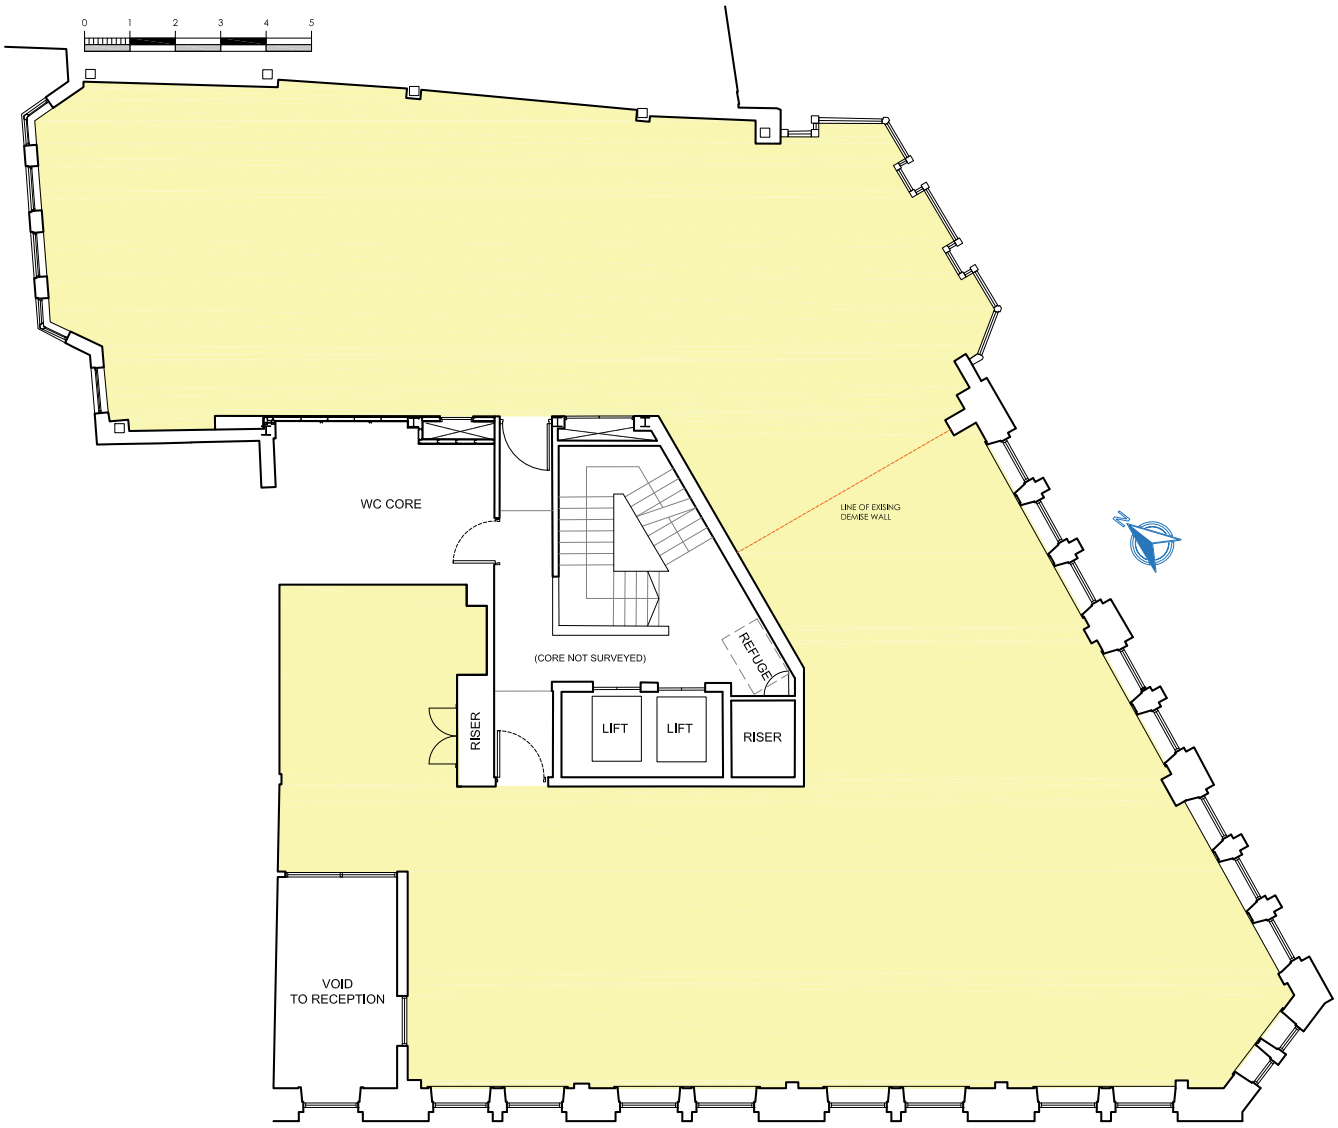

1st Floor - Single Floorplate
Single occupancy floor suite.
(Line of demise split shown for information.)

4.0| 2024 Proposals - this application

This application relates to the fit-out of First Floor, 31 Booth Street, Manchester. The scope of works includes the removal of the existing party wall between the East and West suites in order to create a single first floor demise.

The proposals include the construction of quiet rooms in stud and plasterboard with glass doors, plus the installation of a tea point and print point.

Various feature lights are proposed, along with suspended acoustic baffles above the reception seating area near the entrance.

Internal finishes include acoustic panelling, floor finishes and surface decoration. The existing West suite glazed meeting rooms will be retained. This will be redecorated as part of the proposed works to bring the scheme into line with the other suites in the building.

There will be no change or works involving the existing void to reception located over the ground floor entrance.

Refer to drawings itemised in the Drawing Register - Section 9 for details of the extent of retained and new fit-out.

5.0 Heritage Impact Assessment

The significance of this heritage asset can be summarised as follows:


ARCHITECTURAL INTEREST

- The scale and prominence of the building, including the contribution it makes to its setting: marking a prominent corner with the Conservation Area.
- The principle retained external elevations of 1868 and their key features, including large windows in deep reveals with elaborate stone and brick details.

HISTORIC INTEREST

- A good example of poly-chromatic Venetian Gothic style as applied to commercial premises by an architect with a large number of listed warehouse type buildings in Manchester city centre.

The significance of the building is related almost entirely to its external form due to the facade retention scheme of the 1980s and therefore the insertion of new internal partition walls has no appreciable impact on any element of the buildings significant fabric. Furthermore, the proposed works are entirely consistent with these principal objectives helping to regain active use of the building and securing its future usage.

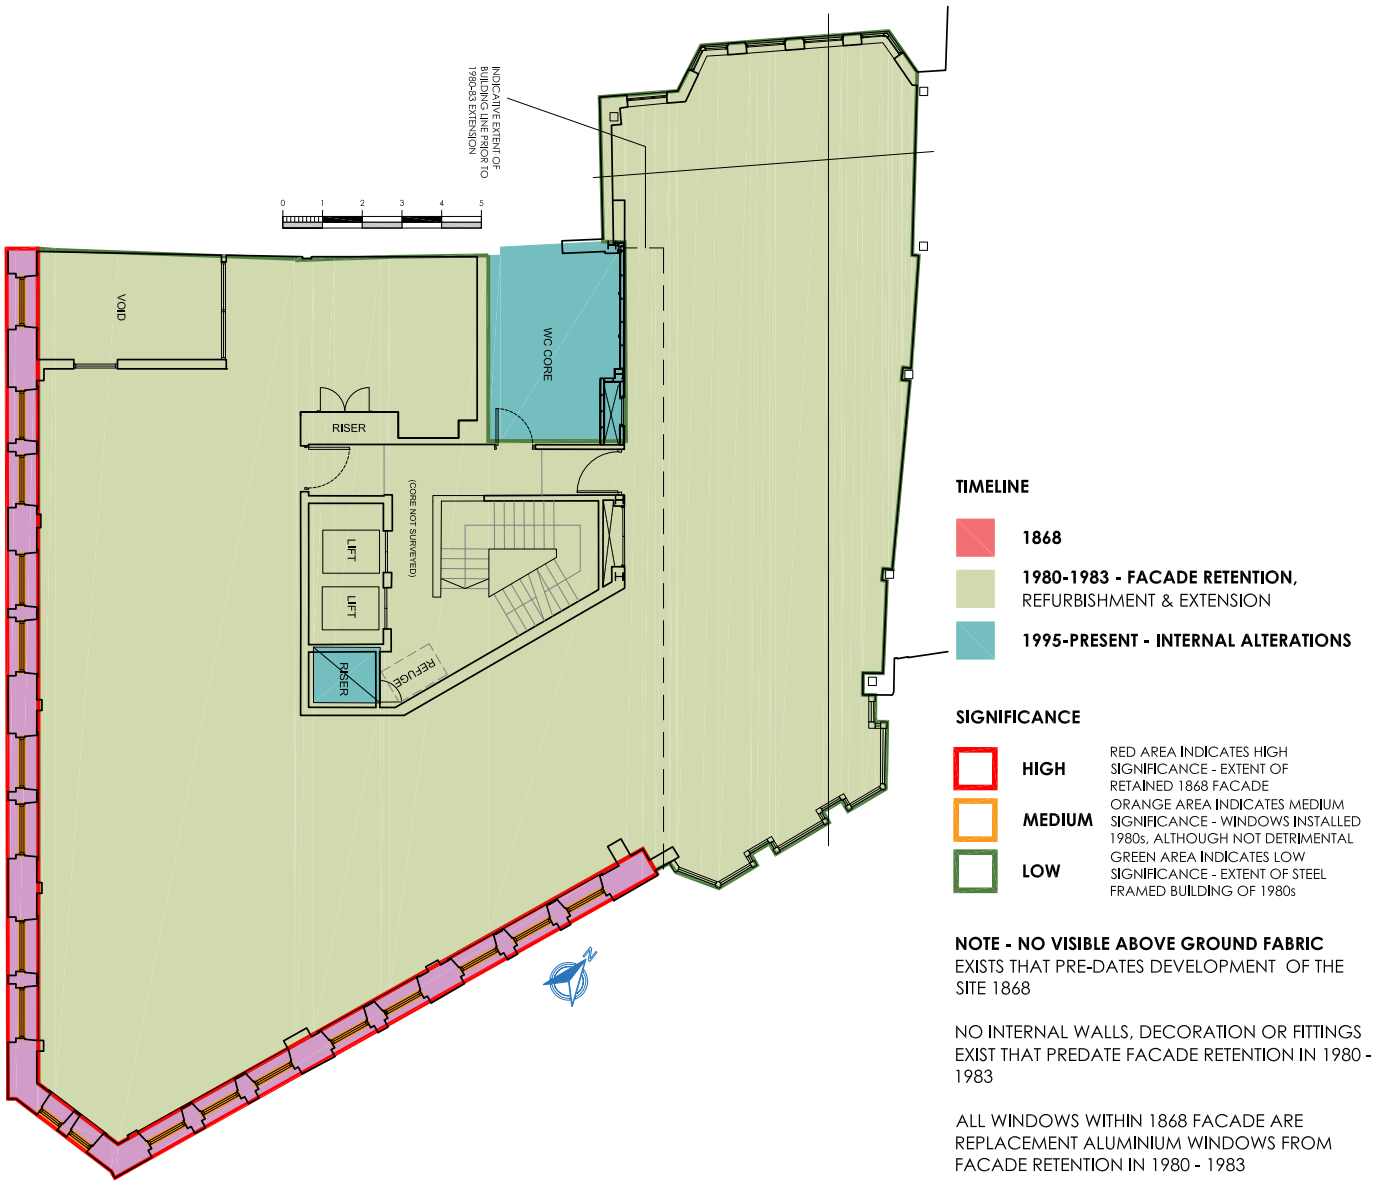

5.1 Specific Response NPPF

CONSERVING & ENHANCING THE HISTORIC ENVIRONMENT

Clause 195 requires LPAs to ensure that heritage assets are conserved in a manner appropriate to their significance, so that they can be enjoyed by future generations. Clause 196 requires that plans should set out a positive strategy for the conservation and enjoyment of the historic environment. This strategy includes the desire to enhance the significance of heritage assets by putting them to uses consistent with their conservation.
The intention of the previous works was to provide a variety of floorplate sizes suiting a number of tenants in order to secure the buildings on-going usage as commericial space. The proposed internal works to the first floor re-inforce this potential for ongoing commerical use.

Clause 200 requires applicants to describe the significance of any heritage assets affected, including any contribution made by their setting. Clause 201 states that LPAs should identify and assess the significance of any heritage asset that may be affected by a proposal. This assessment should be taken into account when considering the impact of the proposal in order to minimise conflict between the heritage asset's conservation and any aspect of the proposal. The history of the building and the significance of the elements of the heritage asset are outlined in sections 2.0, 3.0 & 5.0 of this statement and in summary identify:-

A retained facade of a Venetian Gothic commercial building dated 1868 which was subject to a facade retention scheme in the 1980s. None of the original structure, internal layouts, fittings, walls remain and their form at the time of demolition is unknown.
An inserted 8 storey (including plant room) steel framed 1980s structure and extension of relatively low quality.- Minor internal partitions at level 0 in the late 1990s early 2000s and full refurbishment and internal re-ordering, including new entrance on Booth Street completed in 2016.
The works proposed are very modest, the impact of which both physically and visually, is on modern and recently refurbished internal finishes.

Clause 205 states that when considering the impact of a proposed development on the significance of a designated heritage asset, great weight should be given to the asset's conservation. This is irrespective of whether any potential harm amounts to susbstantial harm, total loss, or less than substantial harm to its significance.
The proposed upgrading works do not involve the loss or destruction of any of the original significance of the 1868 building. The proposed works to the first floor are minimal and do not include any interventions with the original heritage structure.

Clause 207 concerns the substantial loss or harm to the Heritage asset.
The proposed upgrading works do not involve the loss or destruction of any of the original historic fabric of the 1868 building.

Clause 208 concerns developments leading to less than substantial harm to the Heritage asset. This harm should be weighed against the public benefits, including securing its optimum viable use.
The proposed internal works to the first floor maximise its potential for ongoing commerical use as office space.

5.2 Site photographs - 1st Floor Internal - West Wing



1. VIEW TOWARDS HERITAGE APEX OF SUITE
2. VIEW TOWARDS FOUNTAIN STREET ELEVATION
3. GENERAL VIEW TOWARDS TEAPOINT AND ENTRANCE - SHOWING WALL PANELLING (TO BE RETAINED)
4. GENERAL VIEW - EXISTING GLAZED MEETING ROOM (TO BE RETAINED)
5. VIEW FROM INTERIOR OF RETAINED MEETING ROOM INTO OFFICE SPACE.
6. GENERAL VIEW THROUGH OFFICE SPACE SHOWING CEILING BUKHEAD DEATILS (TO BE RETAINED)














5.2 Site photographs (cont) - 1st Floor Internal East Wing




1. VIEW THROUGH RECEPTION
2. VIEW TOWARDS FOUNTAIN STREET ELEVATION BAY WINDOW.
3. GENERAL VIEW THROUGH INTERNAL MEETING ROOM TO REAR TEAPOINT.
4. GENERAL VIEW TOWARDS TEAPOINT
5. VIEW FROM REAR TOWARDS TEAPOINT AND INTERNAL MEETING ROOM.
6. CEILING DETAIL SHOWING DROPPED SOFFITS, A/C VENTS AND SUSPENDED CEILING.



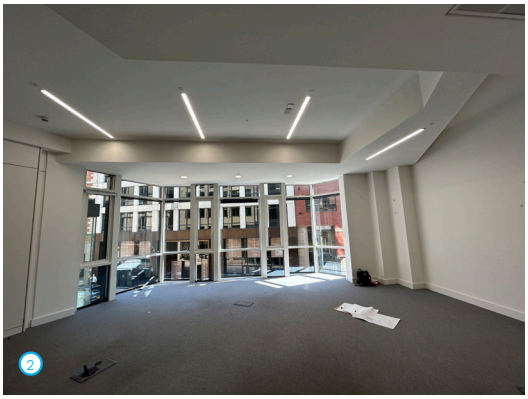





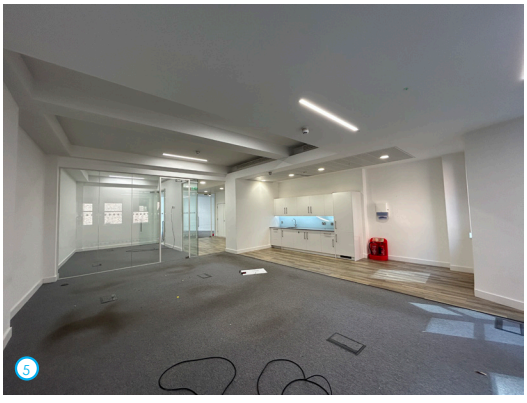



5.3 Site photographs - 1st Floor External









FIRST FLOOR LEVEL - LOCATION OF PROPOSED INTERNAL WORKS.
(NO WORKS TO EXTERIOR TO BE UNDERTAKEN)

6.0 Conclusion

The fit-out of the first floor does not have an impact upon the historically significant elements of the building. The design is in line with the modern and refurbished internal finishes found throughtout the building - as noted, no interior elements exist that predate the 1980s facade retention and therefore interior finishes are considered to be of low historical signifcance.

7.0 Summary of Supporting Information

Heritage Statement

Prepared by Bluesky Design

(Contained within the above document)

Existing and Proposed Drawings

Prepared by Bluesky Design

Please refer to drawing issue register 9.0

Visual Concept Document

Prepared by Bluesky Design

8.0 Bibliography

Publications:

British Council for Offices - Guide to Specification - 2014
Cocks. H & Wyke. T - Public Sculpture of Greater Manchester - LUP:2004
Department for Communities and Local Government - National Planning Policy Framework (NPPF) - 2013
Dixon, Roger; Muthesius, Stefan - Victorian Architecture - Thames and Hudson1985
Hartwell, Clare - Manchester - Pevsner Architectural Guides - Penguin:2001
Parkinson Bailey. J.J - Manchester - An Architectural History - MUP:2000
English Heritage - Manchester: The Warehouse Legacy - 2002

Other Sources:

Biographical information on Charles Clegg & Charles Theodore Clegg from Manchester and Salford at the Close of the 19th Century: Contemporary Biographies - available at
http://www.spinningtheweb.org.uk/bookbrowse.php?irn=2583&sub=&theme=home&crumb=
Conservation Area information available at
http://www.manchester.gov.uk/info/511/conservation_areas/916/upper_king_street_conservation area
Trade Directories - Slater's Manchester and Salford Directories 1876, 1883 & 1911 - available at
http://specialcollections.le.ac.uk/cdm/landingpage/collection/p16445coll4

This heritage statement draws on information obtained by referencing OMI Architects Heritage Statement for application No.120473/LO/2018 as published on the planning portal.

9.0 Drawing Register 1st Floor

Client:	**Vista Trust Corporation (UK) Limited JLL**
Project:	31 Booth Street Manchester
Designer:	Shona Taylor / Fiona Collier
Client contact:	George Curwen FBI / Keiran Melfi JLL
Sheet Number:	1
BSD Job Number:	**1394 - FIRST FLOOR**

blueskydesign interiors limited
Unit 1, 169 High St, Boston Spa
LEEDS LS23 6BH
01937 845399

Drawing Title	**Number**
Layout Drawings	
First Floor Existing Layout	**1394-01-EX-01**
First Floor Existing Ceiling Layout	**1394-01-EX-02**
First Floor Demolition Layout	**1394-01-DE-01**
First Floor Proposed Reflected Ceiling Plan	**1394-01-CL-01**
First Floor Proposed Ceiling details	**1394-01-CL-02**
First Floor Raised Access Floor	**1394-01-ET-01**
First Floor General Arrangement Layout	**1394-01-GA-01**
First Floor Furniture Key	**1394-01-FN-01**
First Floor Partition Layout	**1394-01-PT-01**
First Floor Coordinated Ceiling + Partition Layout	**1394-01-PT-02**
First Floor Partition Elevations Sheet 1	**1394-01-PE-01**
First Floor Partition Elevations Sheet 2	**1394-01-PE-02**
First Floor Flooring Layout	**1394-01-FL-01**
First Floor Decorations Layout	**1394-01-DC-01**
First Floor Hazards	**1394-01-HZ-01**
Heritage Drawings	
First Floor Heritage drawing	**1394-01-HE-01**
First Floor - Existing + Proposed Sections Sheet 1 of 2	**1394-01-HE-02**
First Floor - Existing + Proposed Sections Sheet 2 of 2	**1394-01-HE-02.1**
Building Location plan	**1394-01-HE-03**
Detail Drawings	
Wall Panelling	**1394-01-JN-01**
Teapoint	**1394-01-KT-01**