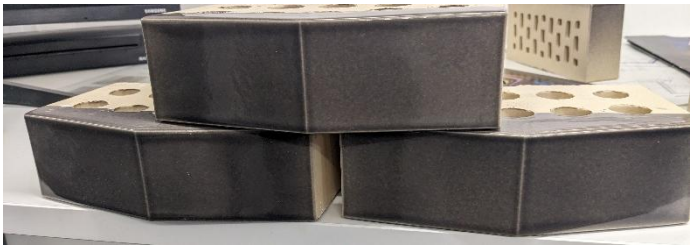

PROJECT: PREMIER INN, Rochdale Road, Manchester

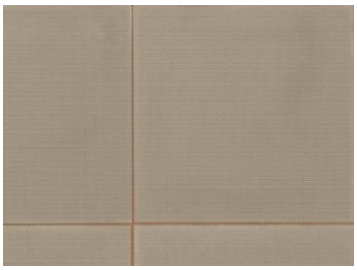

Schedule of Proposed Building Materials-

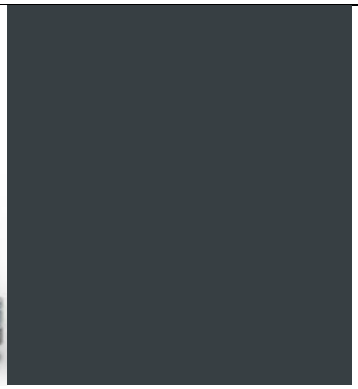
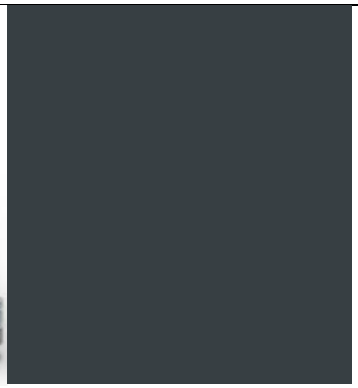

Rev - //

ALLISON PIKE

Proposed Material and location	Material Specification:	Images / Details:
1. External brickwork	**Manufacturer:** Forterra **Type:** Bamford Blend **Mortar colour:** Natural **Mortar profile:** Bucket handle pointing to all brickwork with the exception of the projecting header brickwork which will have weather struck pointing.	
2. External Vents to Brickwork	**Manufacturer:** Forterra **Type:** Bamford Blend **Mortar colour:** Natural **Mortar profile:** Bucket handle	
3. Glazed Sawtooth Brickwork between windows	**Manufacturer:** Taylor Maxwell **Type:** Sri Lanka Dark Grey **Mortar colour:** Natural **Mortar profile:** Bucket handle	 

4. Partially Reflective Cladding to 10th floor and framing the Rochdale Road elevation	**Manufacturer:** VM Zinc **Type:** Quartz-Zinc	
5. Concrete Columns on the Rochdale Road elevation	Smooth concrete column cast on site	
6. External vents above ground floor curtain walling on the Rochdale Road elevation and to rear plant areas	Aluminium polyester powder coated RAL7016 Anthracite Grey	 RAL 7016

7. Fin Cladding (colour to match zinc cladding)	Rectangular profile aluminium polyester powder coated RAL7037 Dusty Grey **Backing materials** Bamford Blend brickwork or Plant room louvres polyester powder coated RAL7016	 Fin Profile  Fin colour RAL 7037 (comparison with the zinc specification)
8. Flat roof areas	**Main Roof:** Liquid applied inverted flat roof system with ballast **Walkways and plant deck areas:** Marshalls Standard Pimple Paving Square Edge 600 x 600 x 63mm, colour natural	
9. Curtain walling to ground floor Rochdale Road elevation and end of bedroom corridors	**Manufacturer:** Technal Tental **Product:** Visible Grid 50mm thermally broken aluminium curtain walling Aluminium frame polyester powder coated to RAL7016 Anthracite Grey	  RAL7016

10. Upper floor windows	**Manufacturer:** Technal Tental **Product:** SOLEAL Next 75 Window Aluminium frame polyester powder coated to RAL7016 Anthracite Grey	  RAL7016
11. 25°Angled window frames to 10th floor	**Manufacturer:** Technal Tental **Product:** SOLEAL Next 75 Window Aluminium frame polyester powder coated to RAL7016 Anthracite Grey	  RAL7016
12. Balustrades to rear plant area	Aluminium flat bar balustrade polyester powder coated RAL 7016	 RAL7016
13. Balustrade to 10th floor Rochdale Road elevation	Aluminium flat bar balustrade polyester powder coated RAL 7037 to match the zinc cladding	 Balustrade colour RAL 7037 (comparison with the zinc specification)

14. Cills and parapet cappings	Aluminium, polyester powder coated RAL7016 Anthracite Grey	RAL7016
15. Main entrance door framing	Aluminium, polyester powder coated RAL7016 Anthracite Grey	RAL7016
16. Fire escape door framing, rear solid service/fire escape doors	Aluminium, polyester powder coated RAL7016 Anthracite Grey	RAL7016
16. Rainwater goods	All internal	N/A