
| REVISION | DATE | DESCRIPTION |
|---|---|---|
| A | 17/01/24 | UPDATED TO PLANNING COMMENTS |
| B | 27/05/25 | BIRD BRICKS INDICATED |




**PROPOSED ELEVATION A**
1:100 @ A3

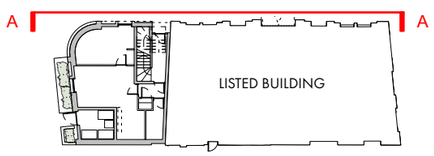


**KEY** SITE PLAN

MATERIAL NOTES:

01 **BRICK TYPE 01**
IBSTOCK, BIRTLEY COMMERCIAL RED
FLEMISH BOND. DARK MORTAR. FLUSH JOINTS

02 **BRICK TYPE 02**
IBSTOCK, BIRTLEY COMMERCIAL RED
RECESSED 30MM HEADER COURSE. DARK MORTAR. FLUSH JOINTS

03 **BRICK TYPE 03**
IBSTOCK, BIRTLEY COMMERCIAL RED
STACK BONDED SOLDIER COURSE. DARK MORTAR. FLUSH JOINTS

04 **ALUMINIUM CASEMENT WINDOWS**
PPC FINISH : RAL 1035

05 **ALUMINIUM FRAMED CURTAIN WALLING**
ESCAPE DOOR PROVIDED AT GROUND FLOOR.
ANODISED FINISH: UA 541

06 **ALUMINIUM EXTERNAL ENTRANCE DOOR**
ANODISED FINISH: UA 541

07 **PRE CAST STONE COPING STONE**
WET CAST/ ACID ETCH/ PORTLAND FINISH

08 **PRE CAST STONE CILLS/STRING COURSE**
WET CAST/ ACID ETCH/ PORTLAND FINISH

09 **BESPOKE TERRACOTTA ROSES**
TO FORM PART OF LOAD BEARING CONSTRUCTION

10 **BRICK PLANTER**
RED BRICK
FLEMISH BOND. CAPPING PIECE IN BRICK. DARK MORTAR. FLUSH JOINTS

11 **ALUMINIUM EXTERNAL BIN STORE DOOR**
ANODISED FINISH: UA 541

12 **BRICK TYPE 04**
IBSTOCK, BIRTLEY COMMERCIAL RED
FLEMISH BOND WITH HEADER BRICK OMITED.
DARK MORTAR. FLUSH JOINTS

13 **BIRD BRICK**
TO CONTRACTORS SPECIFICATION


OMIArchitects

31 Blackfriars Road, Salford, Manchester, M3 7AQ
+44(0)161 832 3242 / info@omiarchitects.com / www.omiarchitects.com


| | | | | | | |
|---|---|---|---|---|---|---|
| PROJECT | LAYSTALL STREET – LISTED BUILDING EXTENSION | | | | | |
| DRAWING | PROPOSED ELEVATION LAYSTALL STREET | | | | | |
| DATE | AUG 23 | DRAWN BY | DS | SCALE | 1:100 | @A3 |
| JOB NO. | 1383 | DWG.NO. | L0360 | | | |