
REVISION	DATE	DESCRIPTION
A	17/01/24	UPDATED TO PLANNING COMMENTS
B	27/05/25	BIRD BRICKS INDICATED



PROPOSED ELEVATION B
1:100 @ A3

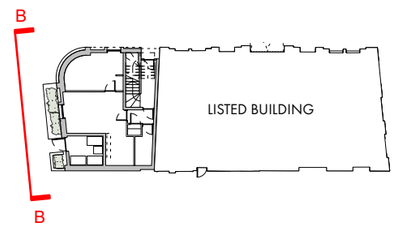

KEY SITE PLAN

MATERIAL NOTES:

01 **BRICK TYPE 01**
IBSTOCK, BIRTLEY COMMERCIAL RED
FLEMISH BOND. DARK MORTAR. FLUSH JOINTS

02 **BRICK TYPE 02**
IBSTOCK, BIRTLEY COMMERCIAL RED
RECESSED 30MM HEADER COURSE. DARK MORTAR. FLUSH JOINTS

03 **BRICK TYPE 03**
IBSTOCK, BIRTLEY COMMERCIAL RED
STACK BONDED SOLDIER COURSE. DARK MORTAR. FLUSH JOINTS

04 **ALUMINIUM CASEMENT WINDOWS**
PPC FINISH : RAL 1035

05 **ALUMINIUM FRAMED CURTAIN WALLING**
ESCAPE DOOR PROVIDED AT GROUND FLOOR.
ANODISED FINISH: UA 541

06 **ALUMINIUM EXTERNAL ENTRANCE DOOR**
ANODISED FINISH: UA 541

07 **PRE CAST STONE COPING STONE**
WET CAST/ ACID ETCH/ PORTLAND FINISH

08 **PRE CAST STONE CILLS/STRING COURSE**
WET CAST/ ACID ETCH/ PORTLAND FINISH

09 **BESPOKE TERRACOTTA ROSES**
TO FORM PART OF LOAD BEARING CONSTRUCTION

10 **BRICK PLANTER**
RED BRICK
FLEMISH BOND. CAPPING PIECE IN BRICK. DARK MORTAR. FLUSH JOINTS

11 **ALUMINIUM EXTERNAL BIN STORE DOOR**
ANODISED FINISH: UA 541

12 **BRICK TYPE 04**
IBSTOCK, BIRTLEY COMMERCIAL RED
FLEMISH BOND WITH HEADER BRICK OMITED.
DARK MORTAR. FLUSH JOINTS

13 **BIRD BRICK**
TO CONTRACTORS SPECIFICATION

OMIArchitects

31 Blackfriars Road, Salford, Manchester, M3 7AQ
+44(0)161 832 3242 / info@omiarchitects.com / www.omiarchitects.com

PROJECT	LAYSTALL STREET – LISTED BUILDING EXTENSION					
DRAWING	PROPOSED ELEVATION PIGEON STREET					
DATE	AUG 23	DRAWN BY	DS	SCALE	1:100	@A3
JOB NO.	1383	DWG.NO.	L0361			