

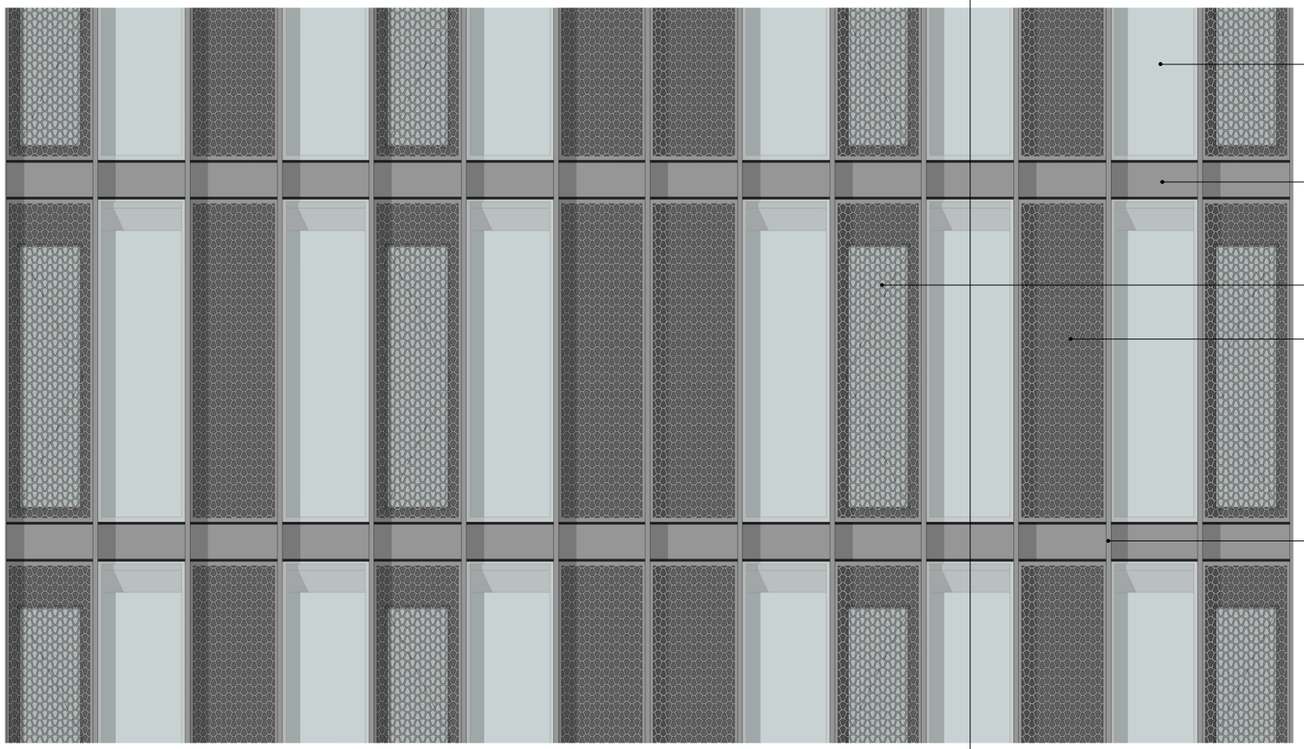


Detail Elevation - Typical East/ West Downward Facing

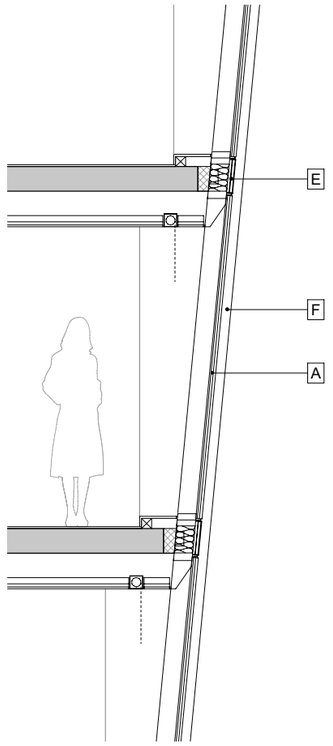

Detail Section - Typical East/ West Downward Facing

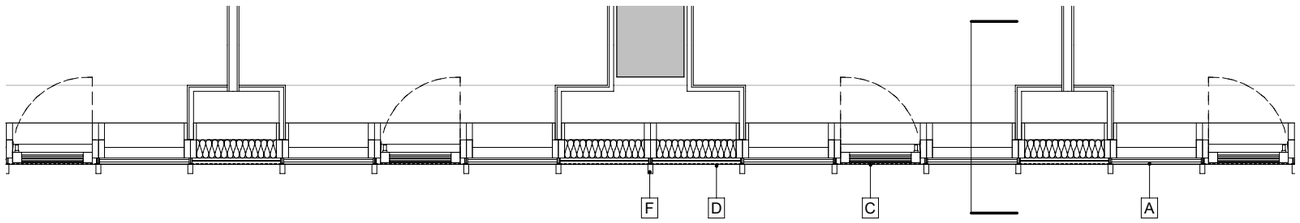

Detail Plan - Typical East/ West Downward Facing

DETAILS - MATERIALS KEY

- A Clear glazed unit
- B Glass fronted opaque unit with 100% ceramic frit behind
- C Perforated aluminium purge vent panel with glazed door behind
  Finish - Anodised 'dark grey'
- D Perforated aluminium panel with solid aluminium panel behind
  Finish - Anodised 'dark grey'
- E Solid aluminium horizontal spandrel panel
  Finish - Anodised 'dark grey'
- F Projecting curtain wall fin at 750mm centres
  Finish - Anodised 'dark grey'
- G Aluminium profile cap
  Finish - Anodised 'dark grey'
- H 250mm deep projecting curtain wall fin
  Finish - Anodised 'dark grey'
- I Clear glazed balustrade
- J Perforated aluminium panel
  Finish - PPC 'bright clay'
- K Projecting curtain wall fin at 750mm centres
  Finish - Anodised 'bronze'
- L Projecting horizontal curtain wall fin
  Finish - Anodised 'bronze'
- M Aluminium coping
- N Perforated aluminium panel with vent behind
  Finish - Anodised 'dark grey'
- O Tapered concrete truss
- P Glass fronted door
- Q Aluminium soffit panel
  Finish - Anodised 'dark grey'
- R Aluminum mullion
  Finish - Anodised 'bronze'
- S Metal canopy with integrated downlighting
  Finish - Anodised 'bronze'
- T Glazed door with aluminium frame
  Finish - Anodised 'bronze'
- U Glazed sliding door
- V Geometric ceramic tile facade
- W Perforate metal service yard gates
  Finish - Anodised 'bronze'
- X Aluminium soffit with feature lighting
  Finish - Anodised bronze'
- Y Signage zone

This drawing is copyright
Do not scale off dimensions.
All dimensions to be checked on site by Contractor.
Contractor to report any dimensional discrepancies, errors or omissions prior to commencing on site.

Rev.	Date	Description
P01	26-03-2024	Planning Issue
P02	31-10-2024	Planning Issue - Hotel & Residential

Project Title
Viadux Phase 2 - Plot 2a & 2b
Manchester

Drawing Title
Viadux Phase 2 - Plot 2a
Typical East/ West Downward Facing
Facade Detail

Job No
10448

Scale
1:50 @ A3
1 : 25 @ A1

Status
PLANNING

SHP Drawing Code
10448-SHP-ZC- A-B5D9-G251-DE-XX-102

Revision
P02

simpsonhaugh
Manchester +44 (0)161 835 2345
London +44 (0)20 7549 4000

© SIMPSONHAUGH ARCHITECTS LTD 2024