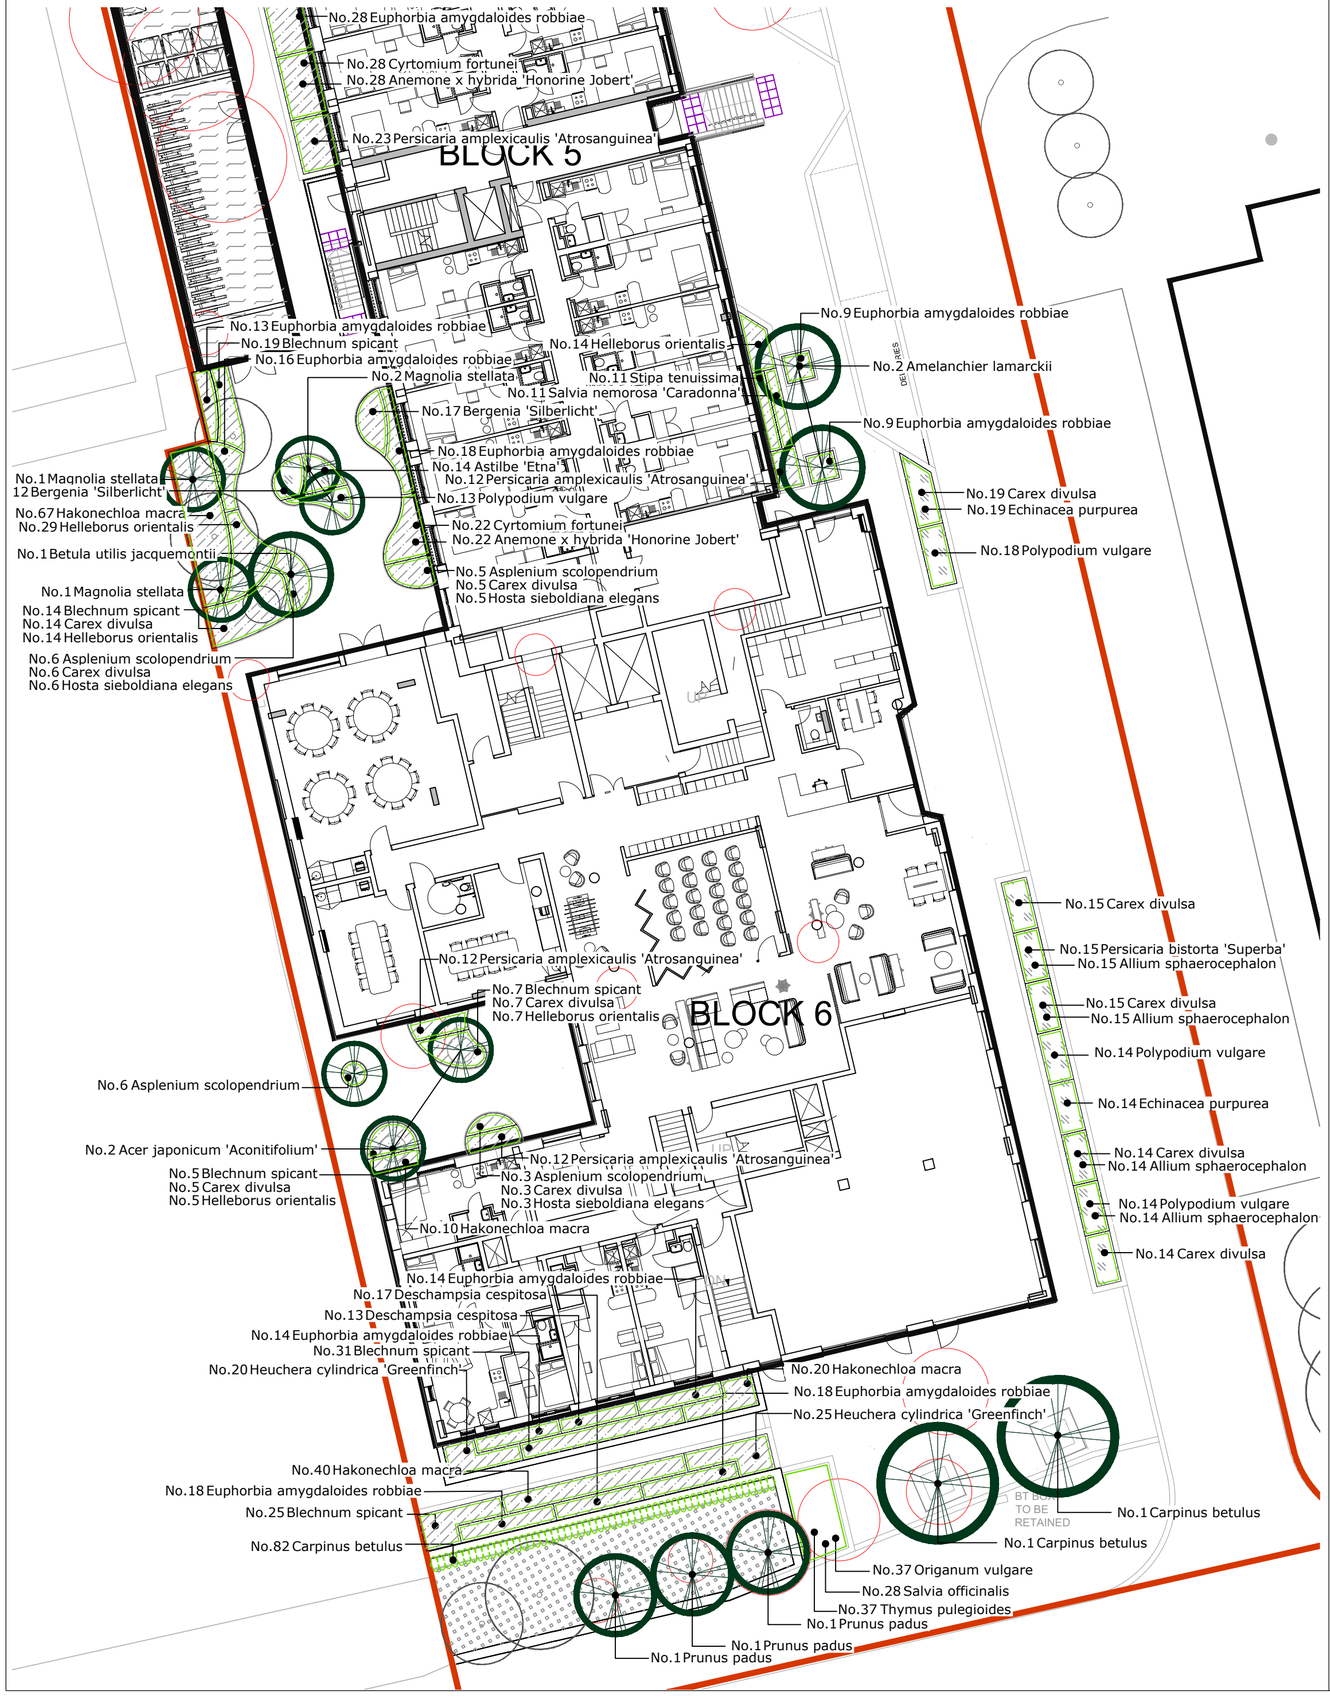



Victoria Point Planting Schedule

Trees

| Number | Species | Height | Girth | Specification |
|---|---|---|---|---|
| 19 | Acer campestre | 350-425cm | 12-14cm | Heavy Standard: 5 brks: 3x: B: Clear Stem min. 200cm |
| 1 | Acer campestre 'Elsrijk' | 400-450cm | 14-16cm | Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm |
| 9 | Amelanchier lamarckii | 300-350cm | 12-14cm | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 23 | Betula utilis jacquemontii | 250-300cm | | Multi-Stemmed: Bushy: 2 Stems: 3x: RB |
| 2 | Carpinus betulus | 400-450cm | 14-16cm | Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 3 | Crataegus laevigata 'Paul's Scarlet' | 300-350cm | 10-12cm | Selected Standard: 4 brks: 2x: RB: Clear Stem 175-200cm |
| 9 | Crataegus monogyna | 350-425cm | 12-14cm | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 10 | Prunus padus | 400-450cm | 14-16cm | Extra Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 17 | Prunus serrula tibetica | 350-425cm | 12-14cm | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 6 | Robinia pseudoacacia 'Umbraculifera' | 200-300cm | 10-12cm | Selected Standard: 4 brks: 2x: RB: Clear Stem 175-200cm |
| 20 | Sorbus aucuparia | 350-425cm | 12-14cm | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |

Hedges

| Number | Species | Height | Pot Size | Specification | Density |
|---|---|---|---|---|---|
| 193 | Carpinus betulus | 80-100cm | 2L | 1+1: Transplant - seed raised: Branched: 3 brks: C | 0.4Ctr Double Staggered at 0.4m offset |

Shrubs

| Number | Species | Height | Pot Size | Specification | Density |
|---|---|---|---|---|---|
| 2 | Acer japonicum 'Aconitifolium' | 125-150cm | 25-35L | Branched: 3 brks: C | Counted |
| 86 | Cistus 'Silver Pink' | 20-30cm | 2L | Bushy: 3 brks: C | 5/m² |
| 435 | Lonicera nitida 'Maigrün' | | 2L | Bushy: 3 brks: C | 5/m² |
| 4 | Magnolia stellata | 125-150cm | 35-45L | Branched: 5 brks: C | Counted |
| 2 | Magnolia x soulangeana | 350-425cm | 45-85L | Heavy Standard: 5 brks: C: Clear Stem 150-175cm | Counted |

Herbaceous

| Number | Species | Pot Size | Specification | Density |
|---|---|---|---|---|
| 177 | Achillea 'Walther Fünckе' | 3L | Full Pot: C | 5/m² |
| 112 | Anemone hupehensis 'Prinz Heinrich' | 2L | Full Pot: C | 5/m² |
| 103 | Anemone x hybrida 'Honorine Jobert' | 3L | Full Pot: C | 5/m² |
| 146 | Astilbe 'Etna' | 2L | Full Pot: C | 5/m² |
| 160 | Bergenia 'Silberlicht' | 2L | Full Pot: C | 5/m² |
| 33 | Echinacea purpurea | 2L | Full Pot: C | 5/m² |
| 85 | Erysimum 'Bowles' Mauve' | 2L | Full Pot: C | 5/m² |
| 701 | Euphorbia amygdaloides robbiae | 2L | Full Pot: C | 5/m² |
| 183 | Geranium macrorrhizum 'Ingwersen's Variety' | 3L | Full Pot: C | 5/m² |
| 192 | Geum 'Mrs J. Bradshaw' | 3L | Full Pot: C | 5/m² |
| 102 | Helenium 'Sahin's Early Flowerer' | 3L | Full Pot: C | 5/m² |
| 246 | Helleborus orientalis | 3L | Full Pot: C | 5/m² |
| 124 | Heuchera cylindrica 'Greenfinch' | 2L | Full Pot: C | 5/m² |
| 50 | Iris sibirica | 2L | Full Pot: C | 4/m² |
| 37 | Origanum vulgare | 2L | Full Pot | 4/m² |
| 294 | Persicaria amplexicaulis 'Atrosanguinea' | 3L | Full Pot: C | 5/m² |
| 170 | Persicaria bistorta 'Superba' | 2L | Full Pot: C | 5/m² |
| 87 | Salvia nemorosa 'Caradonna' | 3L | Full Pot: C | 5/m² |
| 28 | Salvia officinalis | 2L | Full Pot | 3/m² |
| 37 | Thymus pulegioides | 2L | Full Pot | 4/m² |
| 24 | Verbena bonariensis | 3L | Full Pot: C | 5/m² |
| 61 | Veronicastrum virginicum | 2L | Full Pot: C | 4/m² |

Conifers

| Number | Species | Pot Size | Specification | Density |
|---|---|---|---|---|
| 6 | Pinus sylvestris | | Leader with Laterals: 5x: RB | Counted |

Bulbs

| Number | Species | Pot Size | Bulb Size | Specification | Density |
|---|---|---|---|---|---|
| 96 | Allium schoenoprasum | 1L | | Full Pot: C | 4/m² |
| 145 | Allium sphaerocephalon | 1L | | Full Pot: C | 5/m² |

Ferns

| Number | Species | Pot Size | Specification | Density |
|---|---|---|---|---|
| 74 | Asplenium scolopendrium | 3L | Full Pot: C | 5/m² |
| 318 | Blechnum spicant | 3L | Full Pot: C | 5/m² |
| 207 | Cyrtomium fortunei | 3L | Full Pot: C | 5/m² |
| 96 | Osmunda regalis | 1.5-2L | Full Pot: C | 5/m² |
| 188 | Polypodium vulgare | 1.5-2L | Full Pot: C | 5/m² |

Grasses

| Number | Species | Pot Size | Specification | Density |
|---|---|---|---|---|
| 91 | Calamagrostis x acutiflora 'Karl Foerster' | 2L | Full Pot: C | 5/m² |
| 523 | Carex divulsa | 2L | Full Pot: C | 5/m² |
| 30 | Deschampsia cespitosa | 2L | Full Pot: C | 5/m² |
| 213 | Hakonechloa macra | 3L | Full Pot: C | 5/m² |
| 124 | Molinia caerulea | 2L | Full Pot: C | 5/m² |
| 453 | Stipa tenuissima | 2L | Full Pot: C | 5/m² |

Shrub Mix Low

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 62 | DAP LAU | Daphne laureola | Branched: 2 brks: C | 2L | 3/m² | 14.29% |
| 62 | DAP MEZ | Daphne mezereum | Branched: 3 brks: C | 3L | 3/m² | 14.29% |
| 62 | HYP AND | Hypericum androsaemum | Bushy: 5 brks: C | 3L | 3/m² | 14.29% |
| 62 | LON GRE | Lonicera pileata 'Moss Green' | Bushy: 3 brks: C | 2L | 3/m² | 14.29% |
| 61 | ROS SUF | Rosa 'Suffolk' | Cutting: Bush: 3 brks: C | 2L | 3/m² | 14.26% |
| 62 | SAL LAN | Salix lanata | Branched: 2 brks: C | 2L | 3/m² | 14.29% |
| 62 | SAR HUM | Sarcococca humilis | Bushy: 6 brks: C | 3L | 3/m² | 14.29% |
| Total :433 | | | | | | |

Native Edge Mix

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 141 | COR SAN | Cornus sanguinea | Branched: 4 brks: C | 3L | 1/m² | 25% |
| 141 | COR AVE | Corylus avellana | Branched: 3 brks: C | 3L | 1/m² | 25% |
| 141 | LIG VUL | Ligustrum vulgare | Branched: 3 brks: C | 2L | 1/m² | 25% |
| 141 | VIB OPU | Viburnum opulus | Branched: 4 brks: C | 3L | 1/m² | 25% |
| Total :564 | | | | | | |

Shaded Mix A

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 14 | ASP SCO | Asplenium scolopendrium | Full Pot: C | 3L | 5/m² | 33.33% |
| 14 | CAR DIV | Carex divulsa | Full Pot: C | 2L | 5/m² | 33.33% |
| 14 | HOS ELE | Hosta sieboldiana elegans | Full Pot: 2 Buds: C | 3L | 5/m² | 33.34% |
| Total :42 | | | | | | |

Shaded Mix B

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 41 | BLE SPI | Blechnum spicant | Full Pot: C | 3L | 5/m² | 33.33% |
| 41 | CAR DIV | Carex divulsa | Full Pot: C | 2L | 5/m² | 33.33% |
| 41 | HEL ORI | Helleborus orientalis | Full Pot: C | 3L | 5/m² | 33.34% |
| Total :123 | | | | | | |

Sun Mix

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 32 | ECH PUR | Echinacea purpurea | Full Pot: C | 3L | 5/m² | 33.33% |
| 32 | POL VUL | Polypodium vulgare | Full Pot: C | 3L | 5/m² | 33.33% |
| 32 | STI TEN | Stipa tenuissima | Full Pot: C | 3L | 5/m² | 33.34% |
| Total :96 | | | | | | |

Wildflower Plugs

| Number | Abbreviation | Species | Specification | Pot Size | Density | Percentage Contribution |
|---|---|---|---|---|---|---|
| 43 | CEN CYA | Centaurea cyanus | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | CEN NIG | Centaurea nigra | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | GAL ALB | Galium album | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | LEU VUL | Leucanthemum vulgare | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | LYT ROB | Lythrum salicaria 'Robert' | Full Pot: C | 0.5L | 5/m² | 12.5% |
| 43 | POT SAN | Poterium sanguisorba sanguisorba | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | RUM ACE | Rumex acetosa | Plug: C | 50cc min. | 5/m² | 12.5% |
| 43 | SIL LAT | Silene latifolia | Plug: C | 50cc min. | 5/m² | 12.5% |
| Total :344 | | | | | | |

Dogwood Willow Mix

| Number | Abbreviation | Species | Specification | Density | Percentage Contribution |
|---|---|---|---|---|---|
| 8 | COR SIB | Cornus alba 'Sibirica' | Branched: 3 brks: C | 3/m² | 25% |
| 8 | COR FIR | Cornus sanguinea 'Midwinter Fire' | Branched: 3 brks: C | 3/m² | 25% |
| 8 | SAL LAN | Salix lanata | Branched: 2 brks: C | 3/m² | 25% |
| 8 | VIB COM | Viburnum opulus 'Compactum' | Bushy: 4 brks: C | 3/m² | 25% |
| Total :32 | | | | | |

Notes:
For Shaded Mix A, Shaded Mix B and Sun Mix, individual varieties are to be planted in groups of approximately 3-5.

Planting schedules on this sheet are applicable for drawing numbers:
12335-LUC-XX-00-DR-L-0400-S2
12335-LUC-XX-00-DR-L-0401-S2
12335-LUC-XX-00-DR-L-0402-S2
12335-LUC-XX-00-DR-L-0403-S2
12335-LUC-XX-00-DR-L-0404-S2

**LEGEND**

**Soft landscape**

- Existing Trees — To be retained
- Existing Trees — To be removed
- Proposed Trees — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Hedge Planting — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Native Shrub / Scrub Planting — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Amenity Grass — EG22 Strong Lawn Grass Mixture, supplied by Emorogate Seeds, to amenity areas. Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Reinforced Amenity Grass — EG22 Strong Lawn Grass Mixture, supplied by Emorogate Seeds, to amenity areas. Refer to Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Species Rich Grass — EM3 Special General Purpose Meadow Mixture, supplied by Emorogate Seeds. Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Ornamental planting — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Rain garden planting — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Ornamental feature grasses — Refer to 12355-LUC-XX-00-DR-L-0400 for planting schedule
- Green roof to bin / bike stores — Biodiverse mix of native wildflowers and grasses

| Rev | Date | Description | Drn | Chk | App |
|---|---|---|---|---|---|
| P06 | 15.08.24 | Updated issue for team | KT | CO | CO |
| P05 | 13.08.24 | Updated issue for team | KT | CO | CO |
| P04 | 27.03.24 | Tree added in front of Block 6 | KT | KT | CO |
| P03 | 27.03.24 | Red line boundary updated. Updates to Block 6 frontage | KT | KT | CO |
| P02 | 06.03.24 | Updated in line with Hard Landscape Plan | TJa | KT | CO |
| P01 | 27.02.24 | Planning issue | TJa | KT | CO |

Scale 1:200
0 2 4 6 8 10m

Do not scale from this drawing
All dimensions are to be verified on site
© Drawing & design copyright LUC

LUC
www.landuse.co.uk

Project
Victoria Point

Client
Empiric Limited

| LUC Job Nr | Scale @A2 | Status |
|---|---|---|
| 12355 | 1:200 | S2 |

Drawing Title
Planting Plan (1 of 5)

| Drawing Nr | Rev |
|---|---|
| 12355-LUC-XX-00-DR-L-0400 | P06 |