REVISION	DATE	DESCRIPTION
A	17/01/24	UPDATED TO PLANNING COMMENTS

PROPOSED ELEVATION B
1:100 @ A3

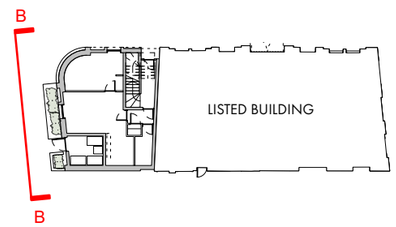

KEY SITE PLAN

MATERIAL NOTES:

01	**BRICK TYPE 01** IBSTOCK, BIRTLEY COMMERCIAL RED FLEMISH BOND. DARK MORTAR. FLUSH JOINTS	
02	**BRICK TYPE 02** IBSTOCK, BIRTLEY COMMERCIAL RED RECESSED 30MM HEADER COURSE. DARK MORTAR. FLUSH JOINTS	
03	**BRICK TYPE 03** IBSTOCK, BIRTLEY COMMERCIAL RED STACK BONDED SOLDIER COURSE. DARK MORTAR. FLUSH JOINTS	
04	**ALUMINIUM CASEMENT WINDOWS** PPC FINISH : RAL 1035	
05	**ALUMINIUM FRAMED CURTAIN WALLING** ESCAPE DOOR PROVIDED AT GROUND FLOOR. ANODISED FINISH: UA 541	
06	**ALUMINIUM EXTERNAL ENTRANCE DOOR** ANODISED FINISH: UA 541	
07	**PRE CAST STONE COPING STONE** WET CAST/ ACID ETCH/ PORTLAND FINISH	
08	**PRE CAST STONE CILLS/STRING COURSE** WET CAST/ ACID ETCH/ PORTLAND FINISH	
09	**BESPOKE TERRACOTTA ROSES** TO FORM PART OF LOAD BEARING CONSTRUCTION	
10	**BRICK PLANTER** RED BRICK FLEMISH BOND. CAPPING PIECE IN BRICK. DARK MORTAR. FLUSH JOINTS	
11	**ALUMINIUM EXTERNAL BIN STORE DOOR** ANODISED FINISH: UA 541	
12	**BRICK TYPE 04** IBSTOCK, BIRTLEY COMMERCIAL RED FLEMISH BOND WITH HEADER BRICK OMITED.	

OMIArchitects

31 Blackfriars Road, Salford, Manchester, M3 7AQ
+44(0)161 832 3242 / info@omiarchitects.com / www.omiarchitects.com

PROJECT	LAYSTALL STREET – LISTED BUILDING EXTENSION					
DRAWING	PROPOSED ELEVATION PIGEON STREET					
DATE	AUG 23	DRAWN BY	DS	SCALE	1:100	@A3
JOB NO.	1383	DWG.NO.	L0361			