

Assured CMS Ltd Laystall Street Manchester . Framework Construction Environment Management Plan.



Author

Chris Metcalfe MAPM FIIRSM

Assured CMS Ltd

Table of Contents

INTRODUCTION.....	4
PROPOSED DEVELOPMENT	4
CEMP OBJECTIVES	5
PRINCIPAL CONTRACTOR	5
CEMP STRUCTURE	5
2. CONTEXT, CONSIDERATIONS & CHALLENGES	6
GENERAL.....	6
SITE LOCATION.....	6
LOCAL HIGHWAY NETWORK	7
PUBLIC TRANSPORT ACCESSIBILITY & SERVICES	7
PEDESTRIAN & CYCLING FACILITIES	7
PARKING	7
COMMUNITY CONSIDERATIONS	8
3. CONSTRUCTION PROGRAMME & METHODOLOGY.....	8
GENERAL.....	8
CONSTRUCTION STAGES & PROGRAMME	8
WORKING HOURS	9
SITE OFFICE & WELFARE FACILITIES	9
SITE SET UP & PREPARATION	9
4. VEHICLE ROUTING & SITE ACCESS	9
CONSTRUCTION VEHICLE ROUTING	9
ROUTE COMPLIANCE.....	10
SITE LOGISTICS	10
5. ESTIMATED VEHICLE MOVEMENTS	13
CONSTRUCTION VEHICLES.....	13
6. STRATEGIES TO REDUCE IMPACTS.....	13
MEASURES CHECKLIST AND PLANNED MEASURES	14
CONSTRUCTION SITE MANAGER(S)	15
SAFETY & ENVIRONMENTAL STANDARDS	15
SAFETY & CONTROL OF SUBSTANCES HAZARDOUS TO HEALTH (COSHH).....	16

DELIVERY SCHEDULING & VEHICLE MOVEMENTS.....	16
VEHICLE DWELL TIMES	16
SUBCONTRACTORS	17
GOOD NEIGHBOURS POLICY	17
PEDESTRIAN & CYCLIST SAFETY MEASURES	18
NOISE & VIBRATION CONTROL.....	18
AIR POLLUTION, DUST & DIRT CONTROL	19
CONSOLIDATION.....	19
FUEL CONSUMPTION / EMISSIONS	20
WASTE MANAGEMENT.....	20
FIRE PRECAUTIONS	21
CONSTRUCTION PERSONNEL & TRAVEL PATTERNS	21
7. IMPLEMENTING, MONITORING & UPADTING	21
CEMP IMPLEMENTATION	22
DATA COLLECTION.....	22
CONTRACTORS' INFORMATION	22
COMPLAINTS PROCEDURE	22
APPENDIX 1 PROGRAMME TBA.....	23
APPENDIX 2 SITE SETUP	24
APPENDIX 3 SITE LOCATION	25
APPENDIX 4 PROPOSED TRAFFIC ROUTE	26
APPENDIX 5 LOGISTIC PLAN	27
APPENDIX 5 CODE OF CONSTRUCTION PRACTICE.....	28
INTRODUCTION	28
APPLICABLE ACTS OF PARLIAMENT/REGULATIONS	28
GENERAL REQUIREMENTS	28
NOISE AND HOURS OF WORKING	30
AIR POLLUTION.....	31
PROTECTION OF SURFACE AND GROUNDWATER RESOURCES.....	32
HANDLING AND DISPOSAL OF CONTAMINATED MATERIALS AND OTHER WASTES.....	33
TREES AND VEGETATION	34
SITE BOUNDARIES/HOARDINGS/TEMPORARY STRUCTURES ON THE PUBLIC HIGHWAY	35
SITE ACTIVITIES	36
LIAISON AND AWARENESS	37
RELEVANT BS STANDARDS AND GUIDELINES	37

APPROVAL			
Version	Name	Date	Modifications
1	Chris Metcalfe FIIRSM MAPM	26/10/2022	Draft for review
2	Chris Metcalfe FIIRSM MAPM	12/11/2022	Ammendents following comments from Sarah Hall. Deloitte
3	Chris Metcalfe FIIRSM MAPM	23/11/2022	Revised red line boundry in Appendix 3
4	Chris Metcalfe FIIRSM MAPM	23/01/2023	Revised working hours as per EHO comments
5	Chris Metcalfe FIIRSM MAPM	22/03/2023	Logistic startgery Page 10 & Plan added to Appedix 5
6	Chris Metcalfe FIIRSM MAPM	22/03/2023	Revised traffic route

Introduction

General

ASSURED-CMS Ltd has been commissioned by Great Ancoates Ltd (the Client) to provide construction management consultancy services in support of a planning application for the redevelopment of Land adjoining Laystall Street, Manchester, M1 2JP

The Local Planning Authority is Planning, Manchester City Council, PO Box 532, Town Hall, Manchester M60 2LA or email planning@manchester.gov.uk

Proposed Development

The development proposals incorporate land remediation of brown field site and construction of a phased, mixed-use development comprising 154 bed room hotel, erection of 20 storey hotel building with ancillary internal facilities such as cafe/bar etc as well as landscaping works, Please see Deloitte standard description of development for proposals

CEMP Objectives

The aim of this Construction Environmental Management Plan (CEMP) is to set out the principles of construction of the Proposed Development. It has been prepared to allow Manchester City Council to assess the impact and suitability of construction of the Proposed Development from a transport and highways perspective. The objectives of this CEMP are to:

- Set out the principles of construction of the Proposed Development.
- Ensure that all construction works at the Site are organised and delivered in a manner that minimises impact on Laystall Street and the local highway network, community considerations detailed in **Section 2**, pedestrians, cyclists, local residents and local businesses; and
- Ensure that safety is maintained throughout construction, both on-site and for other users in the vicinity, including pedestrians and cyclists on Laystall St and Lomax St.

The CEMP aims to ensure that all construction works at the Site are organised and delivered in a manner that minimises impact on the local highway network, pedestrians and local businesses and residents, ensuring safety is maintained.

It sets out the proposed construction vehicle routing strategy, indicative details concerning the type of construction vehicles required to serve the Site daily, and operating procedures to be employed at the Site to help mitigate the impact of development on the local highway network. Clear routes and procedures are outlined that will be adhered to at all times as a means of limiting the effect of construction. It addresses the practical considerations of construction, including the proposed construction methodology and anticipated timescales, and more importantly assesses the impact of construction on the local community considering issues such as traffic congestion, air quality impacts associated with dust and vehicle emissions, noise, hours of operation and site security.

Principal Contractor

Assured-CMS Ltd as Principal Contractor have been appointed Principal contractor as such, this Framework CEMP has been produced for submission as part of the planning application, to provide MCC with an overview of the expected logistics activity during the construction programme.

CEMP Structure

Following this introductory section, the remainder of this CEMP is structured as follows:

- **Section 2: Context, Considerations & Challenges** – Sets out information concerning transport conditions prevailing at the Site and in the immediate surrounding area, and identifies community considerations.

- **Section 3: Construction Programme & Logistics** – Sets out details concerning the logistics of construction, including the anticipated construction programme, methodology, and site set up information.
- **Section 4: Vehicle Routing & Site Access** – Details the proposed vehicle access and routing strategy for the duration of the construction programme.
- **Section 5: Estimated Vehicle Movements** – Provides an overview of estimated vehicle movements and sizes for the construction programme.
- **Section 6: Strategies to Reduce Impacts** – Sets out the mitigation measures that will be employed during construction to minimise impact on local residents, businesses, the surrounding highway network, and all road users, including pedestrians and cyclists.
- **Section 7: Implementing, Monitoring & Updating** – Outlines the monitoring strategy for the CEMP.

2. Context, Considerations & Challenges

General

This section describes the existing transport conditions in the area surrounding the Site, and is informed by desk-based research undertaken by Assured-CMS Ltd. Transport baseline conditions are identified so that the context of construction of the Proposed Development and its potential impact on the local highway and transport network can be fully understood.

A Human Impact Management Plan and Risk assessment will be produced if required by MCC under a separate condition

Site Location

The Site is located on Great Ancoats Street Manchester, bound by Laystall Street to the north, Great Ancoats Street to east and Lomax Street to the south,. The site is located on the corner of Laystall St and Great Ancoats Street, Manchester. The site is a vacant plot of land currently being used as a compound the abuts an existing Serviced Apartments which is being redeveloped into a Apart-

The site is approximately 5 metres to the West of Great Ancoats St (A665), to the south of Urban Exchange, a retail area, with a light industrial area to the south. The A665 is a busy main road, with road traffic determining the noise climate.

There is an indicative site location plan showing the location of the Site in the context of the surrounding area shown in **Appendix 3**

Local Highway Network

Laystall St

Laystall St runs to the North of the Site and is adopted by MCC as the Local Highway Authority. It connects to Great Ancote St at its Northern end and Brock St / Pigeon St at its Southern end.

Lomax St

Lomax St is located to the South of the Site and is also adopted by MCC as the Local Highway Authority and is subject to a 30mph speed restriction. It connects to Laystall at its southern end and Great Ancote St at its northern end. Lomax St provides access to the Northern Quarters serviced apartment's which forms part of the Site boundary's.

Great Ancote St (A665)

Great Ancote St is located to the north of the Site and is also adopted by MCC. The A665 is a strategic route that runs through Manchester, the majority is two lanes of traffic with traffic light controls at junctions.

Public Transport Accessibility & Services

Bus Services

The Site is currently served by a total of 22 daytime bus services. An accessible bus service is defined as being reached within a maximum walk distance of 640m (an eight minute walk at 4.8kph). The closest bus stop to the Site is located on Great Ancoats St (Opposite Laystall St) and approximately 150m to the east of the centre of the Site.

National Rail Services

The Site is located approximately 0.4 miles to the east of Manchester Piccadilly Rail station. The station is served by Cross Country Railway services running to destinations in Birmingham to Manchester, Bristol to Manchester, Stoke-on-Trent to Manchester and Oxford to Manchester.

Pedestrian & Cycling Facilities

The area in the vicinity of the Site has good pedestrian facilities with footways providing access to a wide range of facilities within the town centre. The majority of the City centre including retail, leisure, employment, health and education facilities, alongside Piccadilly station and local bus stops are located within a 10 minute walk of the Site,

The Site is located in close proximity to a number of cycle routes. In the vicinity of the Site, marked cycle routes are provided on Great Ancoats St and through the town centre.

Parking

Streets in the vicinity of the Site, including Laystall St and Lomax St are located within the Controlled Parking Zone (CPZ) Manchester Areas with parking restrictions controlled via double yellow lines.

There are several on-street Pay & Display / Voucher parking bays in the vicinity of the Site, including a MCCP car park on 61 Ducie St

Community Considerations

The impacts of construction projects and construction-related traffic are a key concern, particularly at a local level. The Client recognises the importance of communication between the Site and local residents and businesses.

A review has been undertaken of local amenities, facilities, and sensitive receptors in the vicinity of the Site that may be particularly impacted by construction of the Proposed

Development, allowing the resultant logistics strategy to be developed in a way that minimises impact. These include:

There is an Apart-Hotel to the west of the Site on Laystall st and surrounding properties; The logistics strategy set out within this CEMP has been developed taking into consideration visitors and guests in the vicinity of the Site, including sensitive receptors and key pedestrian and cycle routes, with the objective of minimising impact.

3. CONSTRUCTION PROGRAMME & METHODOLOGY

General

Local transport and traffic impacts are primary issues and concerns for all construction projects. As such, managing the potential transport impacts of construction is a key priority. Potential impacts of construction include on-street congestion resulting in traffic delays, increased road hazards, noise associated with vehicles and construction works, and air quality impacts related to vehicle emissions and dust generation.

The following sections provide an overview of the logistics of construction Laystall St. Details are set out concerning the anticipated construction programme and timescales, construction vehicle access routes, the location for access and egress to the Site, and anticipated construction vehicle sizes and frequencies.

Construction Stages & Programme

It is anticipated that, construction works will commence in May 2023 and complete in January 2025. As with the majority of construction projects, it is noted that there may be periods of overlap between elements of construction contained within the programme

A preliminary project programme and construction logistics plans have been prepared by Assured - CMS Ltd and are contained at [Appendix 1](#) for information. A detailed project programme will be prepared and contained within the Final CEMP.

It is noted that, whilst the duration of the construction programme (number of weeks per construction stage) is not anticipated to significantly change, the start date and month is subject to change depending on timescales for approvals.

Working Hours

All construction works will be carried out between the hours of 07:30 and 18:00, Monday to Friday, and between the hours of 08:30 and 14:00 on Saturdays. No construction works will be undertaken at the Site on Sundays or bank holidays..

Any noisy works required on-site will not commence until 09:00, Monday to Friday, with such works not permitted to be undertaken on Saturdays. For any noisy works where there is a direct impact upon surrounding properties within the specified times, the Site Manager(s) will make contact with the neighbours to consult on the duration, extent and

impact of the works to see if an informal agreement can be reached to minimise the impact of these works.

Site Office & Welfare Facilities

Welfare facilities for construction personnel will be provided within the Site boundary during all stages of construction. Such facilities will be secured to ensure they are not accessible by the general public. A green accommodation policy will be implemented for site cabins and welfare facilities.

Site Set Up & Preparation

Site setup will be crucial to mitigating the impact of construction on surrounding residents, businesses and road users.

Throughout the construction programme the frontage of the Site will be kept tidy and presentable. Hoarding will be erected up to a height of 2.44m along the length of the Site frontage on Laystall Street, Lomax Street and Great Ancoats St throughout construction, as identified in the logistics plans contained at **Appendix 2**. The purpose of such hoarding is to provide security and prevent unauthorised personnel from accessing the Site. Hoarding also provides suitable segregation between pedestrians and construction works being undertaken.

Access for construction personnel will be provided via a controlled entry point, anticipated to be managed via a biometrically operated turnstile.

4. VEHICLE ROUTING & SITE ACCESS

Construction Vehicle Routing

The proposed vehicle routing strategy to be employed for the duration of the construction programme is shown in **Appendix 4**. The routing strategy has been developed taking into consideration highway routes in the vicinity of the Site, sensitive receptors, community considerations identified in **Section 2** and key pedestrian and cycle routes.

It is proposed that construction vehicles will travel to the Site via the A 665 (Great Ancoats St) and the strategic highway network.

The proposed routing strategy ensures that, as far as reasonably practicable, construction vehicles travel to and from the Site on strategic routes that are suitable for use by construction vehicles, avoids vehicles reversing or turning directly outside the Site and minimising travelling on

local roads of a residential nature that are subject to low vehicles speeds and potential high pedestrian footfall.

Where possible, the Contractor will source local construction material suppliers and labour as a means of minimising journey lengths.

Route Compliance

During the construction programme, all traffic associated with the Site will be advised of the appropriate transport routes that should be used, with all regular visitors provided with written notification of the agreed access and routing strategy.

A requirement to use the agreed construction vehicle route as set out in **Appendix 4** will be included as a contractual requirement of all sub-contractors travelling to and from the Site. It is envisaged that this information will be communicated in the form of a leaflet or email and will include information with regard to times of operation, delivery routes, the call up procedure and delivery slot information. Any repeated non-compliance with the construction routing strategy could result in disciplinary procedures or the termination of the contract of workers and/or suppliers.

All construction workers and suppliers will be advised to use the www.routeplanner.co.uk website, which is designed to help freight operators plan a route for a specified size of vehicle, and identify where it is possible to stop or wait legally.

An appointed Site Manager will keep up-to-date with regards to scheduled roadworks, events and incidents in the area. Where feasible, any required changes to the routing strategy due to significant roadworks or events taking place on the proposed construction vehicle route will be agreed with MCC in advance.

Site Logistics

Loading locations, laydown areas welfare facilities, tower crane position and mast climbers are identified on the logistics plan contained at **Appendix 5**.

The logistics and access strategy has been developed with consideration given to access, egress and material unloading points. Specific pull-in zones for off-loading will be provided within on-site throughout the construction programme.

During working hours, the vehicular access and egress gates on Laystall St will be manned by trained traffic marshals who will be responsible for ensuring that only authorised vehicles and construction personnel are provided with access to the Site. All vehicles will be checked by the traffic marshal at the main vehicular access point prior to being allowed to proceed to the designated on-site unloading area. On exiting, the traffic marshal will guide vehicles onto the highway safely and will record their departure.

Due to the nature of the site, we have endeavoured to research a traffic and Logistics route that provides as little disruption as practicable to the projects neighbouring residents and businesses. Given the traffic management constraints associated with Laystall Street being a one-way system we would propose the following measures to minimise disruption.

All site traffic will approach the site delivery loading and hoarding area by suspending parking and a lane at the junction on Laystall St with Great Ancoats Street. Vehicles will approach from Great Ancoats St, turning onto Newton St then onto Hilton St then on to Tariff St finally onto Laystall St. Traffic Marshalls from the Assured-CMS team will then guide the site traffic into the relevant loading / unloading area.

Site traffic emerging from the site, will do so under the supervision of Assured-CMS Traffic Marshalls, before re-joining Great Ancoats St obeying the traffic signals at the junction. Further to this strategy and to further mitigate our impact upon the area our team will carry out the following:

- Assured-CMS Traffic Marshalls to guide Site Traffic to and from site entrance.
- Construction Logistics Manager to coordinate deliveries to avoid peak traffic times & Coordinate deliveries between subcontractors and suppliers to avoid increased traffic.
- Deliveries based on Just in Time requirements.
- Off-loading and on-loading of materials & plant to be undertaken within the site boundary in unless agreed otherwise with the local authority.
- Ensure site entrance and surrounding areas are clean and debris free.
- Site boundaries fully secured with solid hoarding in a neutral colour.
- Site boundaries kept clean with professional appearance.
- For the erecting of the tower crane a temporary half road closure will be applied for on Laystall St

In terms of Parking, we acknowledge that the site is constrained in providing the required number of car parking spaces required for the site work force. Off-site parking for constructions teams will be utilised. We have noted a number in the general vicinity of the site that staff, Visitors, and sub-contractors will be directed to, such as MCCP Car Parking at Lomax St & Pidgeon Street. Details will be communicated to all construction operatives and Visitors before arriving to site and reinforced again during their site inductions. The use of public transport will also be strongly encouraged as the site is located near to Manchester Piccadilly Station a major transportation hub.

Delivery scheduling

A site-based delivery management system will be used to control the volume of deliveries to site.

Sub-contractors and hauliers must be booked in a minimum of 48-hours in advance to allow the request to be reviewed and subsequently approved/declined by the site-based Construction Project Manager.

Re-timing for out of peak deliveries

Re-timing out of peak time will aid the operational efficiency of the construction site and the neighbouring area. We, Assured-CMS, as contractor, commit to attempting to re-time as many deliveries as possible out of the morning peak (07.00-10.30). Deliveries will be arranged as standard between the hours of 10.30-12.30 and 14.00-16.00 to avoid peak travel periods given the proximity of the loading bay on Laystall St .

Design for Manufacture and Assembly and off-site manufacture

Reducing delivery numbers and effective delivery management is a core value of this project. We have identified many new elements that can be manufactured off-site reducing the number of deliveries associated with manufacturing onsite, namely reduction in plant and material deliveries. Items to be manufactured off-site will include:

- Door-Sets.
- Reception Desk.
- Landscape Planters.
- Stair Balustrades.
- Stair Handrails.
- Integrated Panel Systems.
- Masonry Support.
- Louvres.
- Electrical Switch Gear.
- Air Handling Units.
- Pipe-work Manifolds.
- Smart procurement

Assured-CMS will source materials from local suppliers to contribute to the local economy. We will also explore opportunities to source materials from the same supplier(s) as other developers with sites underway near this site.

There will be no on-site parking provided for construction worker's vehicles. Restrictions are also in place at present to prevent on-street parking. As there are excellent transport links nearby at Manchester Piccadilly Station, together with available bus routes, travel by public transport will be strongly encouraged.

Additional banksmen will be present throughout construction hours to ensure pedestrian safety and the safe arrival and departure of vehicles, and to minimise conflict with pedestrians, cyclists and other road users.

It is noted that some construction activities may require continuous access for a number for delivery and construction vehicles, for example concrete pours. This may impact upon working times and incorporate a requirement for vehicles to wait in the vicinity of the Site.

All materials and plant associated with the construction process will be stored within the footprint of the building.

The Principal Contractor and/or Site Manager(s) will apply for any suspension in advance, giving the required notice period to MCC, and will pay any associated fees. The Site Manager(s) will consult with MCC officers regarding the timescales for suspension. The Site Manager(s) will also inform neighbouring properties and businesses of the proposed loading arrangements and suspensions prior to commencement.

5. ESTIMATED VEHICLE MOVEMENTS

Construction Vehicles

It is noted that construction vehicle frequencies are likely to vary between different periods of construction, with a range of vehicles anticipated to require access to the Site during the construction programme. Vehicles requiring access to the Site are anticipated to include excavators, crushers, fork lift trucks, tipper lorries, flatbed articulated lorries, rigid lorries (various sizes), concrete lorries, tower cranes, and passenger hoists. It is anticipated that a large proportion of construction vehicles accessing the Site will be less than 10m in length.

The location and type of cranes required will be detailed in a site specific crane lift plan, as Manchester airport boundry is more than 6KM from the site its not inviged any heght restctictions will be applaicable howere this will be confirmed by the crane operators

A breakdown of forecast weekly construction vehicle movements, split by construction stage, has been developed by Assured – CMS Ltd Ltd and is summarised in **Table 2**.

Across the whole construction programme, an average of 65 construction vehicle movements per week are anticipated; this equates to 13 per day. At peak periods, this rises to approximately 36 vehicles per day.

Table 2

Stage	Construction Vehicles (weekly)	
	Average	Peak
Stage 1	85	180
Stage 2	112	144
Stage 3	89	106
Stage 4	63	80

The weekly vehicle profile set out in **Table 2** is intended to provide MCC with a suitable level of detail to assess the potential impact that vehicular activity associated with construction of the Proposed Development may have on the local and strategic highway network

6. STRATEGIES TO REDUCE IMPACTS

This section of the CEMP sets out the mitigation measures that will be employed to minimise the impact of construction of the Proposed Development on local residents, businesses, the highway network in the vicinity of the Site and all road users, including pedestrians and cyclists.

This section ensures that the CEMP is effective in achieving aims of reducing road risk, environmental impact, cost and congestion.

Measures Checklist and Planned Measures

A planned measures checklist is detailed in [Table 3](#), with measures identified as committed, planned or considered. Further information on relevant measures is provided within this section of the CEMP.

Table 3 Planned Measures Checklist

Measure	Committed	Proposed	Considered
Safety & Environmental Standards / Programmes	X		
Adherence to Designated Routes	X		
Delivery Scheduling	X		
Re-Timing of Deliveries (Out of Hours/ Peaks)	X		
Use of Holding Areas		X	
Use of Consolidation Centres		X	
Freight by Water / Rail			X
Off-Site Manufacture			X
Re-use of Materials on-site		X	
Smart Procurement		X	
Collaboration with other Developemtns	X		
Staff Travel Plan	X		

Construction Site Manager(s)

It is proposed that a designated Site Manager(s) will be appointed for the duration of the construction period to deal with any enquiries, comments and complaints from local residents, the general public and any other parties. Contact details for the Site Manager(s) (including a 24 hour phone number) will be provided to MCC prior to construction works commencing.

Contact details of the Site Manager(s) will also be displayed outside the Site on hoarding and will be provided to adjacent residents, ensuring that any questions or queries raised concerning construction are appropriately dealt with in a timely manner.

The Site Manager(s) will be responsible for undertaking the transport co-ordination role or the duration of construction. Their main responsibilities are anticipated to include, but not be limited to:

- Managing the implementation of the CEMP;
- Construction and delivery vehicle scheduling and booking;
- Informing local residents, businesses, MCC about the commencement of construction works and anticipated construction programme;
- Checking for scheduled road works, special events and incidents on the [One Network Roadworks](#) website;
- Handling any complaints and responding to questions or concerns from MCC ,local residents, businesses and the general public; and
- Acting as a point of contact for employees, contractors, MCC and the general public.

The Site Manager(s) will ensure that there is adequate liaison between key stakeholders throughout the construction period, including the Principal Contractor, any appointed subcontractors, local residents, businesses, MCC, and other local parties.

Regular review meetings and telecommunication will be held between the Site Manager(s) and MCC, if required. It is envisaged that update meetings will be held on an ad-hoc basis, with updates provided to MCC via email or telephone at agreed intervals.

Safety & Environmental Standards

The Principal Contractor will implement a number of environmental initiatives for construction of the Proposed Development, including an Environmental Risk Assessment, Environmental Management Plan, Environmental Aspects & Impacts and Materials Management Plan.

A range of Environmental Key Performance Indicators (KPIs) will be introduced for construction, including:

- Diversion of waste from landfill;
- Setting and monitoring of energy, water, and carbon usage targets from on-site activities;
- Use of waste recycling schemes on-site, as far as possible;

Safety & Control of Substances Hazardous to Health (COSHH)

All personnel will be required to wear safety helmets whilst on-site, and safety instructions will be strictly adhered to. All precautions will be taken to ensure the safety of working personnel, visitors and the general public.

All relevant COSHH regulations will also be enforced, and manual handling regulation will also be implemented. Plant operatives will be made fully aware of all potential hazards, including but limited to uneven ground and other construction personnel nearby.

Delivery Scheduling & Vehicle Movements

The Site will operate a delivery booking schedule to control deliveries to ensure, as far as reasonably practicable, that there are no construction vehicles held waiting in the vicinity of the Site, and to ensure the number of deliveries taking place at a time can be accommodated within the on-site loading areas. Such a booking system will enable vehicle movements to be distributed across the week and across working hours. The booking schedule will be strictly enforced and managed by the Site Manager(s).

It is anticipated that all deliveries to the Site will be organised to take place between the hours of 09:30 and 15:00, Monday to Friday, and 09:30 to 13:00 on Saturdays. No deliveries or collections would be permitted on Sundays.

Final delivery hours will be agreed in advance with MCC.

Deliveries will not be accepted outside of their designated timeslot, unless there is capacity to accommodate vehicles within the proposed loading area. Unplanned vehicles will be turned away and advised to return to the Site at a rearranged delivery time, and will not be permitted to wait at any other location on the highway network in the vicinity of the Site.

The Client and Principal Contractor will consider potential methods to reduce the number of vehicle movements to the Site, including investigating the potential for consolidation of deliveries. When planning deliveries, the Contractor will consider the following:

- All deliveries to the Site will be restricted to the timings set out within this CEMP; Deliveries will be permitted only in the specified loading area;
- A delivery booking schedule will be employed to avoid vehicles queuing or waiting on the highway network in the vicinity of the Site; and
- Material storage areas will be prepared on-site in advance of deliveries to minimise loading and unloading times.
- All plant and machinery used in the construction of the development will be contained within the site boundary at all times.

With proper planning and an efficient delivery schedule, unnecessary vehicle trips to the Site will be kept to a minimum.

Vehicle Dwell Times

Construction delivery vehicles are not anticipated to be required on-site for a period longer than 60 minutes, depending on materials being delivered or collected. The delivery booking system

will allow sufficient times between deliveries to ensure that no vehicles arrive or depart at the same time, to minimise potential disruption to traffic flow on the surrounding local highway network.

Subcontractors

Individual subcontractors will be required to incorporate the relevant requirements from the Final CEMP into their activities as well as statutory requirements. Any potential subcontractors will be required to demonstrate the ways in which they will comply with the contents of the CEMP.

Good Neighbours Policy

The Client recognises the importance of communication between the Site and local residents and businesses. The Client and Principal Contractor will strive to be '*Good Neighbours*' throughout and prior to construction, and as such will employ systems to ensure that any local issues and concerns are understood.

A Community Liaison Manager (CLM) will be appointed for the duration of construction of the Proposed Development. In line with best practice guidance, the CLM will undertake letter drops to neighbours in the vicinity of the Site (including Apart-Hotel guests & visitors, businesses) to ensure all parties are kept informed on construction activities. This will provide information concerning construction, including timescales, working hours and delivery scheduling, alongside contact details for the Site Manager(s). This will help to minimise the impact construction may have on the surrounding community and ensure that residents and businesses are fully informed at all times.

A regular newsletter will be produced, and will include contact details for both the Site Manager(s) and CLM. Neighbours will be encouraged to report back any comments or concerns to the CLM or Site Manager(s). The CLM will be responsible for meeting with any concerned party regarding construction works and potential impacts.

The Principal Contractor will be signed up to and approved by the Considerate Constructor Scheme (CCS), and will be compliant with all associated elements.

An induction programme specific to Laystall St will be provided to all construction personnel before works commence. This will incorporate health and safety; on-site construction works and issues and sensitivities in the context of the surrounding area and local community. Operatives will be advised on how to behave on-site and whilst interacting with the local area, businesses and residents.

As with all construction projects, there is potential for extenuating circumstances to occur that may require work to extend beyond core working hours, for example, the breakdown of plant machinery or other equipment. Such instances are beyond the usual control of the Principal Contractor.

Whilst considered unlikely, should this situation occur, the Principal Contractor would speak to MCC's Environmental Health Officers in order to obtain their guidance on how best to approach out of works working in extenuating circumstances. Where possible, any work that is anticipated to occur outside of the core working hours will be discussed and agreed in advance with MCC.

Pedestrian & Cyclist Safety Measures

Maintaining pedestrian and cyclist safety throughout the construction programme is of great importance. Traffic marshals and banksmen will be present throughout construction hours to ensure pedestrian and cyclist safety and the safe arrival and departure of vehicles, and to minimise conflict and potential disruption for pedestrians, cyclists and other road users.

Warning signage will be provided in the vicinity of the Site to ensure that vehicles, pedestrian and cyclists are aware that construction activity is taking place. The hoarding of the Site will help to ensure that unauthorised access to the Site is not possible.

Retractable fencing will be used by traffic marshals to temporarily close the footway on Lomax St when construction vehicles are entering and exiting the Site. During the temporary footway closures pedestrians will be advised to either wait whilst vehicle manoeuvring takes place or cross and walk on the footway on the opposite side of the carriageway.

Any requirements for road or pavement closures will be via approval by MCC

Noise & Vibration Control

The Contractor will endeavour to keep noise levels to a minimum at all times. Best practicable means, as defined in Section 72 of the Control of Pollution Act 1974, will be employed at all times to reduce and control noise and vibration.

The quietest and lowest impact processes that are reasonably practicable will be employed on-site in the undertaking of all construction works. Measures that will be implemented as a means of minimising noise include:

- The quietest vehicles, tools and machinery shall be used as far as is reasonably practicable;
- Use of sound reduced compressors and sealed acoustic covers for noisy works;
- All pneumatic and percussive tools to have shrouding and/or silencers;
- No machinery will be permitted to start up on-site before the designated core working times;
- Include within material and subcontractor requisitions details of permitted vehicle arrivals (i.e. during designated hours);
- Minimal use of radios and other noise-generating devices on-site;
- Use of ear protection where noise levels exceed 85db(A);
- Keep voices and conversation outside of the perimeter of the Site to a minimum and low in volume;
- No engines left running whilst vehicles are stopped on-site;
- Construction personnel to carefully place waste into muck away trucks and skips, where required, to minimise noise; and dust
- Local residents will be advised of the start and finishing dates and times of particularly noisy works (such as site clearance) and these will be timed to minimise the disruption to local residents as far as possible.

In the event that a complaint or concern is raised by a local resident, business, or MCC, an immediate review will be carried out to establish the degree of noise created and to establish how to best develop a solution.

The Principal Contractor will carry out predictions of noise and vibration levels before construction activities commence. Noise monitoring will be undertaken using a combination of semi-permanent (continuous) and attended monitoring methods at the boundaries of the Site.

Air Pollution, Dust & Dirt Control

control of dust is a prime concern for all construction projects, particularly during periods of dry and windy weather. Best practice set out within the '*Dust and Air Mitigation Measures*' (July 2014) guidance provided by the Institute for Air Quality Management will be employed to control dust generation.

Dust emissions will be monitored visually throughout working hours. If dust is observed either in the air or deposited on vehicles or other sensitive receptors, works will be immediately suspended and working practice reviewed to determine a method to prevent the issue reoccurring.

During construction, it is anticipated that the primary air pollution emissions will be associated with dust generated and fumes generated by machinery. All spoil and waste materials stored temporarily within skips and muck away trucks on-site will be covered at all times.

Mud and debris on the road is regarded as one of the main environmental nuisances and safety problems arising from construction works. All vehicles removing spoil and debris from the Site will be fully sheeted to minimise the risk of any debris over spilling onto the highway. Manual cleaning will be undertaken if required.

If considered appropriate, wheel washing facilities will be provided on-site. The requirement for such facilities will be discussed and agreed with MCC prior to the commencement of any construction works.

The Site Manager(s) will undertake daily inspections of the Site and surrounding roads to ensure that dust control measures are complied with. All complaints regarding dust and air quality pollutant emissions will be recorded and responded to, with the Site Manager(s) maintaining a log of such complaints and any action taken to resolve them.

Consolidation

Consolidation centres are distribution centres at which loads are consolidated and from which a lower number of consolidated loads are delivered to a site. The most common objectives of consolidation centres relate to reducing congestion, traffic disruption and vehicle emissions within the area served by the centre. Such centres are increasingly promoted as a tool to help achieve improvements in local air quality and greater efficiency through optimisation of land use, faster deliveries and in the case of the construction industry reduced material and time wastage.

Objectives of consolidation can include:

- Reduce congestion by decreasing the number of delivery vehicles required;
- Reduce conflicts between delivery vehicles and other road users, including pedestrians;
- Improve the delivery service provided to retailers;
- Reduce costs to retailers, both in terms of transport and staff; and

- Contribute to reductions in traffic pollution / vehicle emissions and improvements in air quality.

Consolidation centres can significantly reduce the volumes of construction traffic generated by up to 70%. However, this benefit needs to be offset against the need to set up parallel logistics facilities at a consolidation centre.

The potential for the use of a construction consolidation centre will be fully investigated by the Principal Contractor.

Fuel Consumption / Emissions

The Contractor will strive to procure local contractors for all elements of construction at the Site, thereby minimising transport costs and impact on the local environment. The use of a booking system for deliveries will also help to ensure that the Site is serviced in an efficient manner, helping to minimise the number of construction vehicle movements generated.

Machinery exhaust emissions will be kept as low as is practicable by using well maintained vehicles and machinery at all times.

No construction-related vehicle engines will be left running when not in use. If a vehicle or piece of equipment is not being used, then it will be turned off to reduce both emissions and on-site noise levels.

Waste Management

Waste will be stored in covered skips or muck away trucks, and will be sorted off-site by an external specialist company. Contractors will be required to minimise waste at source and maximise recycling and re-use of site clearance and construction materials wherever possible and practicable.

All waste material that cannot be reused or recycled, including contaminated soils and materials, will be disposed of in accordance with legislation and best practice. All waste materials will be collected and stored in suitable receptacles before they are taken offsite. Waste materials will not be allowed to accumulate on-site.

If required by MCC, a Site Waste Management Plan (SWMP) will be developed prior to the commencement of construction that addresses how spoil and debris associated with demolition of existing buildings will be removed from the Site. This will be based on guidance within the Department of Trade and Industry (DTi) report *Site Waste Management Plans – Guidance* (2004) and will specify policies and procedures for waste management and disposal.

The Client will follow the ethos of SWMP for construction of the Proposed Development, and will require the Principal Contractor to establish a Materials Management Plan (MMP) in line with the Client's sustainability targets and goals.

Whenever delivery activity is taking place, banksmen will be used to ensure pedestrian safety and to ensure that no dirt or rubbish is left on the highway.

Fire Precautions

A fire marshal will be appointed prior to the commencement of construction. The fire marshal will ensure that a fire escape plan is produced, and the appropriate extinguishers are in place. It is anticipated that the fire marshal will inspect all areas of the Site at least once a day and report and put right any deficiencies.

An assembly point will be designated prior to commencement of each stage of work and will be clearly identified to all construction personnel.

Construction Personnel & Travel Patterns

Construction Personnel Numbers

It is noted that the final number of construction personnel working on-site by stage will depend on the Principal Contractor's final construction methodology. Details of the average and peak number of construction personnel working on-site at any one time will be set out within the Final CEMP.

All contractors and suppliers employed at the Site will be members of the Fleet Operators Recognition Scheme (FORS). As such all contractors and suppliers working on the Site will be committed to safer and more efficient ways of working.

Travel Patterns

It is anticipated that the majority of construction personnel will travel to and from the Site by public transport. As identified in **Section 2**, the Site is located within an accessible distance of the bus services, with Woking National Rail station located approximately 0.4 Miles from the Site. Information on public transport services that operate within an accessible distance of the Site will be provided to all construction personnel at the commencement of their contract.

Due to the sustainable location of the Site in terms of its access to public transport services, no car parking will be provided on-site for construction personnel. Furthermore, on-street parking restrictions limit the opportunity for construction personnel to park on-street in the vicinity of the Site. Construction personnel will be discouraged from parking in Pay & Display bays located in the vicinity of the Site.

The Contractor, where feasible, will seek to recruit construction workers from the local area. This will help maximise the potential for construction workers to travel sustainably to and from the Site. It is considered that, in most instances, construction staff will have the opportunity to arrive at the Site via sustainable modes.

7. Implementing, Monitoring & Upadting

The CEMP will be regularly reviewed and monitored, with feedback provided to MCC where necessary. Further reviews will be discussed with MCC as appropriate.

The CEMP is considered a 'live' document, and as such will be updated throughout the lifespan of construction if any significant changes occur to the scope or programme of construction.

Regular review meetings and telecommunication will be held between the Site Manager(s) and MCC, if required. It is envisaged that update meetings will be held on an ad-hoc basis, with updates provided to MCC via email or telephone at agreed intervals.

CEMP Implementation

The Construction Site Manager(s) will be responsible for implementing the CEMP and will ensure information is provided to all contractors, construction personnel and sub-contractors (as set out in **Section 6**) through a Contractor's Site Induction.

Data Collection

It is anticipated that the following information will be collected during the construction programme:

- Vehicle movements (including arrival and departure time, frequency, dwell time, size);
- Details of complaints and concerns;
- Non-compliance with vehicle routing and loading locations;
- Staff travel patterns; and
- Health & Safety concerns and near-misses / close-calls.

Contractors' Information

The Principal Contractor will prepare a Contractors' information Sheet to distribute information to those undertaking construction works at the Site. This will ensure contractors are aware of the duties and obligations they are required to follow throughout the construction process. It is anticipated that the Handbook will include details of:

- **Vehicle Routing / Delivery Scheduling System:** an explanation of the routing and delivery system in use, and the requirement to utilise these;
- **Driver Training:** Details of any driver training to be provided as part of the contract (if considered applicable); and
- **Construction Specifics:** including site opening times, entry and exit points, vehicle loading locations, anti-idling procedure and road user safety; and
- **Safety & Environmental Standards.**

Complaints Procedure

Although the measures set out within this CEMP are intended to minimise the impacts of construction and ensure that neighbouring residents are informed of the construction programme and timescales, it is possible that complaints may be raised concerning construction.

As previously detailed, contact details and information concerning construction will be provided to local residents and businesses, and the CLM and Site Manager(s) will be available to meet and explore issues with concerned parties directly via appointment. Neighbours will be encouraged to report back any comments or concerns to the CLM or Site Manager(s).

The procedure for logging and recording complaints will be standardised through the use of a proforma complaint record and a complaints log that will be kept on-site for auditing and tracking purposes. This file will also be presented to the Considerate Constructors Scheme Inspectors.


Any complaints received will be taken seriously and addressed immediately by the construction team and designated Site Manager(s). All complaints that are received will be reviewed in regular site meetings to ensure that any required actions are communicated to all employees, as appropriate.

Appendix 1 Programme TBA


Appendix 2 Site Setup

The site is East of Great Ancoats St (A665) site boundry marked in red

The site is East of Great Ancoats St (A665) site boundry marked in red

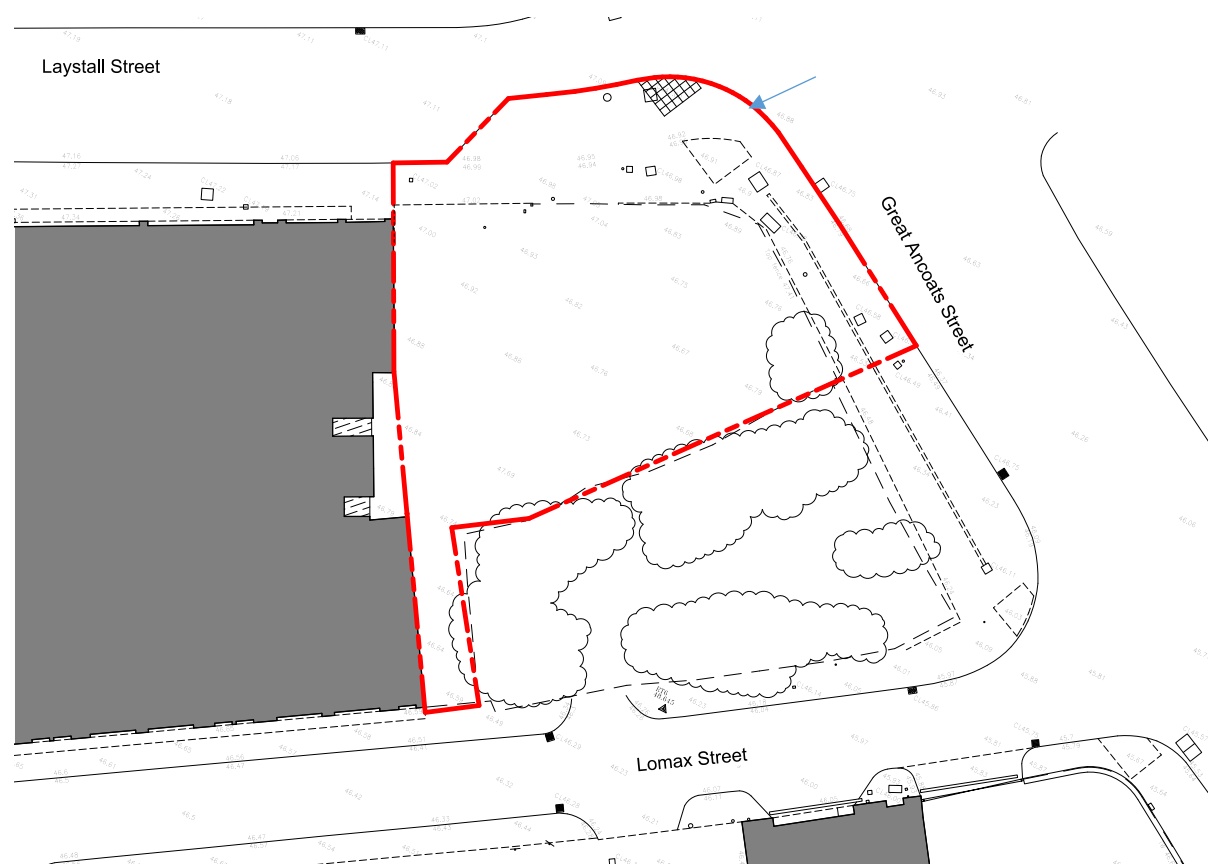

Appendix 4 Proposed Traffic Route

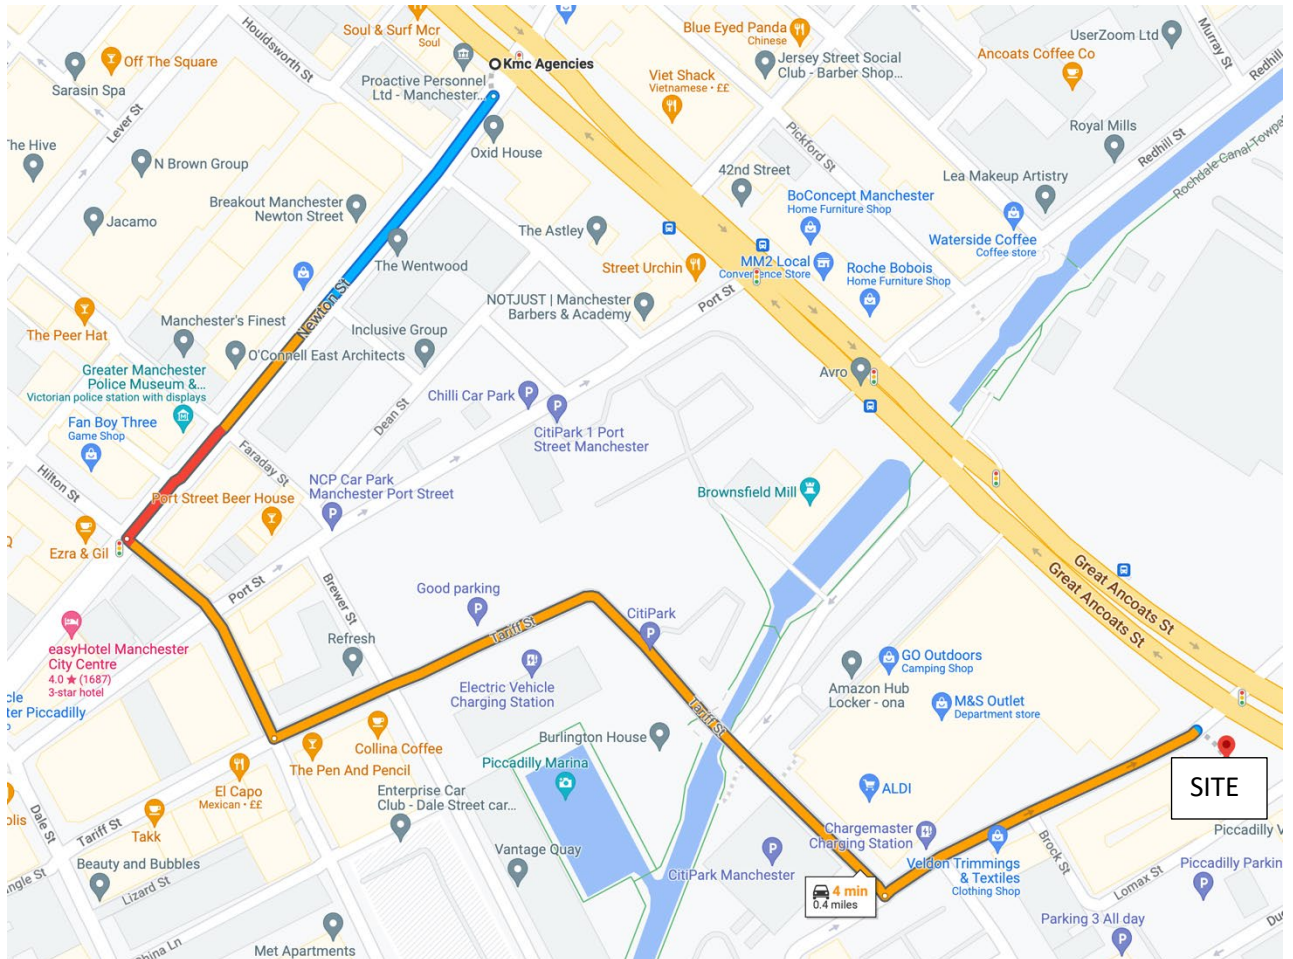

Appendix 5 Logistic Plan

Appendix 5 Code of Construction Practice

Introduction

To be issued to all sub-contractors at point pre-tender stage

The ASSURED-CMS Code of Construction Practice has been developed in liaison with the relevant local authorities and covers specific legislative requirements as well as general requirements and compliance with British Standards referred to in Parts C and D of this Code.

The purpose of the Code of Construction Practice is to cover environmental and safety aspects affecting the interests of local residents, businesses, and the general public in the vicinity of the construction works, and it will apply throughout the whole period of the construction works.

The Code will be included in the Contract for the construction of the new development Sub-Contractors, agents and their employees will have an obligation imposed upon them to comply in full with the terms of the Code of Construction Practice. Otherwise the Contract may be liable to determination. The Code may also form part of the Planning Conditions for the scheme. All sub-Contractors will be given a reasonable period of time to rectify any breaches of the Code of Construction Practice, but should these not be rectified within that time the promoter of the scheme, as the Employer under the Contract, may make arrangements for a third party to carry out the necessary works to rectify the breaches.

Applicable Acts of Parliament/Regulations

There are currently in existence numerous Acts of Parliament and statutory regulations covering environmental and safety matters and rather than list all of these separately all Contractors involved in constructing the scheme will be required to comply in full with all relevant legislation applicable at the time of construction.

Current examples of relevant legislation are the Health and Safety at Work Etc. Act 1974, Environmental Protection Act 1990, Control of Pollution Act 1974, New Roads and Street Works Act 1991, Construction (Design and Management) Regulations 2015 and Schedule 1 of the Wildlife and Countryside Act 1981

General Requirements

Public/Private Highways

For the purposes of this Section of the Code references to work sites is to the designated worksites in the draft Order including site compounds.

Traffic management proposals shall be agreed with the Highway Authority in advance and shall comply with current legislation and codes of practice. The following requirements will at all times apply to the construction works:

Any temporary footways and ramps on the highway must be surfaced in materials to the satisfaction of the Local Planning Authority and must be accessible by wheelchair users and sight impaired people unless otherwise agreed with the Local Planning Authority.

All openings or obstructions on the carriageway or footway will be barricaded with a continuous rail (lit at night) strong enough to offer necessary resistance should a blind person walk into it; a tapping rail will be provided.

All pedestrian routes diverted onto the carriageway will be clearly defined by continuous barriers, constructed to the requirements of the Local

Planning Authority. The minimum standard is the Chapter 8 requirements appropriate for the situation but enhanced facilities may be required in respect of the following:

Existing access for the emergency services shall be maintained through or past the site and to all properties and public areas affected by the works.

There shall be always at least one accredited supervisor contactable by phone on site when works are in progress. Accreditation shall be a certificate from an approved assessment centre demonstrating that the person is competent to sign and guard road works.

Existing pedestrian routes shall be maintained at all times or diverted to a reasonable alternative route.

Existing bus routes and stops shall be maintained so far as reasonably practicable.

So far as reasonably practicable, all parts of the public highway including drainage systems will at all times be kept free from mud and other loose materials arising from the works. To comply with this the Contractor shall obtain the prior written approval of the Local Planning Authority in respect of the following:

Provision of vehicle wheel cleaning facilities, adequate provision for drainage via settlement tanks and regular maintenance of settlement tanks, during the working hours specified in Section 2.3 of this Code.

Provision of a mechanical road sweeper to clean the work sites hoardings and any mud or debris deposited by site vehicles on roads or near work sites, during the working hours specified in this Code.

Provision of facilities and working arrangements to ensure the adequate sheeting and boarding of all materials including spoil either brought onto or taken off the site to prevent material falling off during its journey.

Vehicles entering and leaving each work site will only be allowed to cross footways via a properly constructed crossing, if required the design of which shall be submitted to and approved in writing by the Local Planning Authority prior to construction. Footways must be kept free of mud.

Access, which is deemed to include both the route and entrance to any work sites by vehicles, shall be as agreed in writing by the Local Planning Authority.

All street furniture, trees (unless they are to be removed/lopped) and other features near the construction works shall be carefully protected in accordance with the requirements of the Local Planning Authority. Any damage caused by the Contractor shall be made good within an agreed timetable to the complete satisfaction of the Local Planning Authority.

Any street furniture, trees or other obstructions outside the area to be occupied by the Contractor, which the Contractor requires to remove in order to gain access or for temporary works shall, subject to the prior consent of the owner, be removed by the Contractor and put back if appropriate on completion of the works. This provision also applies to temporary works.

The Contractor shall ascertain and comply with any restrictions in respect of abnormal load routes as they may affect access to work sites.

The Contractor will work in such a way as to minimise, so far as reasonably practicable, disruption of existing road traffic.

Where any Public Rights of Way to be kept open during construction of the works cross any site where work is being carried out, safe crossing points including appropriate signs and signals shall be approved in writing by the Local Planning Authority.

Works shall be carried out so far as reasonably practicable in accordance with the Highway Authority's specification of the number of lanes to be maintained on- and off-peak on each road affected by the works. All works in the carriageway shall, so far as reasonably practicable, be carried out during off-peak hours, namely 09.30-15.30 Monday to Friday.

Traffic management shall, if required by the Highway Authority, be provided by a specialist subcontractor approved by the Highway Authority. The Contractor shall nominate a Traffic Safety and Control Officer who must be on site and available whenever works are taking place.

The Contractor shall liaise with the public utility companies.

The Contractor shall comply with the Local Planning Authority's environmental policies relating to road works and waste management.

The works are subject to the Construction (Design & Management) Regulations.

The Contractor shall agree with the Local Planning Authority arrangements for notifying near neighbours prior to works.

The Contractor shall carry out road safety audits of works affecting the highway in accordance with a timetable agreed with the Highway Authority prior to the commencement of the relevant area of works on the highway.

Noise and Hours of Working

The Employer will, where appropriate, prepare predictions of construction noise prior to tenders being invited for the construction works in order to establish achievable noise levels at each specific work site. These predictions will be carried out in accordance with BS 5228 and shall be submitted

to the Local Planning Authority together with proposals for the mitigation of impacts for the written approval of the Local Planning Authority prior to the commencement of construction.

Where appropriate, there will be included within the proposed tender documents clearly defined noise criteria which must be complied with by the Contractor. Before construction works start, the Contractor will be required to demonstrate to the Local Planning Authority through appropriate method statements that he will comply with these criteria. If the Contractor fails during the period of the construction works to comply with these criteria the Contractor may face enforcement action from the Local Planning Authority.

To ensure noise mitigation criteria are met, a programme of on-site monitoring by a suitably qualified person will be agreed between the Contractor and the Local Planning Authority. This will include location and frequency of readings and timescales for the submission of results together with any additional mitigation measures proposed to the Local Planning Authority. Any additional measures agreed by the Local Planning Authority shall be implemented by the Contractor. If the Contractor wishes to change his proposed method of working once the construction works have started, then this must be agreed in writing by the Local Planning Authority. Unless otherwise agreed in writing by the Local Planning Authority the hours of working for the construction works shall be limited to between 07.30 and 18.00 Monday to Friday and 08.30 to 14.00 on Saturday. In exceptional cases limited work on Sundays and Bank Holidays may be undertaken by prior written agreement with the Local Planning Authority. The Contractor may propose additional or alternative working hours for construction reasons or the Employer may require the Contractor to undertake certain construction works outside these hours. Any change to these working hours requires the prior agreement of the Local Planning Authority.

Best practical methods of reducing noise from machinery shall be employed at all times. Silencers and mufflers shall be used where applicable, machinery shall be noise reduced models, pumps used at night shall be electric served off the mains, and hydraulic rather than pneumatic equipment shall be used where possible.

Air Pollution

The Contractor will take all reasonable measures to avoid creating a dust nuisance and will, prior to commencement of any construction work, submit to the Local Planning Authority a method statement for approval setting out the proposed measures to be taken to prevent dust nuisance, and which shall be approved by the Local Planning Authority prior to the commencement of any construction work. Upon commencement of the construction work the contents of the approved statement shall be implemented and complied with throughout the period of the construction work.

Examples of measures to prevent dust nuisance to be included in the Contractor's statement are:

Damping down of dusty material using water sprays during dry weather.

The hard surfacing of heavily used areas, which will be kept clean by brushing and water spraying regularly.

All cutting and grinding operations shall be carried out using water-based dust suppression.

The complete sheeting of the bodies of all vehicles carrying spoil and other dusty materials.

During demolition operations, watering at rubble chutes, covering skips and screening of buildings with debris screens/sheets.

No materials shall be burned on site.

The effectiveness of the measures taken will be reviewed at regular intervals by the Employer and Contractor. Any additional measures to be taken shall be approved in writing by the Local Planning Authority prior to implementation.

The Contractor will take all necessary precautions to prevent the occurrence of smoke emissions or fumes from site plant or stored fuel oils for safety reasons and to prevent such emissions or fumes drifting into residential areas, nearby workplaces or areas of public realm. In particular, plant shall be well maintained and measures taken to ensure that it is not left running for long periods when not directly in use.

The Employer will at the request of the Local Planning Authority seek agreements with the Local Planning Authority under the Control of Pollution Act 1974 section 61 on noise limits for work sites and any other relevant issues.

Protection of Surface and Groundwater Resources

The Contractor will obtain the appropriate licences from the Environment Agency (EA) for discharges to watercourses or sewers or groundwater in accordance with relevant statutory provisions.

In planning and carrying out any construction works, precautions must be taken to secure the complete protection of watercourses and water in underground strata against pollution. These should include an investigation of past use of the site to ensure that operations will not disturb contaminated land.

If any pollution occurs, then the Contractor shall advise the EA and the Local Planning Authority immediately and take prompt action to minimise the impact and prevent reoccurrence.

A common cause of pollution from sites is through vandalism. Therefore, the Contractor shall ensure that sites are adequately protected by the provision of secure fences and locked accesses where possible and monitoring by personnel where appropriate.

In order to limit pollution from silt, cement and other potentially polluting materials, the Contractor shall ensure the following measures are followed:

The washout from concrete mixing plant, or the cleaning of ready mixed concrete Lorries must not be allowed to flow into any drain or watercourse. Any residue shall be removed from the site and either recycled or disposed of at a suitably licensed waste management facility.

Site roads must be regularly maintained and kept free from deposits in order to prevent silt, oil or other materials entering any drain or watercourse.

Any lorry wheel cleaning facilities shall be securely constructed with no overflow and effluent shall be contained for proper treatment and disposal.

Before any discharge of water is made from the site, adequate provisions, such as settlement lagoons, must be made to ensure that pollution will not occur. The local EA office shall be consulted in order to obtain approval.

In order to prevent pollution from oil and chemicals:

All fuel and chemical storage must be either in double skinned storage tanks or sited on an impervious base within a bund and secured. The base and bund walls must be impermeable to the material stored and of sufficient capacity to contain 110% of the volume of the largest tank, or 25% of the total capacity of all tanks, whichever is the greater. Filling and refuelling must be strictly controlled and together with any oil storage tanks, should be confined to a location remote from any watercourse or drain. Leaking or empty drums must be removed from the site immediately and taken to an appropriate facility for treatment/disposal.

All valves and trigger guns shall be as resistant to unauthorized interference and vandalism as possible and should be turned off and securely locked when not in use.

The capacity and contents of any tank shall be clearly marked on the tank and a notice displayed requiring that valves and trigger guns be locked when not in use.

Any tanks or drums shall be stored in secure containers or compounds. These must be kept locked when not in use.

Before any tank is removed or perforated, particularly during demolition works, all contents and residues must be emptied by a competent operator for safe disposal. Pipes may contain significant quantities of oil or chemicals, and shall be capped, or valves closed to prevent spillage.

Prior to the commencement of construction the Contractor shall submit for written approval by the Employer and the Local Planning Authority his proposed procedures for minimising the effects of accidental spillage of pollutants and shall maintain the necessary remedial equipment on site throughout the construction period.

Handling and Disposal of Contaminated Materials and Other Wastes

The Contractor shall take all necessary measures to deal with noxious and toxic materials encountered. All contaminated sites and the hazards that they present shall be identified, as far as reasonably practicable, before work starts. If hazardous materials are found during site clearance, the contractor shall stop all work and secure the site from access by any person until methods of safe removal and disposal have been agreed with the client.

The Contractor shall refer to the HSE publication, HSG 66 'Protection of Workers and the General Public during the Development of Contaminated Land', HMSO 1991, for guidance on precautions required during construction on potentially contaminated sites. In particular, the Contractor shall ensure that all necessary precautions are taken to protect workers exposed to any noxious and toxic chemicals such that:

Protective clothing, including protective overalls, hand protection and safety wellingtons to be worn.

Contact with fill materials to be avoided.

If skin contact occurs, the affected area shall immediately be washed.

Smoking and eating on site shall be prohibited.

Shoes and boots shall be cleaned off prior to leaving the site.

Entry into confined spaces and trenches shall be minimised where possible. If entry is necessary, then clear procedures shall be developed for entry into trenches, manholes, etc, where there is a possibility of oxygen deficiency or asphyxiation or toxic gases. This shall include monitoring for a range of gases, etc.

If it is necessary to remove contaminated materials and other wastes from site, then open Lorries or skips used for removal shall be securely sheeted before vehicles leave the site. Only authorised carriers of waste shall be used. The written approval of the Local Planning Authority must be obtained of the waste management facilities to be used together with the related volumes and routing of waste delivery vehicles. Detailed records of disposal will be necessary and the Contractor shall agree this with the Environment Agency.

The Contractor shall obtain the prior written approval of the Local Planning Authority before any imported material is brought onto any part of the construction site.

The Contractor shall endeavour to limit the amount of waste created during construction by seeking to minimize the initial use of materials and then recycling materials where appropriate.

If the Contractor wishes to arrange for any recycling of contaminated materials encountered during the construction works, then before undertaking any recycling measures he shall consult with and obtain the prior written approval of the Local Planning Authority to the recycling of the materials.

The Contractor shall maintain written records (including waste transfer documentation) for inspection by the Employer and the Local Planning Authority detailing the disposal off site of all waste materials.

All proposals for the temporary storage of soil and spoil shall receive the prior approval of the Local Planning Authority and include the proposals for the reinstatement of any land used for this purpose.

Trees and Vegetation

Before any works take place on site, the Employer shall establish, with the Local Planning Authority, a Tree and Vegetation Protection Policy.

The Policy will specify measures for dealing with trees that may be directly or indirectly affected by the works. The policy must be consistent with BS 5837 'Guide for Trees in relation to Construction'. In particular:

The Contractor shall ensure that any trees or hedges or ecologically sensitive areas which are not to be removed under the Contract shall be protected by fencing and visible barriers prior to works commencing and these shall be maintained throughout the works. Such fencing shall include protection of the area occupied by the tree roots. The timing of the fencing erection and its

removal, and any access into ecologically sensitive areas shall be agreed in advance with the Local Planning Authority.

Where any existing trees or hedges are to be removed, the Contractor shall before commencing, any clearing in the areas concerned, agree with the Local Planning Authority those areas to be protected, those to be removed and any measures/working methods necessary to safeguard retained trees.

If the Contractor considers it essential to trim branches or to carry out work adjacent to roots, he shall first obtain the permission of the Local Planning Authority. Such permission, if given, may include a requirement to hand dig and may specify the size of roots to be retained and remedial/reinstatement procedures.

Site Boundaries/Hoardings/Temporary Structures on the Public Highway

The Contractor shall ensure all designated work sites are completely and adequately fenced off from members of the public to prevent any livestock and people entering. Fencing shall be constructed to the reasonable satisfaction of the Local Planning Authority, with solid boarding used near houses to reduce noise. If hoardings are provided bulkhead lights shall be fitted where appropriate.

The provision of gates in the fencing or hoarding shall, as far as practicable, be positioned, constructed and kept shut to minimise noise to nearby properties from the work sites direct or from plant entering or leaving the site.

The Contractor shall ensure that if hoardings are provided. They are painted on the external face in a plain uniform manner and include a project logo agreed with the Local Planning Authority.

The Contractor is expressly prohibited from displaying or allowing to be displayed any advertisement, notice etc (including illicit bill or fly posting) on the hoardings without the prior permission of both the Employer and the relevant local authority. The Contractor shall also ensure that all graffiti or defacements to the hoardings are removed and made good as soon as reasonably possible.

There shall be provided at each operating work site an information board detailing information on the site programme, together with telephone contacts (including an emergency telephone number) for use by members of the public who wish to lodge complaints.

The Contractor in accordance with any appropriate licence granted by the Highway Authority shall maintain any fenced storage areas, scaffolding gantries, loading/unloading bays, skips or other temporary structures on the public highway provided by the Contractor.

The Contractor shall ensure that construction buildings and equipment are sited so as to minimise visual intrusion, consistent with the efficient operation of each work site. The layout of any Contractor's compounds shall be submitted to and approved in writing by the Local Planning Authority prior to commencement of construction.

Site Activities

The Contractor shall ensure the following general requirements are met in relation to the construction works:

Smoking areas will be provided, at suitable locations at ground level. Smoking must not be allowed at any location below ground level.

Rubbish will be removed at least weekly and each work site kept clean and tidy.

Toilet facilities will be kept clean at all times.

Food waste will be kept contained and removed at least weekly.

Wheel washing facilities will be brushed clean at monthly intervals.

Detailed daily records will be kept of climatic conditions including rainfall, minimum and maximum temperatures and humidity.

Records of construction plant used on the site shall be maintained at weekly intervals.

The Contractor shall comply with the requirements of the local fire authority and take all necessary measures to minimize fire risks.

A nominated representative(s) from the Employer and the Local Planning Authority and their agents (e.g. a local authority Environmental Health Officer) will inspect each work site at regular intervals. Should the Contractor not be complying in any respect with the Code of Construction Practice he shall have a period of three days or such shorter period as may be deemed necessary by the Employer to rectify the situation. Otherwise the Local Planning Authority may commence enforcement proceedings.

The Contractor will not allow any residential accommodation on site except with the prior consent of the Local Planning Authority. Mess rooms, locker rooms, toilets and showers will be permitted.

Where practicable and suitable the Contractor will arrange for a viewing platform at certain sites, these to be agreed with the Local Planning Authority.

At each work site all vehicles shall enter and exit in a forward direction except where space restriction does not permit this. In that event movement shall be properly controlled by a responsible person(s) observing the rear of the vehicle.

All loading and unloading of vehicles will take place off the public highway unless a temporary Traffic Regulation Order has been deemed necessary to revoke a loading ban or it is absolutely unavoidable in which case the Contractor should seek the approval of the Highway Authority.

The Contractor shall provide suitable lighting to the site boundaries with illumination sufficient for the safety of the passing public including mobility-impaired people. Site lighting must be designed, positioned and directed so as not to unnecessarily intrude on passing drivers on public highways, and having due regard to residential premises neighbouring the site.

If the Contractor provides site security cameras, these must be located in positions that will not cause offence to local residents or businesses.

On completion of the construction works the Contractor will clear away and remove from each work site all plant, surplus materials, rubbish and temporary works of every kind and leave the whole of each work site and works in a clean and tidy condition to the satisfaction of the Employer and the Local Planning Authority.

The Contractor shall agree with the Employer and the Local Planning Authority proposals for the reinstatement of all work sites prior to the commencement of the construction works.

Liaison and Awareness

The contractor will use the Considerate Contractor or similar approved scheme and set out its proposals, to be agreed with the Local Planning Authority for informing local residents, local businesses and users of any public realm affected by the works of the likely duration and impacts of the works.

The Employer will put into place a procedure whereby members of the public can if necessary make contact by telephone direct with a 'hot line' facility, or alternatively provide details of the named contacts for written complaints. The Employer will give consideration to the establishment of a number of local liaison fora during the construction of the works involving representatives from the Employer, Contractor, local councils and the public.

The Contractor will ensure that details of the relevant contacts within the Employer and Local Planning Authority are readily available, and shall ensure all site construction staff are easily identifiable to the public by use of identity cards or an equally effective system.

The Contractor will ensure that all site construction staff have received an induction that includes all the issues contained in this Code of Construction Practice.

The Contractor will introduce a system for the recording and dealing with of all complaints, which shall be collated by them and a copy given to the Local Planning Authority and the Employer on a regular basis

Relevant BS Standards and Guidelines

In addition to compliance with all relevant legislation applicable at the time of the construction works and compliance with certain BS standards referred to in Section C of this Code of Practice the following additional BS standards and guidelines (including any updates) issued by various statutory bodies must be complied with:—

BS 4142: 1997 Method of rating industrial noise affecting mixed residential and industrial areas

BS 5228:2009 Code of practice for noise and vibration control on construction and open sites- parts 1 and 2

BS 6164:1990 Safety in tunnelling in the construction industry

BS 8005: Part 3 - 1989 Sewerage Part 3 Guide to planning and construction of sewers in tunnels

BS 6031: 1981 Code of Practice for earthworks

BS EN 60651 (1994) Specification for sound level meters

HSE Guidance Notes GS 29/1 to 29/4- Health and safety in demolition work.

HSE Guidance Note EH 40/96 - Occupational Exposure Limits 1996

Relevant EA Guidelines and Regulations

Chapter 8 of the Traffic Signs Manual 1991

Highways Act 1980 and Amendment Act 1986

HSE Guidance Note HS(G)66 - Protection of Workers and the General Public during Development of Contaminated Land 1991

Safety At Street Works And Road Works Code Of Practice 2002

New Roads and Streetworks Act 1991

Traffic Signs Regulations and General Directions 1994

NJUG recommendations

Road Traffic Act 1988 and 1991

Road Traffic Regulation Act 1987

Construction (Design & Management) Regulations 2015