GALLERY 2
Architects

Chapel Rise, Station Lane,
Little Barrow, CHESTER CH3 7JW
Tel: 01244 303345 E: simon@gallery2.fsbusiness.co.uk


Client: La Tasca Restaurants Ltd

Project: La Tasca, Didsbury

Title: Layout Plans :as existing

Date:	Scale:	Job no.	Stage:	Drawing No.
APR/05	1:100 @ A3 1:50 @ A1	G2.37	D	S02
Drawn: SDJ				

Date:	Revision:
April/05	0 First Issue

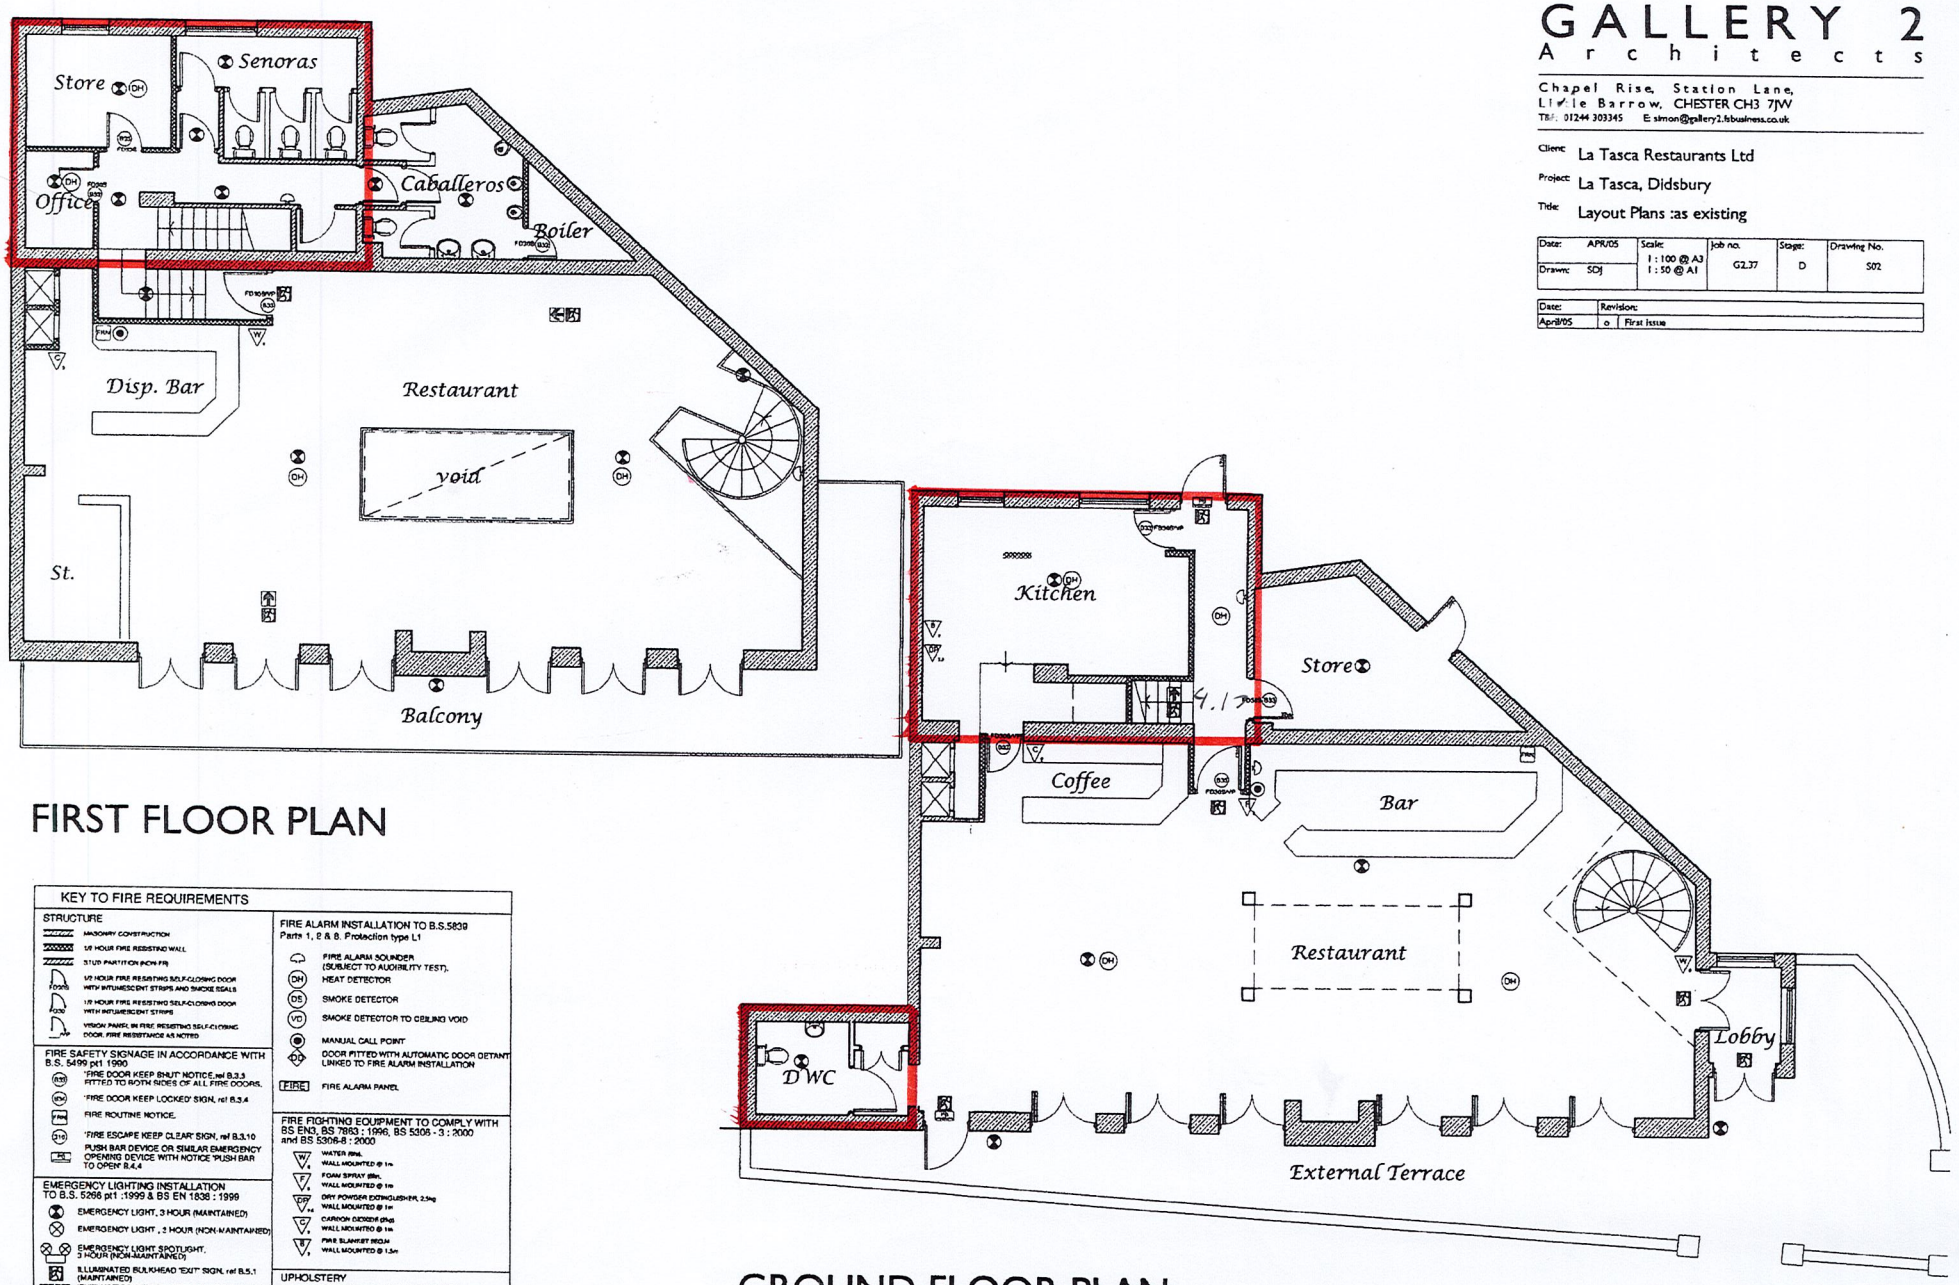

FIRST FLOOR PLAN

GROUND FLOOR PLAN

KEY TO FIRE REQUIREMENTS

STRUCTURE

- MASONRY CONSTRUCTION
- 1/2 HOUR FIRE RESISTING WALL
- STUD PARTITION (NON-FR)
- FD30S — 1/2 HOUR FIRE RESISTING SELF-CLOSING DOOR WITH INTUMESCENT STRIPS AND SMOKE SEALS
- FD30 — 1/2 HOUR FIRE RESISTING SELF-CLOSING DOOR WITH INTUMESCENT STRIPS
- VISION PANEL IN FIRE RESISTING SELF-CLOSING DOOR. FIRE RESISTANCE AS NOTED

FIRE SAFETY SIGNAGE IN ACCORDANCE WITH B.S. 5499 pt1 1990

- FD30 — 'FIRE DOOR KEEP SHUT' NOTICE, ref B.3.3 FITTED TO BOTH SIDES OF ALL FIRE DOORS.
- KEY — 'FIRE DOOR KEEP LOCKED' SIGN, ref B.3.4
- FRN — FIRE ROUTINE NOTICE.
- 210 — 'FIRE ESCAPE KEEP CLEAR' SIGN, ref B.3.10
- PBE — PUSH BAR DEVICE OR SIMILAR EMERGENCY OPENING DEVICE WITH NOTICE 'PUSH BAR TO OPEN' B.4.4

EMERGENCY LIGHTING INSTALLATION TO B.S. 5266 pt1 :1999 & BS EN 1838 : 1999

- EMERGENCY LIGHT, 3 HOUR (MAINTAINED)
- EMERGENCY LIGHT , 3 HOUR (NON-MAINTAINED)
- EMERGENCY LIGHT SPOTLIGHT, 3 HOUR (NON-MAINTAINED)
- ILLUMINATED BULKHEAD 'EXIT' SIGN, ref B.5.1 (MAINTAINED)
- 'EXIT' NOTICE WITH DIRECTION ARROW, ref B.5.2 (MAINTAINED)

FIRE ALARM INSTALLATION TO B.S.5839 Parts 1, 2 & 6. Protection type L1

- FIRE ALARM SOUNDER (SUBJECT TO AUDIBILITY TEST).
- DH — HEAT DETECTOR
- DS — SMOKE DETECTOR
- VD — SMOKE DETECTOR TO CEILING VOID
- MANUAL CALL POINT
- DD — DOOR FITTED WITH AUTOMATIC DOOR DETENT LINKED TO FIRE ALARM INSTALLATION
- FIRE — FIRE ALARM PANEL

FIRE FIGHTING EQUIPMENT TO COMPLY WITH BS EN3, BS 7863 : 1996, BS 5306 - 3 : 2000 and BS 5306-8 : 2000

- WATER 9ltr. WALL MOUNTED @ 1m
- FOAM SPRAY 6ltr. WALL MOUNTED @ 1m
- DRY POWDER EXTINGUISHER, 2.5kg WALL MOUNTED @ 1m
- CARBON DIOXIDE 5Kg WALL MOUNTED @ 1m
- FIRE BLANKET REGH WALL MOUNTED @ 1.5m

UPHOLSTERY

ALL UPHOLSTERY TO SATISFY CIGARETTE AND MATCH IGNITABILITY TEST AND IGNITION SOURCE 5 TESTS AS SPECIFIED IN BS 5852 : 1990 (1998)