01 Herbaceous Planting
1:20 @ A3

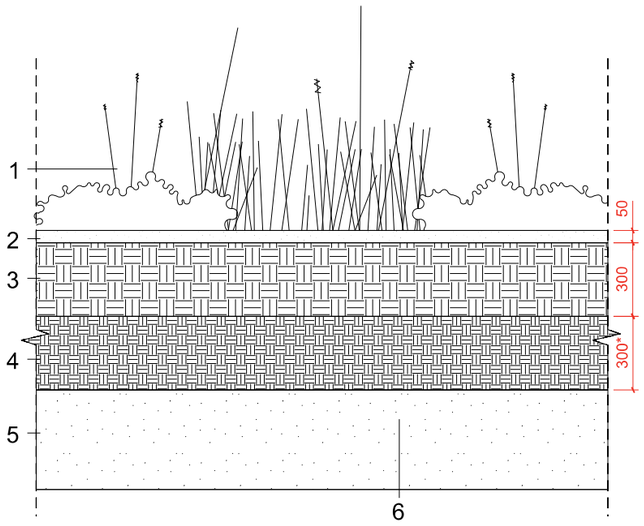

1. Planting proposals.
2. Mulch layer 50mm depth. **Refer to spec clause Q31/493A**
3. Landscape Topsoil. **Refer to spec clause Q28A/210**
4. Landscape Subsoil. **Refer to spec clause Q28A/215**
*Increase subsoil depth in tree trenches. Tree trenches are shown on SEW GA 0198_MAY-SEW-N01-1000-DR-L-201104.
5. Terra firma.
6. When sandstone or clay alluvium/ glacial till is within 500mm of the formation layer, Contractor to carry out percolation tests using BRE 365 testing specification. If test fails then include 150mm drainage layer.

Coordination item:
Civil engineer to review rain garden build up and notes on percolation

02 Rain Garden
1:20 @ A3

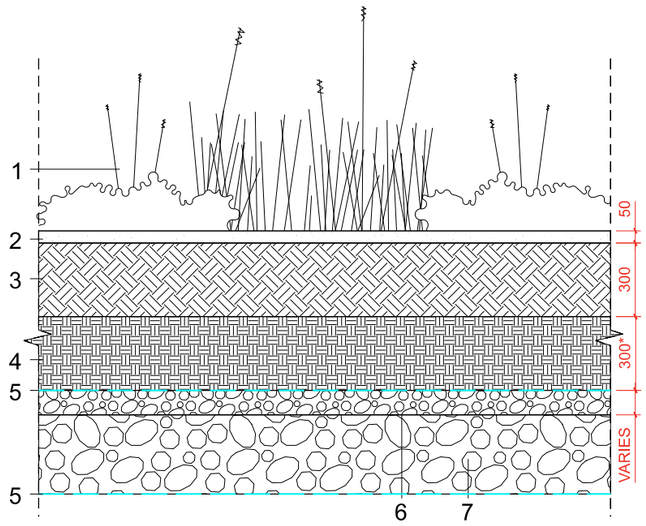

1. Planting proposals.
2. Mulch layer 50mm depth. **Refer to spec clause Q31/493A**
3. Rain Garden Topsoil. **Refer to spec clause Q28A/255**
4. Landscape Subsoil. **Refer to spec clause Q28A/215**
*Increase subsoil depth in tree trenches. Tree trenches are shown on SEW GA 0198_MAY-SEW-N01-1000-DR-L-201104.
5. 305gsm hessian separation layer with 100mm laps up abutting faces and 300mm laps at joins.
6. Free draining stone if required above 'Top of storage' level to rain garden. **Refer to spec clause Q28A/300**
7. Rain garden aggregate. Refer to engineer's detail and specification.

Note: Detail to be read in conjunction with SEW Rain Garden details 0198_MAY-SEW-N01-1000-DR-L-201304.

Coordination item:
Civil engineer to review rain garden build up and notes on percolation

03 Wildflower Turf
1:20 @ A3

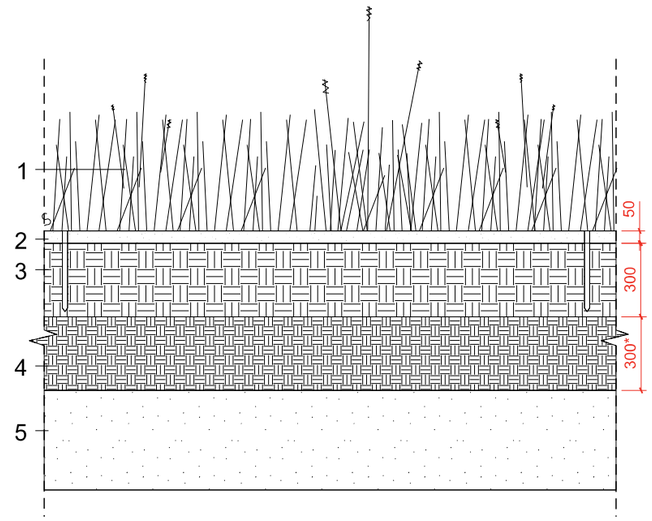

1. Pre-grown turf. For planting on slopes use biodegradable pegs to suppliers recommendation.
2. Mulch layer 50mm depth. **Refer to spec clause Q31/493A**
3. Landscape Topsoil. **Refer to spec clause Q28A/210**
4. Landscape Subsoil. **Refer to spec clause Q28A/215**
*Increase subsoil depth in tree trenches. Tree trenches are shown on SEW GA 0198_MAY-SEW-N01-1000-DR-L-201104.
5. Terra firma.

General Notes

Rev	Date	Reason for Issue	Chk
P01	24.03.26	Stage 3	SEW

Keyplan

N

Scale Bar

Studio Egret West
3 Brewhouse Yard
London EC1V 4JQ
0207 549 1730
hello@egretwest.com
studioegretwest.com

©2015 SEW ltd

Client
Mayfield Medlock Ltd

Project
Mayfield Phase 1_ Public Realm

Drawing Title
Typical Soft Landscape Details Landscape Build Ups

Project Number	Status
0436	STAGE 3
Scale at A3	Date
1:20	24.03.26
Drawn by	Checked by
TH	SEW

Drawing Number	Revision
0198_MAY-SEW-N01-1000-DR-L-203501	P01