

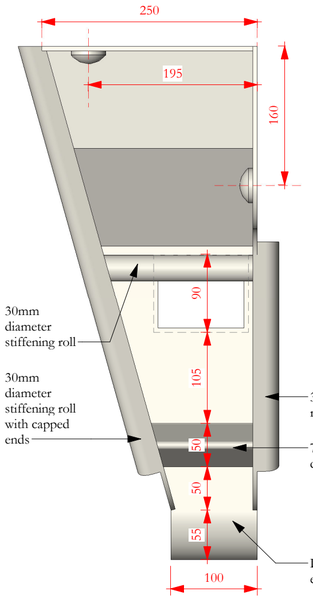



Plan

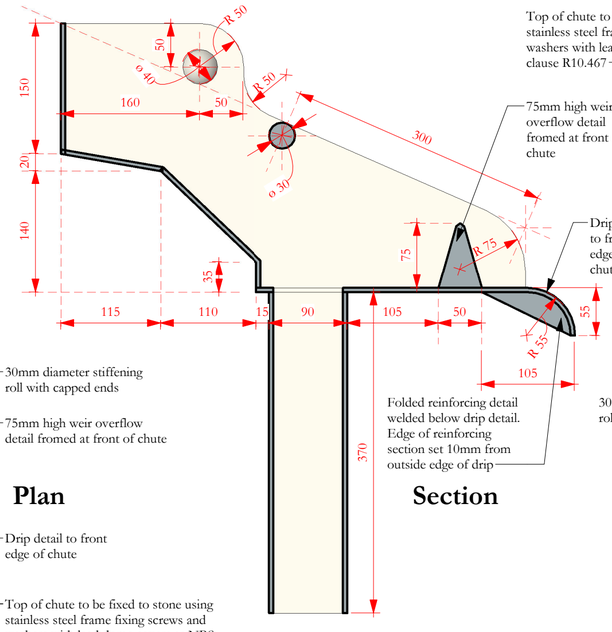


Section

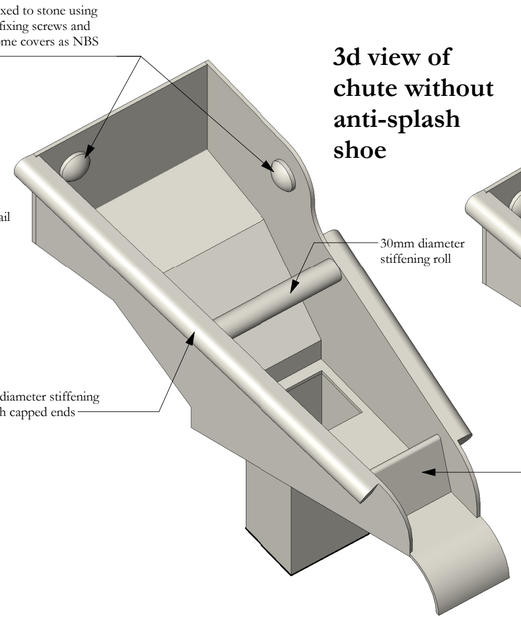


3d view of chute without anti-splash shoe

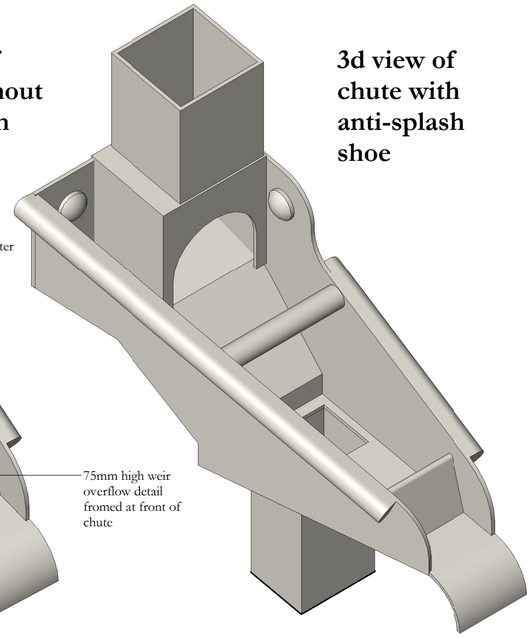


3d view of chute with anti-splash shoe

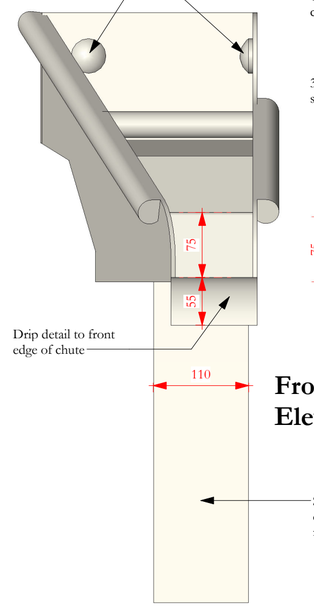


Front Elevation

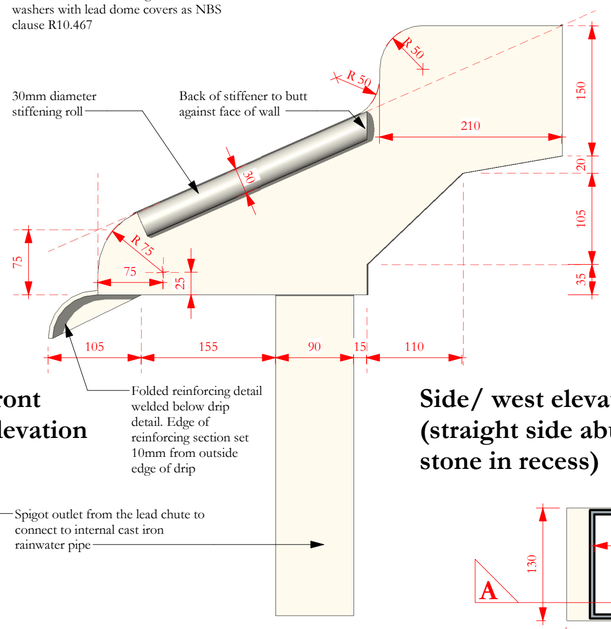


Side/ west elevation (straight side abutting stone in recess)

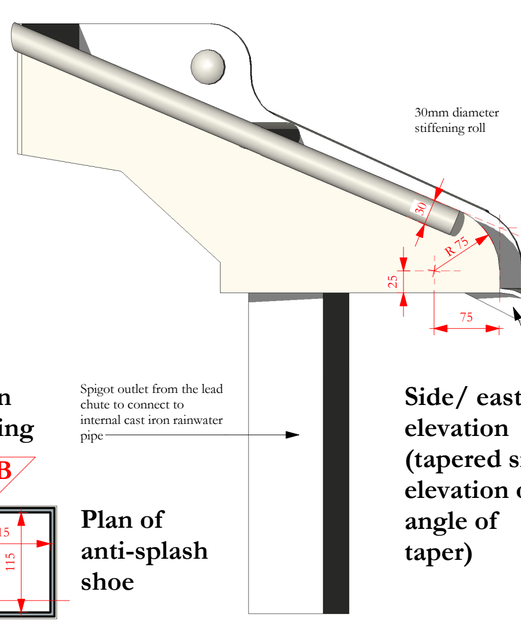


Side/ east elevation (tapered side elevation on angle of taper)




Plan of anti-splash shoe




3d view of anti-splash shoe



Anti-splash shoe section A-A



Elevation of anti-splash shoe



Anti-splash shoe section B-B

SCALE BAR
1 to 5

0 100 200 300

All dimensions of the stone within the recess where the chute is to be installed are to be carefully checked before manufacture is commenced. A profile of the steps from the upper part of the recess to the top of the string course should be made to ensure that the chute sides can be made accurately. Dimensions of the chute should be adjusted if necessary to take account of minor variations between the dimensions shown on this drawing and the check dimensions and profile to ensure that the chute fits accurately

The chute and anit-splash shoe are to be fabricated from code 8 lead sheet. The main body of the chute is to be formed from one sheet of lead with folded and bossed details formed wherever possible to ensure that welded joints are minimised. Where welded joints are necessary these should be neatly formed and filed and sanded to for to create a smooth even appearance

ISSUE	DATE	APPROVED	DRAWN	DESCRIPTION
	18/10/2024	JC	GR	First issue

OUR TOWN HALL PROJECT

PURCELL

Project Office, Room 308, Town Hall, MANCHESTER M60 2L1
+44 (0) 7970 097 432
www.purcelluk.com

PROJECT STATUS	RIBA stage 5
CLIENT	Manchester City Council
PROJECT	Our Town Hall
DRAWING TITLE	Rainwater pipe 31 offset chute and anti-splash shoe details
SIZE & SCALE	A2: 1 : 5
DRAWING STATUS	S4 Construction
JOB NUMBER	236959
DRAWING NO.	OTH-PUR-TH-RF-DWG-A-7631
REV	-

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.

18/10/2024 15:35:07