ENTRANCE CANOPY LEVEL 0

Design:



Setting Out:



To Supply

1 of folded aluminium fascia tray. Final colour TBC to match existing fascia.

Overall size 7880mm x 350mm.


To have stencil cut detail to the face and backed in opal acrylic with 20mm opal acrylic inlays. LED light sheet behind stencil cut areas.

Lumen Level <300 Candelas per sq.m.

Example:



Location:

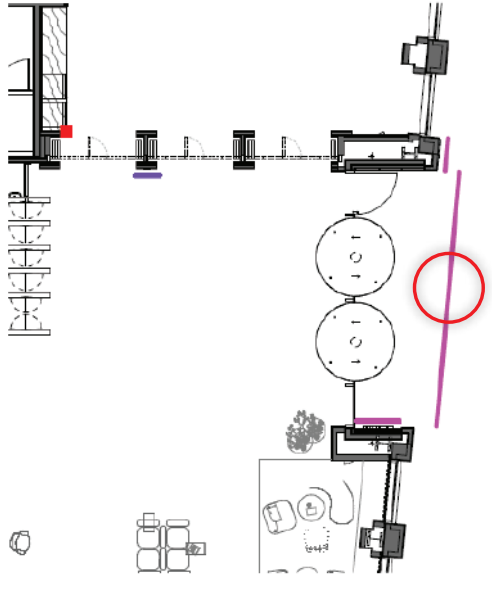

ENTRANCE SIGNS LEVEL 0

Design:



To Supply


2 sets of built up flat faced letters.
Powder coated two colours.

BNY - Pantone 2965
Arrow - Pantone 2221


Overall size 920mm x 612mm with 50mm deep returns.

With DAYLIGHT WHITE Halo Illumination and rear stud fixings.


Setting Out:

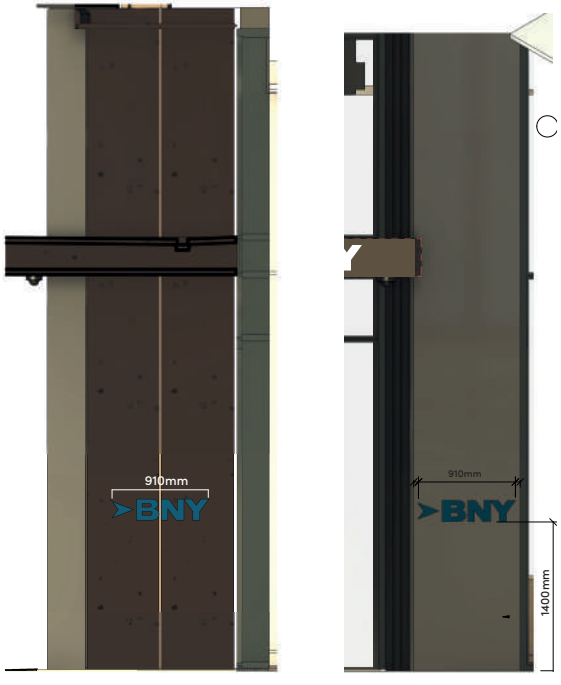


Fitting Location:

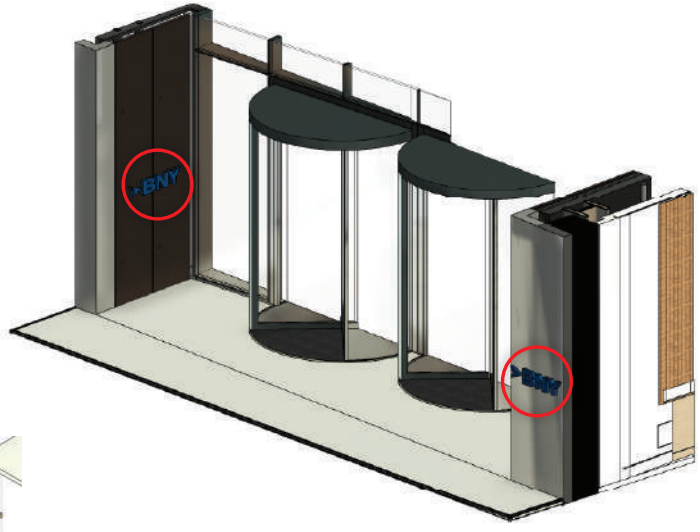

Location:

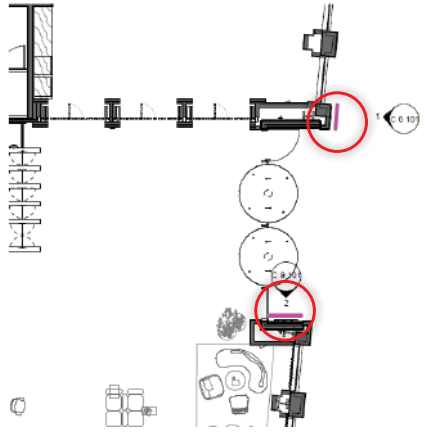

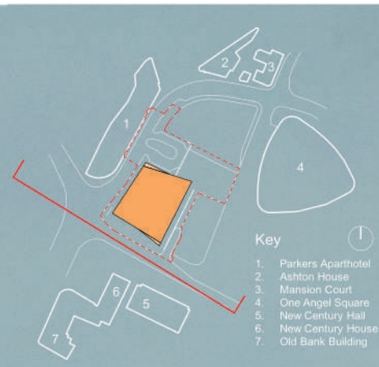

Indicative Massing of Proposed Angel Meadows

F
A
B
C
A
+90.300 m AOD
+86.505 m AOD

PARKER'S HOTEL & APARTMENTS
CORPORATION STREET
4 ANGEL SQUARE
BESWICK ROW
EURO CAR PARKS
ANGEL SQUARE

EXTENT OF SITE

This drawing is copyright
Do not scale off dimensions.
All dimensions to be checked on site by contractor.
Contractor to report any dimensional discrepancies, errors or omissions prior to commencing on site.

Local Drawing No 10257-SHP-Z1-ES-EL-A-B5D3-G200-002

A	Reconstructed Stone Precast Concrete Cladding Grey / Green Colour. Polished Finish.	E	Metal Ceiling Bulkhead Trim Dark Grey PPC Finish to Match C.	J	Aluminium Demountable Louvre System Dark Grey PPC Finish (RAL 7021)	N	Aluminium Framed Door System Dark Grey PPC Finish to Match C with Privacy Frit to Clear Glazed Unit.
B	Reconstructed Stone Precast Concrete Cladding Grey / Green Colour. Deep Acid Etched Finish.	F	Metal Horizontal Louvre Plant Screen Dark Grey PPC Finish.	K	Aluminium Louvred Cladding System with Integrated Doors / Shutter Dark Grey PPC finish to Match C.	P	Living Green Wall System
C	Aluminium Window System Dark Grey Frames with Clear Double Glazed Units.	G	Aluminium Framed Curtain Wall System Glass to Glass Joints (No Face Caps) with Clear Glazed Units.	L	Anodised Aluminium Rainscreen Cladding Bronze Finish	Q	Facing Brick External Wall Dark Grey Colour to Match Primary Substation.
D	Back Painted Opaque Glazing (Glass to Glass Joints to Office Level Glazing)	H	Aluminium Framed Curtain Wall System Glass to Glass Joints (No Face Caps) with Shadow Box Units.	M	Anodised Aluminium Entrance Canopy Black Finish.	R	Glazed Revolving Entrance Doors

Rev	Date	Description
00	24/04/2019	Planning Application Submission
01	23/09/2020	NMA Drawing Submission

4 ANGEL SQUARE

Project Title
NOMA - 4 Angel Square
Miller Street, Manchester

Drawing Title
GA Elevation - South - Miller Street

Job No
10257

Scale
1:500 @ A3

Status
PLANNING

BSI Drawing Code
10257-SHP-Z1-ES-EL -A-B5D3-G200-001

Revision
01

simpsonhaugh
Manchester +44 (0)161 835 2345
London +44 (0)20 7549 4000

© SimpsonHaugh and Partners 2020