NOTES

ORIGINAL A1

DO NOT SCALE FROM THIS DRAWING.
ALL DIMENSIONS TO BE CHECKED ON SITE.
(DRAWINGS MAYBE SCALED FOR LOCAL AUTHORITY & PLANNING PURPOSE ONLY)
COPYRIGHT PROTECTED.

PLANNING

CONSULTANT REFERENCES IN DRAWING:


STRUCTURAL - REF/REVISION

0 0.20 0.40 0.60 0.80 1.0m

Scale 1:20

PARTITION TYPE - P1	
TYPICAL PARTITION DETAIL WITH INSULATION WITHIN SUITE.	
1	TWO LAYERS OF 12.5MM GYPROC WALLBOARD FIXED WITH SUITABLE BRITISH GYPSUM SCREWS AT 300MM CENTRES (200MM CENTRES AT EXTERNAL ANGLES)
2	GYPFRAME 48mm S 50 'C' STUDS AT SPECIFIED CENTERS
3	25mm ISOVER INSULATION
4	GYPFRAME CHANNEL SUITABLY FIXED TO FLOOR AT 600MM CENTRES (IN TWO LINES STAGGERED BY 300MM FOR 94MM AND 148MM CHANNELS). DEEP CHANNEL FOR HEIGHTS BETWEEN 4200MM AND 8000MM OR EXTRA DEEP CHANNEL FOR HEIGHTS OVER 8000MM
5	GYPROC SEALANT FOR OPTIMUM SOUND INSULATION
6	GYPROC JOINTING MATERIAL BULK FILL WHERE GAP EXCEEDS 5mm
7	INDICATIVE SKIRTING
8	GYPFRAME GFT1 FIXING T OR GFS1 FIXING STRAP PROGRESSIVELY INSERTED BETWEEN BOARD EDGE AND STUDS TO SUPPORT HORIZONTAL BOARD JOINTS
9	GYPFRAME 'C' STUD SUITABLY FIXED TO WALL AT 600mm CENTRES (IN TWO LINES STAGGERED BY 300mm FOR 92mm AND 146mm STUDS)
10	DEFLECTION HEAD DETAIL (FORMING APPROX 20MM SHADOW GAP SUBJECT TO MANUFACTURER DETAILS)
11	ENVIROGRAF UNDERFLOOR ACOUSTIC BARRIER OR SIMILAR


TYPICAL HEAD ABUTMENT DETAIL

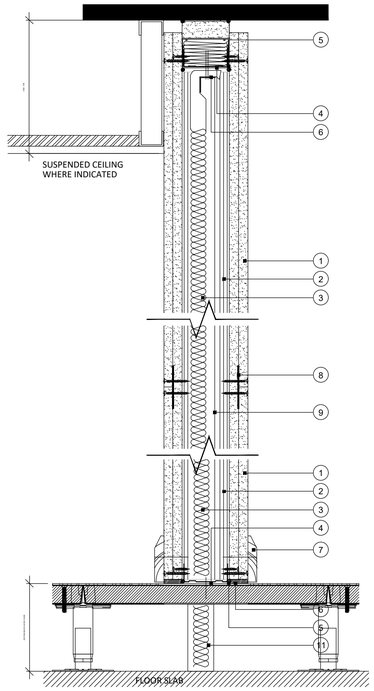

TYPICAL BASE ABUTMENT DETAIL

P1 PARTITION TYPE 1 SECTION
Scale: 1:20@A1


PARTITION TYPE - P1 **TYPICAL PARTITION CORNER DETAIL**	
1	TWO LAYERS 12.5mm GYPROC WALLBOARD FIXED WITH SUITABLE BRITISH GYPSUM SCREWS AT 300MM CENTRES (200MM CENTRES AT EXTERNAL ANGLES)
2	GYPFRAME 48 S 50 'C' STUDS AT SPECIFIED CENTRES
3	50mm ISOVER ACOUSTIC INSULATION PARTITION ROLL (APR1200)
4	GYPFRAME 'C' STUD FIXED THROUGH BOARD TO STUDS WITH SUITABLE BRITISH GYPSUM SCREWS AT 600MM CENTRES IN TWO LINES STAGGERED BY 300MM
5	EXISTING ANTICIPATED 'C' STUDS AT JUNCTION
6	GYPFRAME GA6 SPLAYED ANGLE TO RECEIVE OUTER LAYER BOARD FIXINGS
7	MINIMUM ANGLE ENSURES GYPFRAME GA6 SPLAYED ANGLE IS FIXED TO STUDS AT EXTERNAL ANGLE
8	NOMINAL 10MM GAP BETWEEN BOARDS

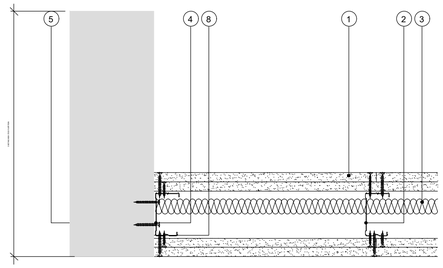

AB-1 ABUTMENT DETAIL 1
Scale: 1:20@A1


AB-01

PARTITION TYPE - P1 **TYPICAL PARTITION T-JUNCTION DETAIL**	
1	TWO LAYERS 12.5mm GYPROC WALLBOARD FIXED WITH SUITABLE BRITISH GYPSUM SCREWS AT 300MM CENTRES (200MM CENTRES AT EXTERNAL ANGLES)
2	GYPFRAME 70 S 50 'C' STUDS AT SPECIFIED CENTRES
3	50mm ISOVER ACOUSTIC INSULATION PARTITION ROLL (APR1200)
4	GYPFRAME 'C' STUD FIXED THROUGH BOARD TO STUDS WITH SUITABLE BRITISH GYPSUM SCREWS AT 600MM CENTRES IN TWO LINES STAGGERED BY 300MM
5	ADDITIONAL GYPFRAME 'C' STUDS AT JUNCTION
6	NOMINAL 10MM GAP BETWEEN BOARDS

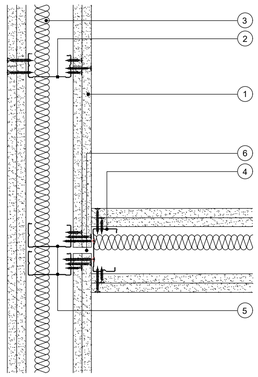

AB-2 ABUTMENT DETAIL 2
Scale: 1:20@A1

AB-02

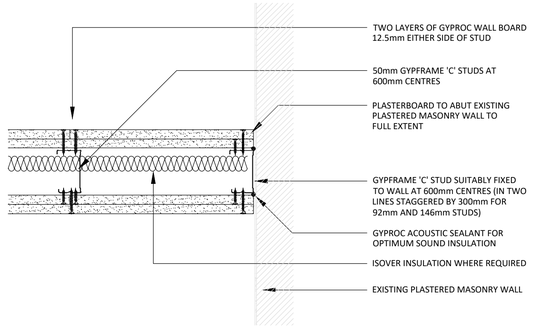

AB-3 ABUTMENT DETAIL 3
Scale: 1:20@A1

AB-03

REV	DATE	DESCRIPTION	DRAWN	CHECKED
-	29.04.26	FIRST ISSUE	JV	MY

BLOK PROJECTS

PROJECT
Wittington Investments
40 Princess Street
Manchester

DRAWING REFERENCE
ALL FLOOR
TYPICAL PARTITION DETAILS

DRAWN	CHECKED	SHEET No		
JV	MY	ALL-PD		
STAGE	REV	JOB REFERENCE	DRAWING SCALE	DATE
-	-	BLOK-E25142	1:20 @A1	28/04/26

WEBSITE : www.blokprojects.com
TELEPHONE : +44 (0)161 452 3668
EMAIL : info@blokprojects.com