Confirmation of Colours:

KEY:

4. Single storey curtain wall glazing to F+B unit. - **RAL 9011**
5. F+B Glazed Entrance Doors - **RAL 9011**
7. Existing windows to be replaced. - **RAL 9011**
20. New opening to be made in level 1 stair lobby for proposed AOV windows. - **RAL 9011**
21. Proposed new full height windows to fit existing louvre S.O. - **RAL 9011**
22. New window on level 2. - **RAL 9011**
11. Rooftop plantroom. Existing walls to be refurbished/ painted. Louvres to Hale Top elevation (3201). - **RAL 9011**
1. Aluminium clad facade below canopy with tapered entrance to form recess. **RAL 3004**
2. Large picture window within aluminium clad facade to ground floor entrance. **RAL 5023 + RAL 3004**
12. Aluminium rainscreen cladding to ground floor area with no glazed curtain walling. **RAL 3004**. To include colour matched fire escape doors.

ALL RAL'S STATED ARE APPROXIMATE ONLY UNTIL FINAL PRODUCT SAMPLES CONFIRMED



Proposed Elevation - Hale Top
Scale: 1:200


SCALE

0 1 2 5 10

GENERAL NOTES

1. Drawing are for information only. Awaiting soft strip/ demolition of existing structure
2. This drawing is to be read with all other relevant drawings, specifications and relevent information.
3. All dimensions are in millimetres unles otherwise stated
4. Do not scale from this drawing, use noted dimensions only. All dimensions and levels to be checked by the contractor prior to commencement of works.
5. No part of this drawing may be reproduced without prior written permisison of the author of this document

LOCATION KEY:

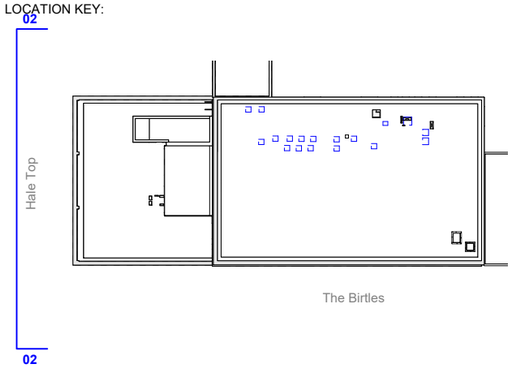

KEY:

1. Aluminium clad facade below canopy with tapered entrance to form recess. RAL 3004 + RAL 5023
2. Large picture window within aluminium clad facade to ground floor entrance. RAL 5023
3. Existing canopy including soffit overclad with aluminium to match facade below. Profile to accomodate signage above. RAL 5023
4. Single storey curtain wall glazing to F+B unit. RAL 9011
5. F+B Glazed Entrance Doors. RAL 9011
6. Existing tiled facade. Existing services fixed to external face to be tidied up.
7. Existing windows to be replaced. RAL 9011.
8. New roof finish and aluminium fascia to canopy with painted soffit. Extent of canopy refurbishment shown by blue line.

KEY (continued):

9. Signage fixed to aluminium canopy. To be covered by seperate signage/ advertisement consent.
10a. Existing brickwork to main building.
10b. New cementitious facia board.
11. Rooftop plantroom. Existing walls to be refurbished/ painted. Louvres to Hale Top elevation (3201). RAL 9011.
12. Aluminium rainscreen cladding to ground floor area with no glazed curtain walling. RAL 7038 To include colour matched fire escape doors.
13. Existing window to be removed and opening infilled.
14. Proposed perimeter handrail for health and safety/ maintenance.
15. Painted finish to escape door surround. Colour TBC. To include colour matched fire escape doors.

KEY (continued):

16. Potential Digital advertising/ information screens. To be covered on seperate advertisement consent application.
17. Potential position for projection. To be covered on seperate advertisement consent application.
18. Existing surface mounted cables currently located on brickwork to be fixed under projecting facade .
19. Rooftop plant equipment.
20. New opening to be made in level 1 stair lobby for proposed AOV windows. RAL 9011.
21. Proposed new full height windows to fit existing louvre S.O. RAL 9011.
22. New window on level 2. RAL 9011.
23. Vents where required at high level
24. Rooftop Lift enclosure aluminium rainscreen cladding colour RAL 3004.

ARCHITECTURAL EMPORIUM Ltd
www.architectural-emporium.co.uk / mail@architectural-emporium.co.uk
87 Kempston St, Liverpool, L3 8HE / +44 (0)151 363 0000

DRAWING STATUS	PLANNING		
PROPERTY TITLE			
UPRN		DFE NO.	
010090241040		-	
PROJECT TITLE	Wythenshawe Civic Centre		
DRAWING TITLE	Proposed Elevation 02 - Hale Top		
JOB NO.	FIRST ISSUE	REV DATE	REV
601	16/12/2024	03/06/2026	P11
REV	REV NOTE		
P11	RAL colours confirmed.		
SCALE	AUTHOR	CHECKED BY	APPROVED BY
1:200 @ A3	SE	AA	LC

DRAWING NO.
45848 - AE - 01 - XX - D - A - 3105 - S3 - P11