
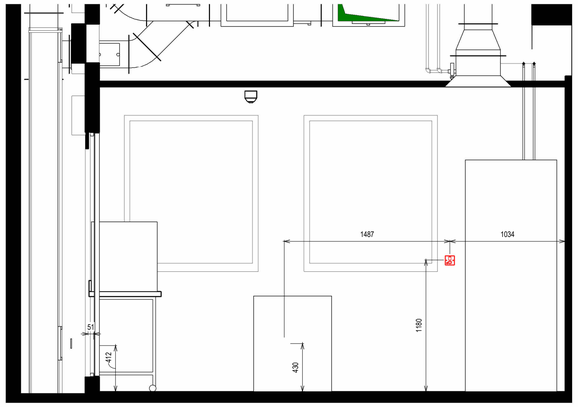



ELEVATION A

1 : 25

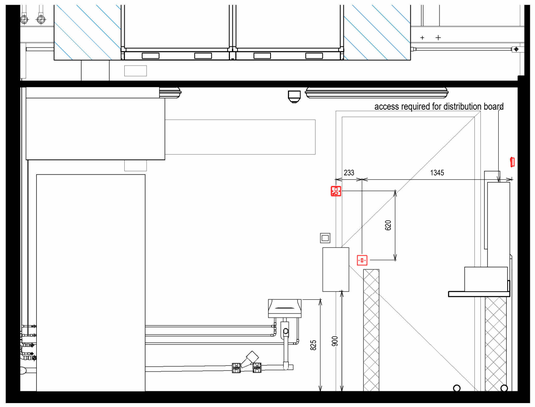

ELEVATION C

1 : 25

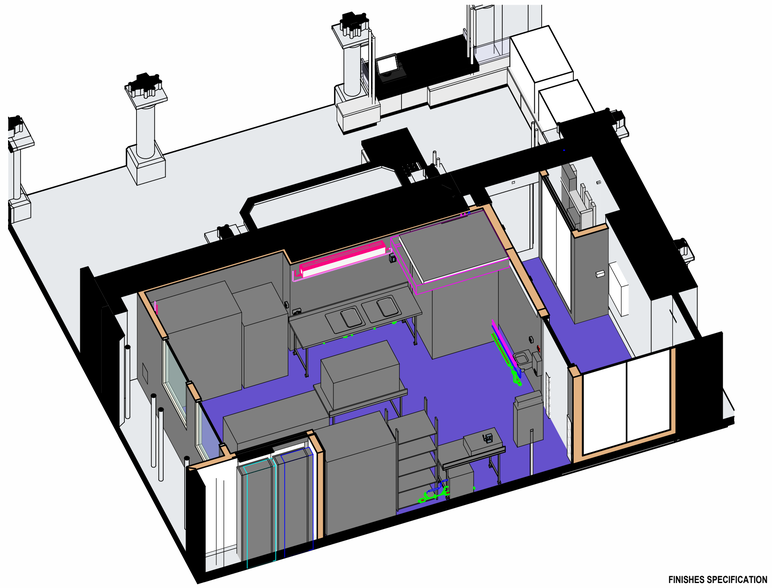

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTH-TYL-TH-DWG-Y SERIES DRAWINGS & ALL OTHER CONSULTANTS DRAWINGS


FOR ADDITIONAL SPECIFICATION NOTES PLEASE REFER TO NBS DOCUMENT OTH-TYL-TH-ZZ-SPE-Y-0001

GENERAL

No dimensions to be scaled from this drawing. All given dimensions in millimetres. All dimensions to be checked by the Contractor prior to commencement of work on site.

All materials, goods and fittings to be used in strict accordance with the manufacturers instructions and recommendations.

This drawing to be read in conjunction with structural general arrangement details and all other consultants drawings.

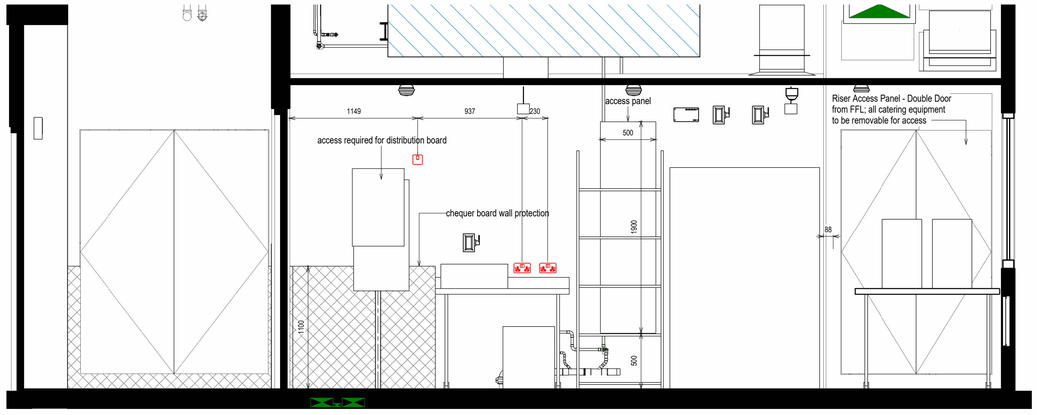

ELEVATION B


1 : 25

CATERING EQUIPMENT

All Benching to be mobile on castors with brake, except benching for sinks/water appliances.
Shelves to be provided to all benching as space allows.

ROOM-GF-003-***

Asset Reference	MCC Code	NRM Code	Description	Type Mark	Count
SAN-FIX-SNK	21.01.176.336.3	5.1.1.9.3	Sink 600x500mm with 2 sets of taps each: AJ-B 306L mixer & AJPR 30 ST prerinse. NBS N12 381	13	2
SAN-FIX-WDR	21.01.210.178	5.1.2.3	Dyson hand dryer Airblade V	21	1
SAN-FIX-SNK	21.01.176.336.5	5.1.1.9.5	Automatic wash hand basin WS3-KVS	22	1
CAT-EQP-TAP	04.01.193.192	5.2.1.45	Instanta UCB47T hot water	110	1
CAT-EQP-CTR	04.01.42.327.1	5.2.1.32.1	Fosters XR3H 3-door refrigerated prep counter with coved upstand	308	1
FFE-GEN-EQP	13.05.168.170.15	4.1.1.1.15	Movable Benching 1500x650mm NBS N12 311	314	1
CAT-EQP-CUB	04.01.45.189.2	5.2.1.21.2	Victor Hot Pass Gantry to sit on benching	351	1
CAT-EQP-DWR	04.01.55.85.2	5.2.1.10.2	Dishwasher Optima range OD1450A	352	1
FFE-GEN-EQP	13.05.168.170.15	4.1.1.1.15	1500x800 Benching for Hot Pass	354	1
FFE-GEN-EQP	13.05.168.170.15	4.1.1.1.16	1200x550 Benching for Instanta machine	355	1
CAT-EQP-ICE	04.01.113.199	5.2.1.22	Fosters Ice machine F202	357	1
FFE-GEN-FIX	13.05.83.170.11	4.1.1.1.11	Racking 780x600mm NBS N12 432	358	1
CAT-EQP-FRE	04.01.90.149.2	5.2.1.15.2	Fosters double door fridge	359	1
CAT-EQP-CKR	04.01.41.173.1	5.2.1.19.1	Panini Roller Grill Majestic FT	360	1
FFE-GEN-EQP	13.05.83.170.16	4.1.1.1.16	Bench unit 1500x700 for double sink NBS N12 311	362	1
CAT-EQP-MIC	04.01.134.255.1	5.2.1.26.1	Merrychef Eikon E2S SP (1W) Microwave	364	2
CAT-EQP-FRE	04.01.90.148.3	5.2.1.14.3	Polar upright freezer double G595	366	1

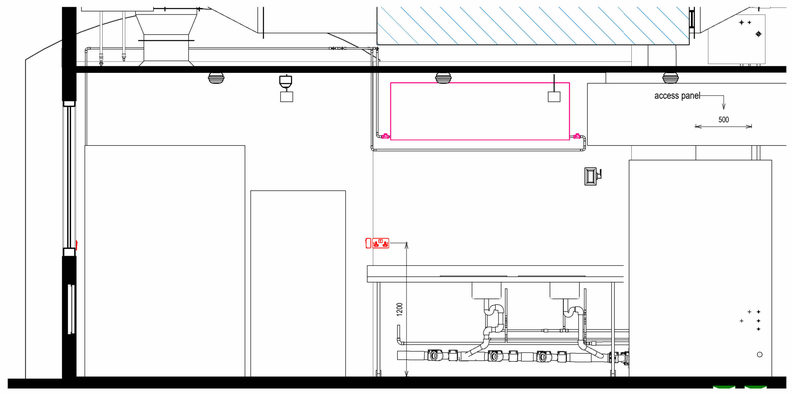


ELEVATION D

1 : 25

513

No fixed items to be positioned here

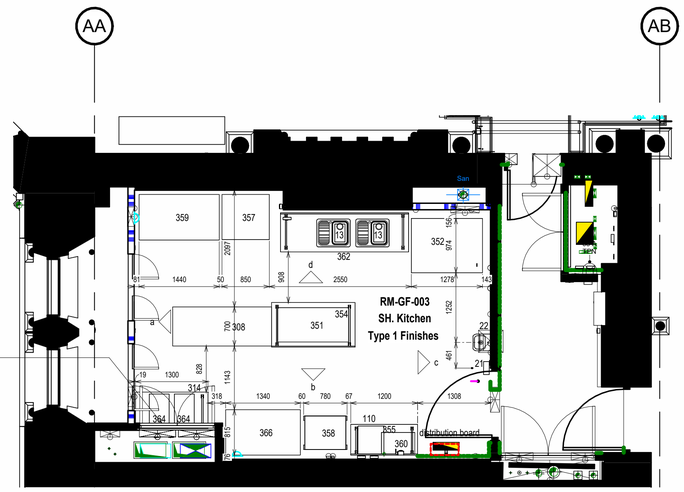

FLOOR PLAN

1 : 50

FINISHES SPECIFICATION

NOT FOR TENDER PRICING; FINISHES NOTED ARE TO BE PROVIDED BY THE OTH DELIVERY TEAM & TO BE CHECKED AGAINST THEIR DRGS

Type 1

Walls
2.5mm Altro Whiterock EU Grade Extruded PVC sheet in white satin fixed with Altrofix panel adhesive. Altro bonded to marine ply thickness to be determined by lining designer. All angles and corner bends to be thermoformed on site transition strip to coving required

Checkerplate wall protection to 1100mm height as indicated by dashed line

Floors
3mm Altro Stronghold 30 in 2m wide sheet vinyl fully adhered with epoxy adhesive

Skirting
Cove vinyl skirting to match vinyl floor

Ceiling
Armstrong metal ceiling Spring T tile with Spring T grid system in 600x 600mm module colour white

Type 2

Walls
Walls to be decorated with Mapei Silancolor Pittura Plus Paint (SD=0.06) and Mapei Silancolor Plus primer, all as per manufacturers recommendation.- colour to be white RAL 9010

Checkerplate wall protection to 1100mm height as indicated by dashed line

Floors
3mm Altro Stronghold 30 in 2m wide sheet vinyl fully adhered with epoxy adhesive

Skirting
Cove vinyl skirting to match vinyl floor

Ceiling
For the following rooms:
- RM-01-007; RM-01-025; RM-01-039
Armstrong metal ceiling Spring T tile with Spring T grid system in 600x 600mm module colour white
No suspended ceiling for all other rooms, paintwork only, as per wall paint.

Type 3

Heritage finishes only
allowance to be made for racking fixing points

KEY

- 200mm allowance for WhiteRoc and framing
- Waste connection to grease trap seperator
- SVP stack connection

ELECTRICAL FIXTURES KEY

- 2gang switched socket outlet
- switched spur outlet
- single switched socket outlet
- unswitched socket outlet
- light switch
- TP&N - SP&N Isolators (various dimensions)

NOTE
Key symbols are only indicative, for Elecrical items, details, specs and dimensions, please refer to M&E consultant drawings and catering supplier's drawings.

No.	Description	Prep	Chk	Date
C03	general update	HT		07.05.25
C02	updates after coordination and site meeting	HT		29.05.24
C01	as noted	HT		27.03.24
T2	Drawing updated as noted	FT		21.08.21

© Taylor Design 2018

Do not scale this drawing
All given dimensions are in millimetres
Architect to be notified of discrepancies in figured dimensions
Contractors must check all dimensions from site

This drawing is copyright and is for use on this site only

Project
Manchester Central Town Hall Kitchens
Albert Square, Manchester, M60 2LA

Title
OTH-TYL-TH-GF-DWG-Y-07003
SH Kitchen

Job No.	Drawing No.	Revision
5870	7003	C03

Scale @ A1: As indicated

Status: **CONSTRUCTION**

Auth: HT Date: Sep_2020

TAYLORDESIGN architects

Nirrolffe House, Station Road, Wilmslow, Cheshire, SK9 1BU

t: 01625 528181
e: office@taylor-design.co.uk
w: www.taylor-design.co.uk

2500 mm 5000 mm 7500 mm 10000 mm