

VISTA TRUST CORPORATION (UK) LTD - JLL | 31 BOOTH STREET | RECEPTION

DEMOLITIONS LAYOUT

This drawing is the property of Bluesky Design Interiors Limited and must not be copied or otherwise reproduced. All dimensions must be checked on site before commencing work. This drawing was produced using AutoCAD 2025.

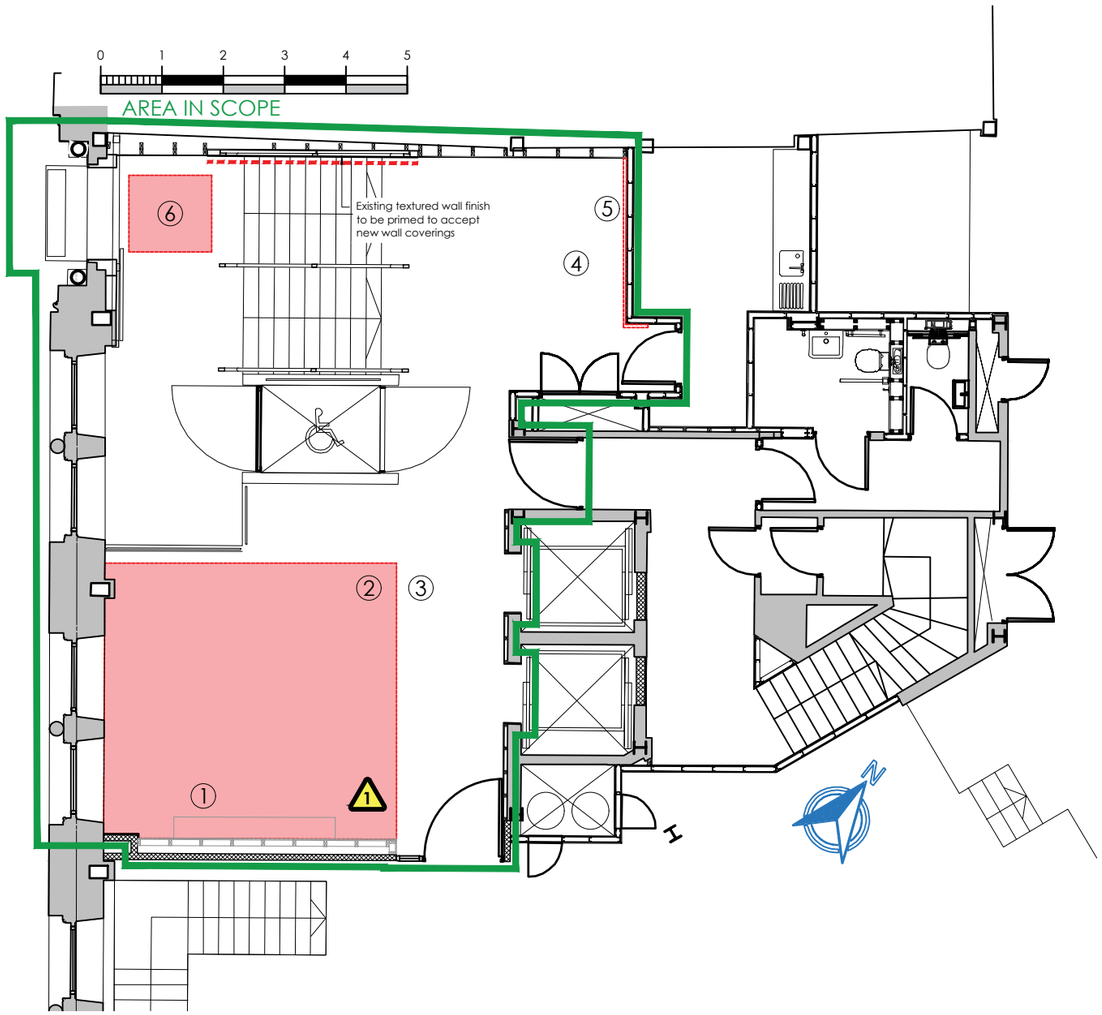

DEMOLITIONS LAYOUT

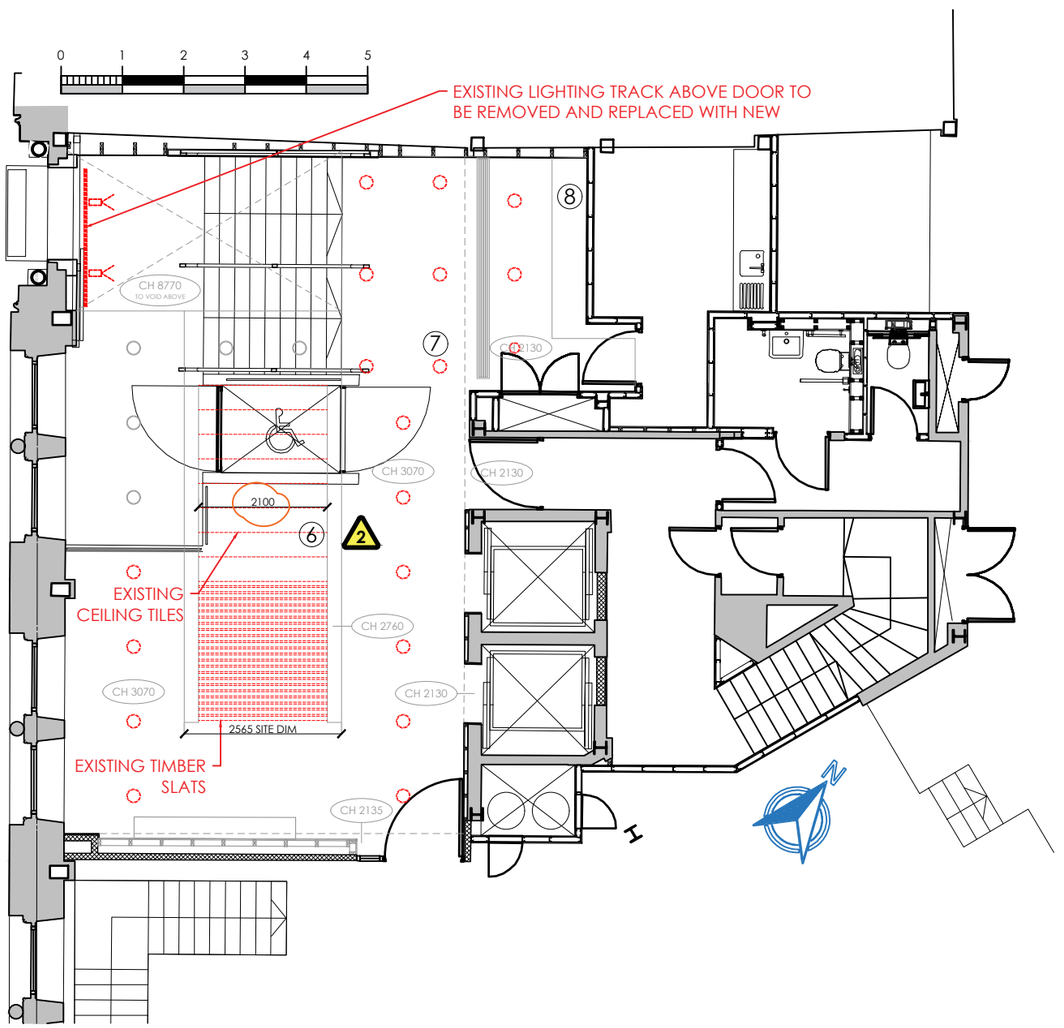

CEILING DEMOLITIONS LAYOUT

DEMOLITIONS KEY

1. Remove existing joinery and mirrors from recess and make good adjoining surfaces.
2. Red hatch indicates area of existing colour floor tiles to be removed. Make good subfloor to accept new floor finishes.
3. Retain existing grey large format floor tiles and ensure neat edge where area of colour floor tiles have been removed.
4. Retain existing reception desk.
5. Remove existing bronze square blocks from rear wall behind reception desk and make good existing timber veneer wall finish.
6. Existing entrance barrier matting to be removed, surfaces to made good to accept new like for like matting.
6. Existing ceiling MF bulkhead margin to be retained. Timber slats and existing ceiling tiles to be removed and associated surfaces to be made good to accept new de-mountable ceiling panels.
7. Where indicated in red dashed line, existing recessed downlights to be removed and associated surfaces to be made good ready to accept new lighting. Contractor to check for dimensional compatibility with proposed new lighting on like for like basis (circumference / depth of void etc).
8. Existing light wash to wall behind reception desk to be retained.

Hazard identification

1 Large mirrors - care taken to reduce risk of shattering

2 Working at height - risk of falling

Rev	Date	Description	By
D	28.08.26	Construction Issue	CB
C	03.07.26	Heritage Issue	FC
B	12.06.26	No. 6 note added for entrance mat. Track lights above door to be removed. Bulkhead ceiling size amended to suit site check.	CB
A	01.06.26	For tender	CB

Client	**VISTA TRUST CORPORATION (UK) LTD - JLL**
Project	**RECEPTION REFURBISHMENT**
Address	**31 BOOTH STREET, MANCHESTER**
Drawing Title	**DEMOLITIONS LAYOUT**

Date **20.05.26** Scale **1:100@A3** By **CB**

Drawing No **1394-0G-DE-01(D)** Status **CONSTRUCTION**

bluesky Design INTERIORS LIMITED

Studio 1 | 169 High Street
Boston Spa | Leeds | LS23 6BH
01937 845 399
www.blueskydesigninteriors.co.uk