
(807) Amberley Drive
External Building Finishes



1. Brickwork & Mortar

1. Wienerberger Woodland mixture 8356 - https://www.wienerberger.co.uk/product-range/bricks/woodland-mixture.html
2. Brick feature coursing to architects drawings – Generally projecting coursing corbelled out by 15mm.
3. All superstructure mortar will be natural coloured.

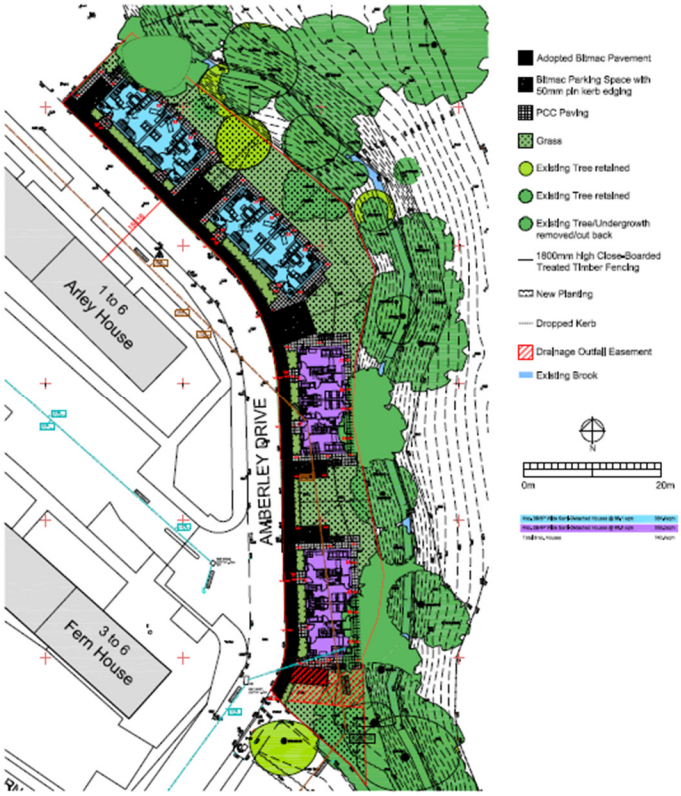

(807) Amberley Drive
External Building Finishes


2. Roofing – Marley Edgemere Concrete Roof Tiles Colour:- Anthracite



3. Roofline – Fascia's /Soffits / Bargeboards : Pvcu : Ral 7016 - Anthracite





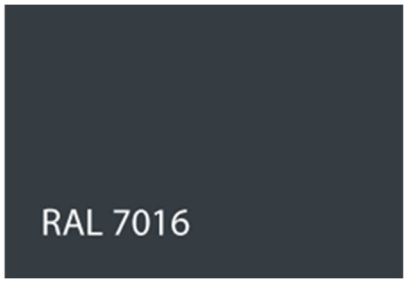

(807) Amberley Drive
External Building Finishes

4. Gutters / Rainwater Pipes – Black Aluminium Deepflow



5. Windows / External private entrance Doors - Pvcu Ral 7016 – Anthracite Externally / White Internally



Window / External Communal Entrance Door – Powder coated

(807) Amberley Drive
External Building Finishes


Window Hardware

White Interior Handles



Obscure Glazing to Bathrooms

Stippolyte – Privacy Level 4

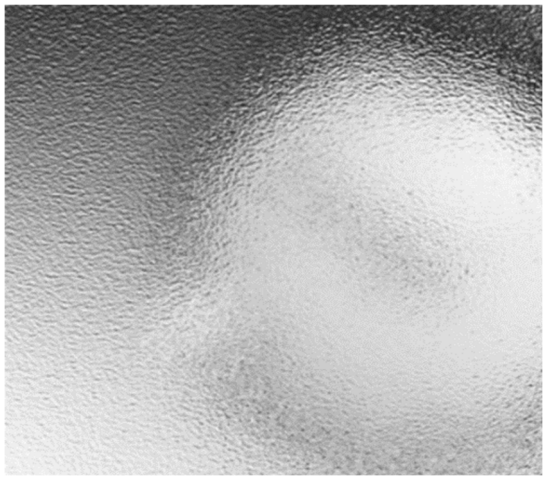


Front Doors / Rear Doors

Front door to be composite, rear door to be UPVC. Externally RAL 7016 dark grey, internally white



Precedent Image

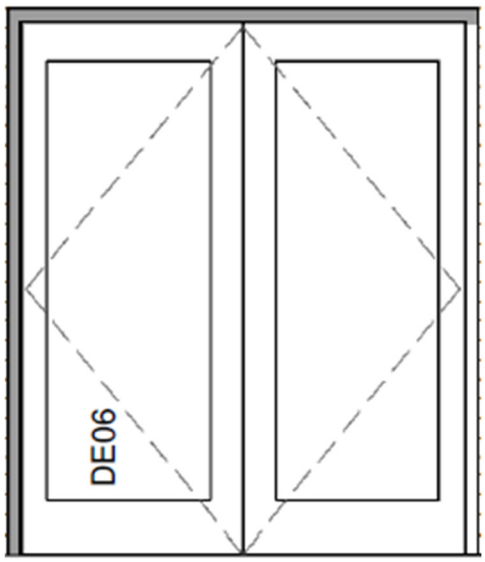

(807) Amberley Drive
External Building Finishes

External Areas

Driveways and private road to be tarmac finish



Garden areas and paths (600mm x 600mm natural precast concrete flags)

