

Air Boss® T2002 Specifications



T2002 Blowerless


Dimensions	25" L x 43" W x 21" H
Installation	Suspended, Wall, Frame Or Duct Mounting
Unit Weight	148 Lbs., Shipping Wt. 221 Lbs.
Air Volume	Single Pass: 1,350 - 1,650 CFM Double Pass: 1,650 - 2,900 CFM Triple Pass: 2,900 - 3,750 CFM
Controls	On/Off Switch with Indicating Light
Pre-Filter (2) Required	Aluminum Mesh Standard 18.4" L x 18.4" W x .88" D Optional Impinger
Primary Filter (2) Required	Standard Forever Filter - Electronic Ionizer/Collector Cell Optional Bag Filter Optional Absorber Module
After Filter (2) Required	Optional Disposable Charcoal After Filter 18.4" W x 18.4" H x .88" D
Power Supply	High Frequency Solid State Design
Efficiency	See chart on page 3
General	Multiple Units can be Joined Together for Increased Volume or Higher Efficiency

Standard Specifications for Each Unit


Cabinet	16 Gauge Welded Galvanized Steel
Finish	Blue Epoxy Powder Coat
Air Flow	Horizontal — Standard Right to Left (Left to Right Option)
Accessories	Optional Source Capture Plenum Optional Brass Drain Fitting

Note: Units can be stacked in configurations up to 16000 CFM.


Top View

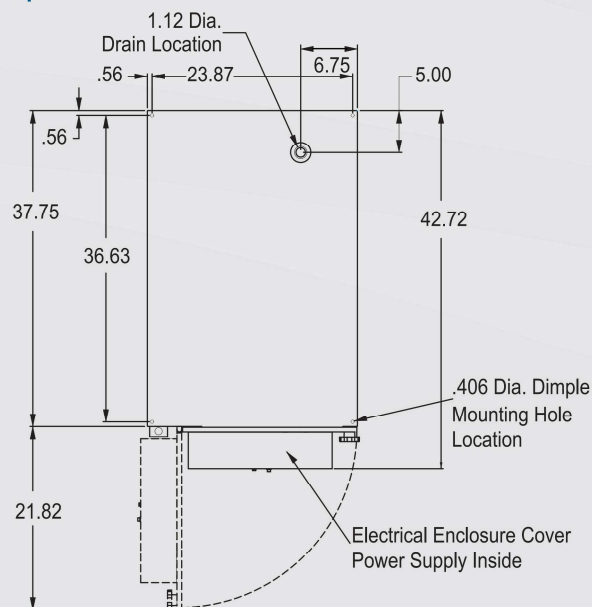

Discharge End

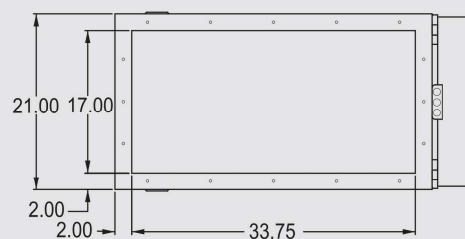

Front View

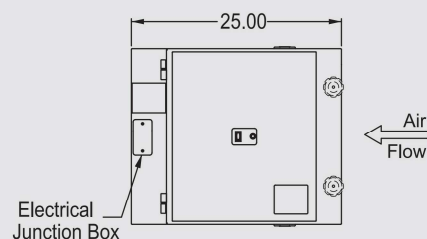

Intake End

