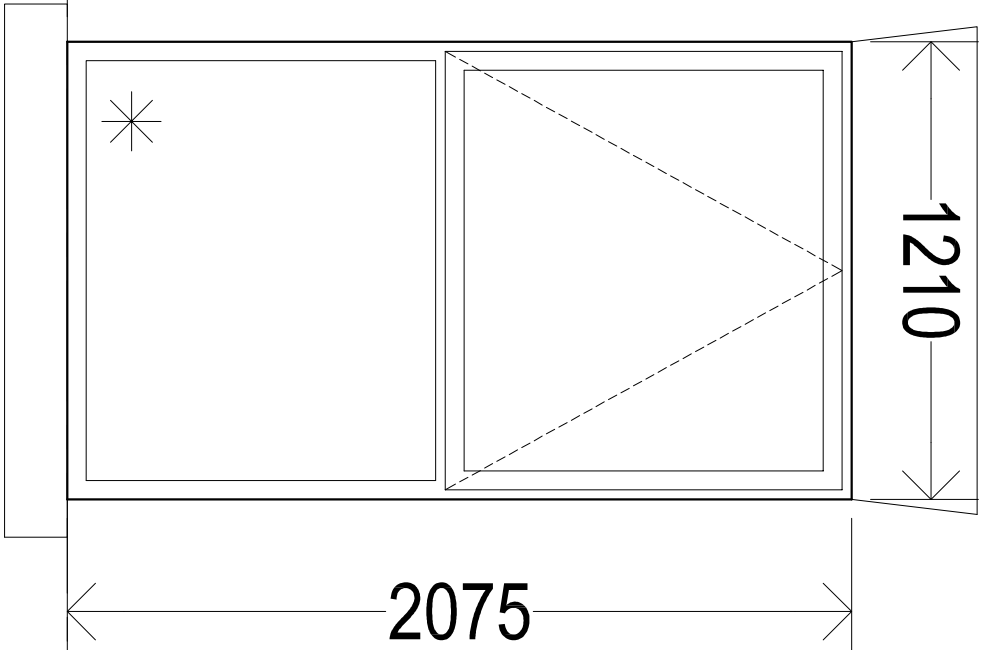
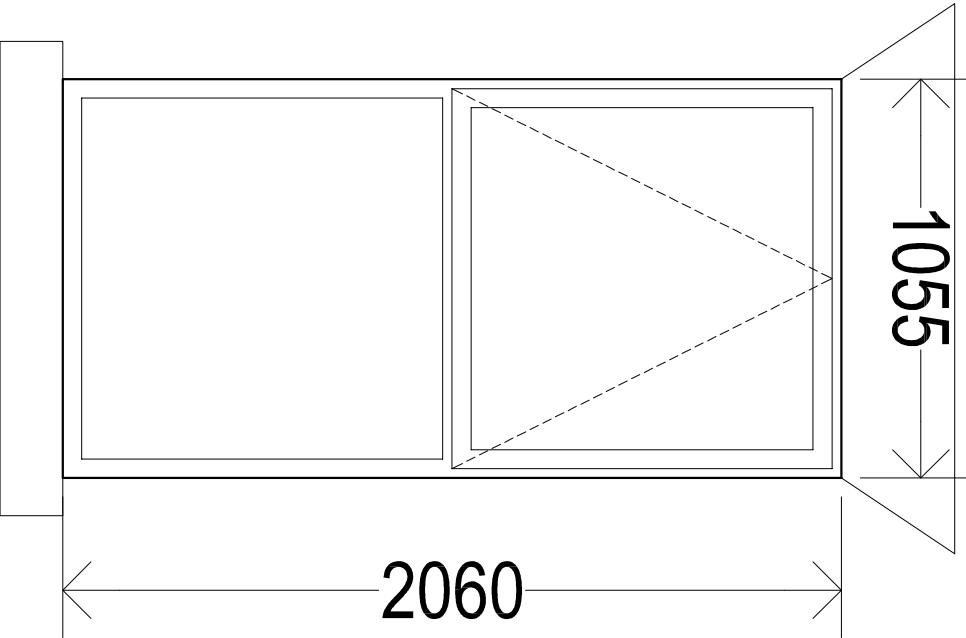
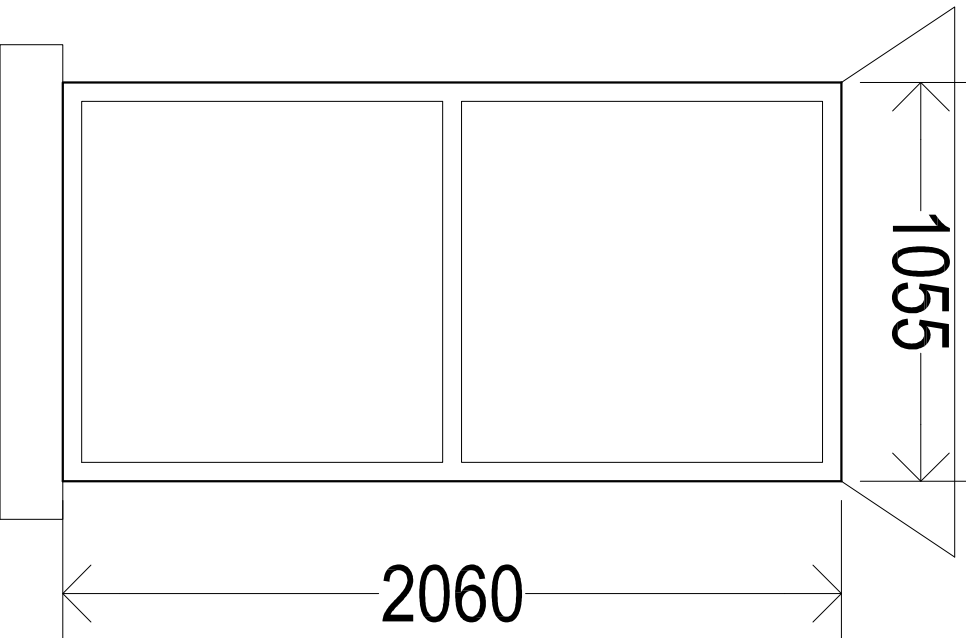
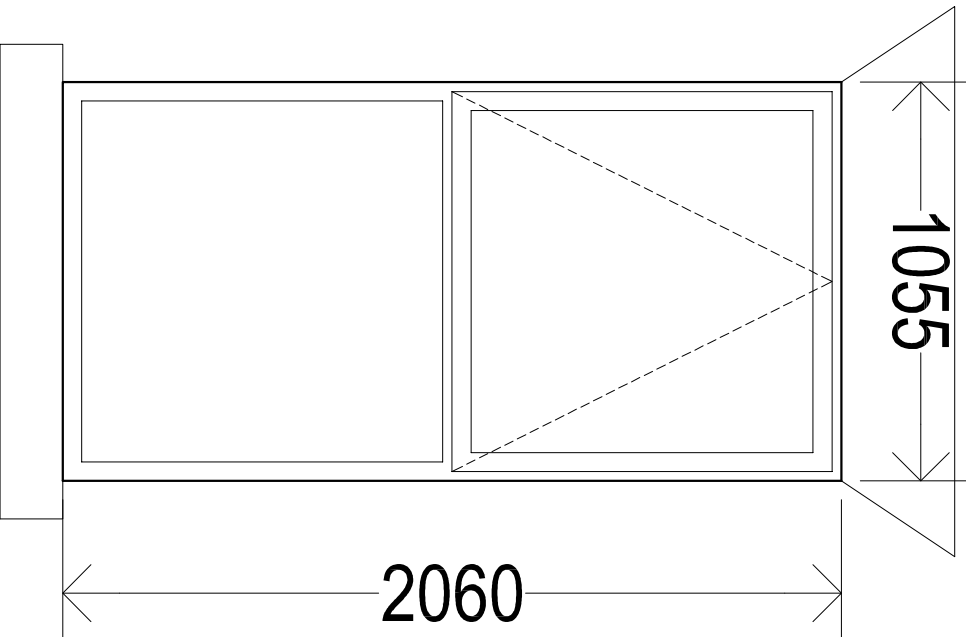
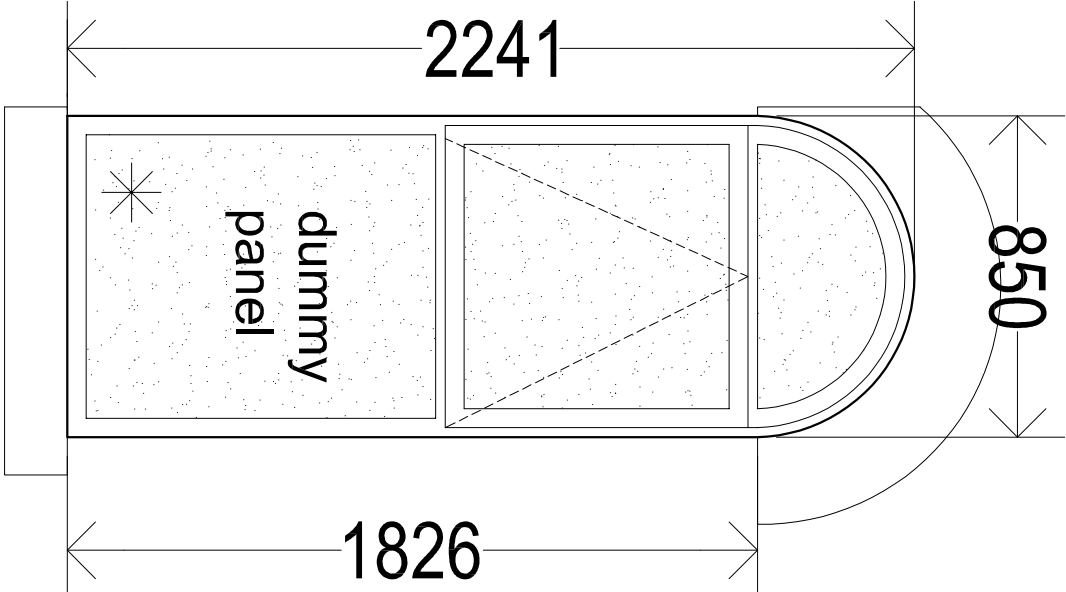
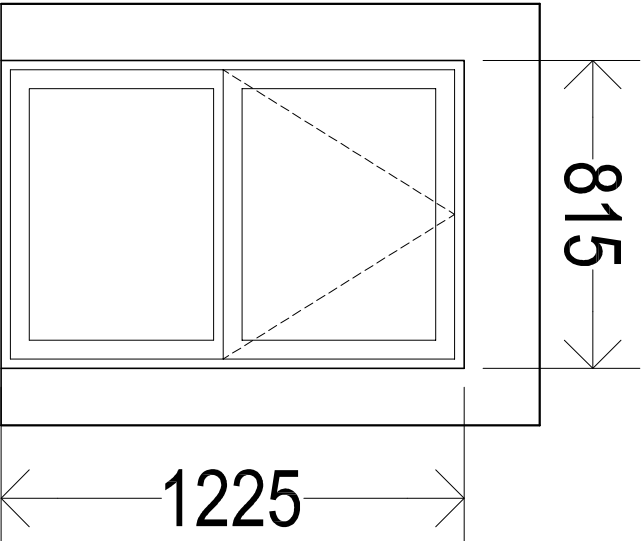
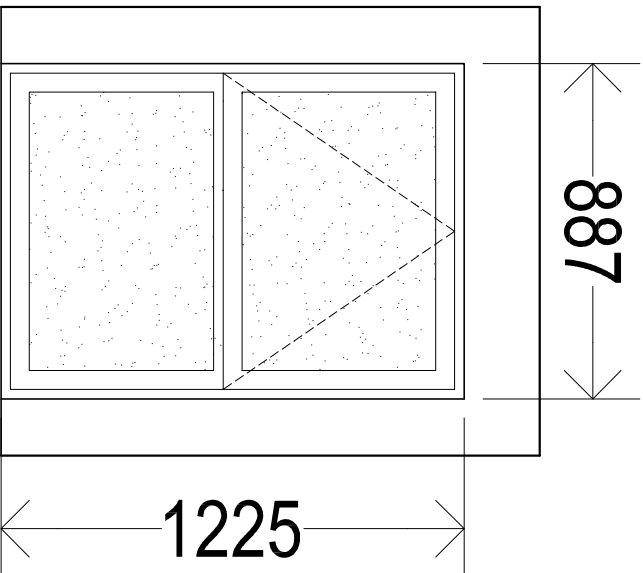
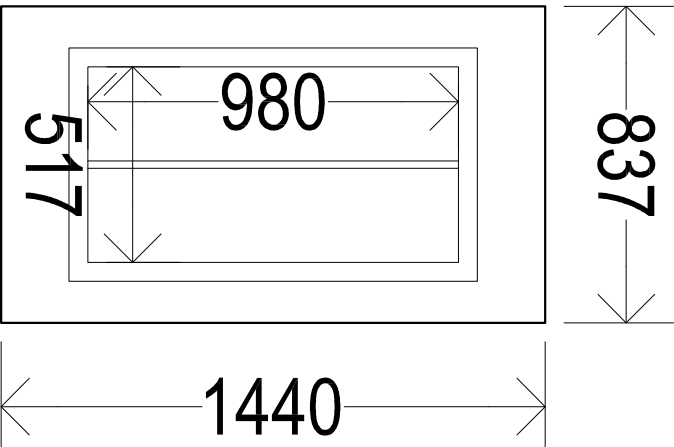
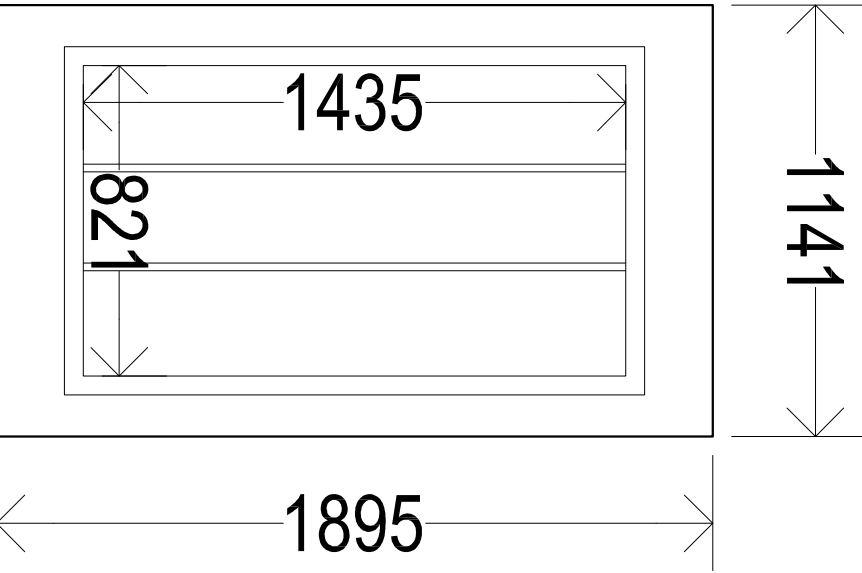


- NOTES
- Design & drawings are copyright of Hive Architects Studio Ltd. and written permission must be obtained before duplication
 - Do not scale from drawing or derive dimensions from digital forms
 - All dimensions are to be checked before commencing work or placing orders
 - Any discrepancy found between information herein and that given elsewhere or found on site shall be reported in writing to the architect immediately
 - Client and Contractor to study and understand the contents of drawings and approvals relating to the project as no claim arising out of the failure to do so will be entertained.
 - Conditions stated in either the current title deed or council approvals should be complied with to the satisfaction of the local authority or any other relevant party.
 - All applicable health and safety requirements to be complied with during and after construction
 - Drawing to be read in conjunction with specifications, notes and structural calculations.

				
WF02 New	WF03 New Double glazed 10/12/6 or better with Passivent frame ventilation TVAL dB 800	WF04 New Double glazed 10/12/6 or better with Passivent frame ventilation TVAL dB 800	WF05 New Double glazed 10/12/6 or better with Passivent frame ventilation TVAL dB 800	WF06 New
				
WS01 New Dormer	WS02 New Dormer	RL01, RL05 & RL06 New Rooflight Ref: CR10-2	RL02, RL03 & RL04 New Rooflight Ref: CR15-3	

IMPORTANT NOTES: Read in conjunction with other relevant information: floor plans, elevations, sections, door schedule, details and specification
All windows shown viewed from outside. All units open outwards unless stated otherwise.

Middle or point (jc1) of dashed lines indicates hinged side of opening light

All dimensions shown are indicative and to be checked on site by contractor prior to placing or accepting any order


Contractor must allow for adequate tolerance within built openings appropriate for the units being ordered to achieve a good fitting and able to be properly sealed

Purge ventilation required to windows at 1/20th floor area

Secure Door sets and Secure Windows to PAS 24:2012 to satisfy A.D.Q and be 'Secured by Design'.

Openings to satisfy all necessary A.D & BS


* = Toughened glazing - note is for guidance, contractor should check and confirm all glazing fully in accordance with A.D.K. & BS 6206




Obscured glazing



Clear glazing

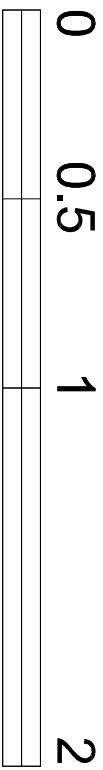

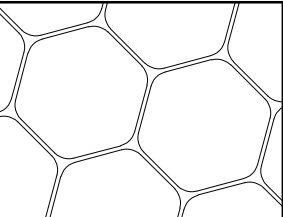	Hive Architects Studio Ltd. Beck House, 77a King Street, Knutstord, WA16 6DX T: 01565 748050 E: hello@hivearchitects.co.uk W: www.hivearchitects.co.uk Registered in England, 0735 7186
Project	Extension & Alterations at 481-485 Wilmslow Road, Manchester, M20 4AN
Project Ref	184-01
Drawing Title	Window Schedule
Drawing no.	203
Scale	STATED @ A1
Date	09/07/19
Drawn	JC
Stage	Technical Design
Revision	