


REVISED PLAN

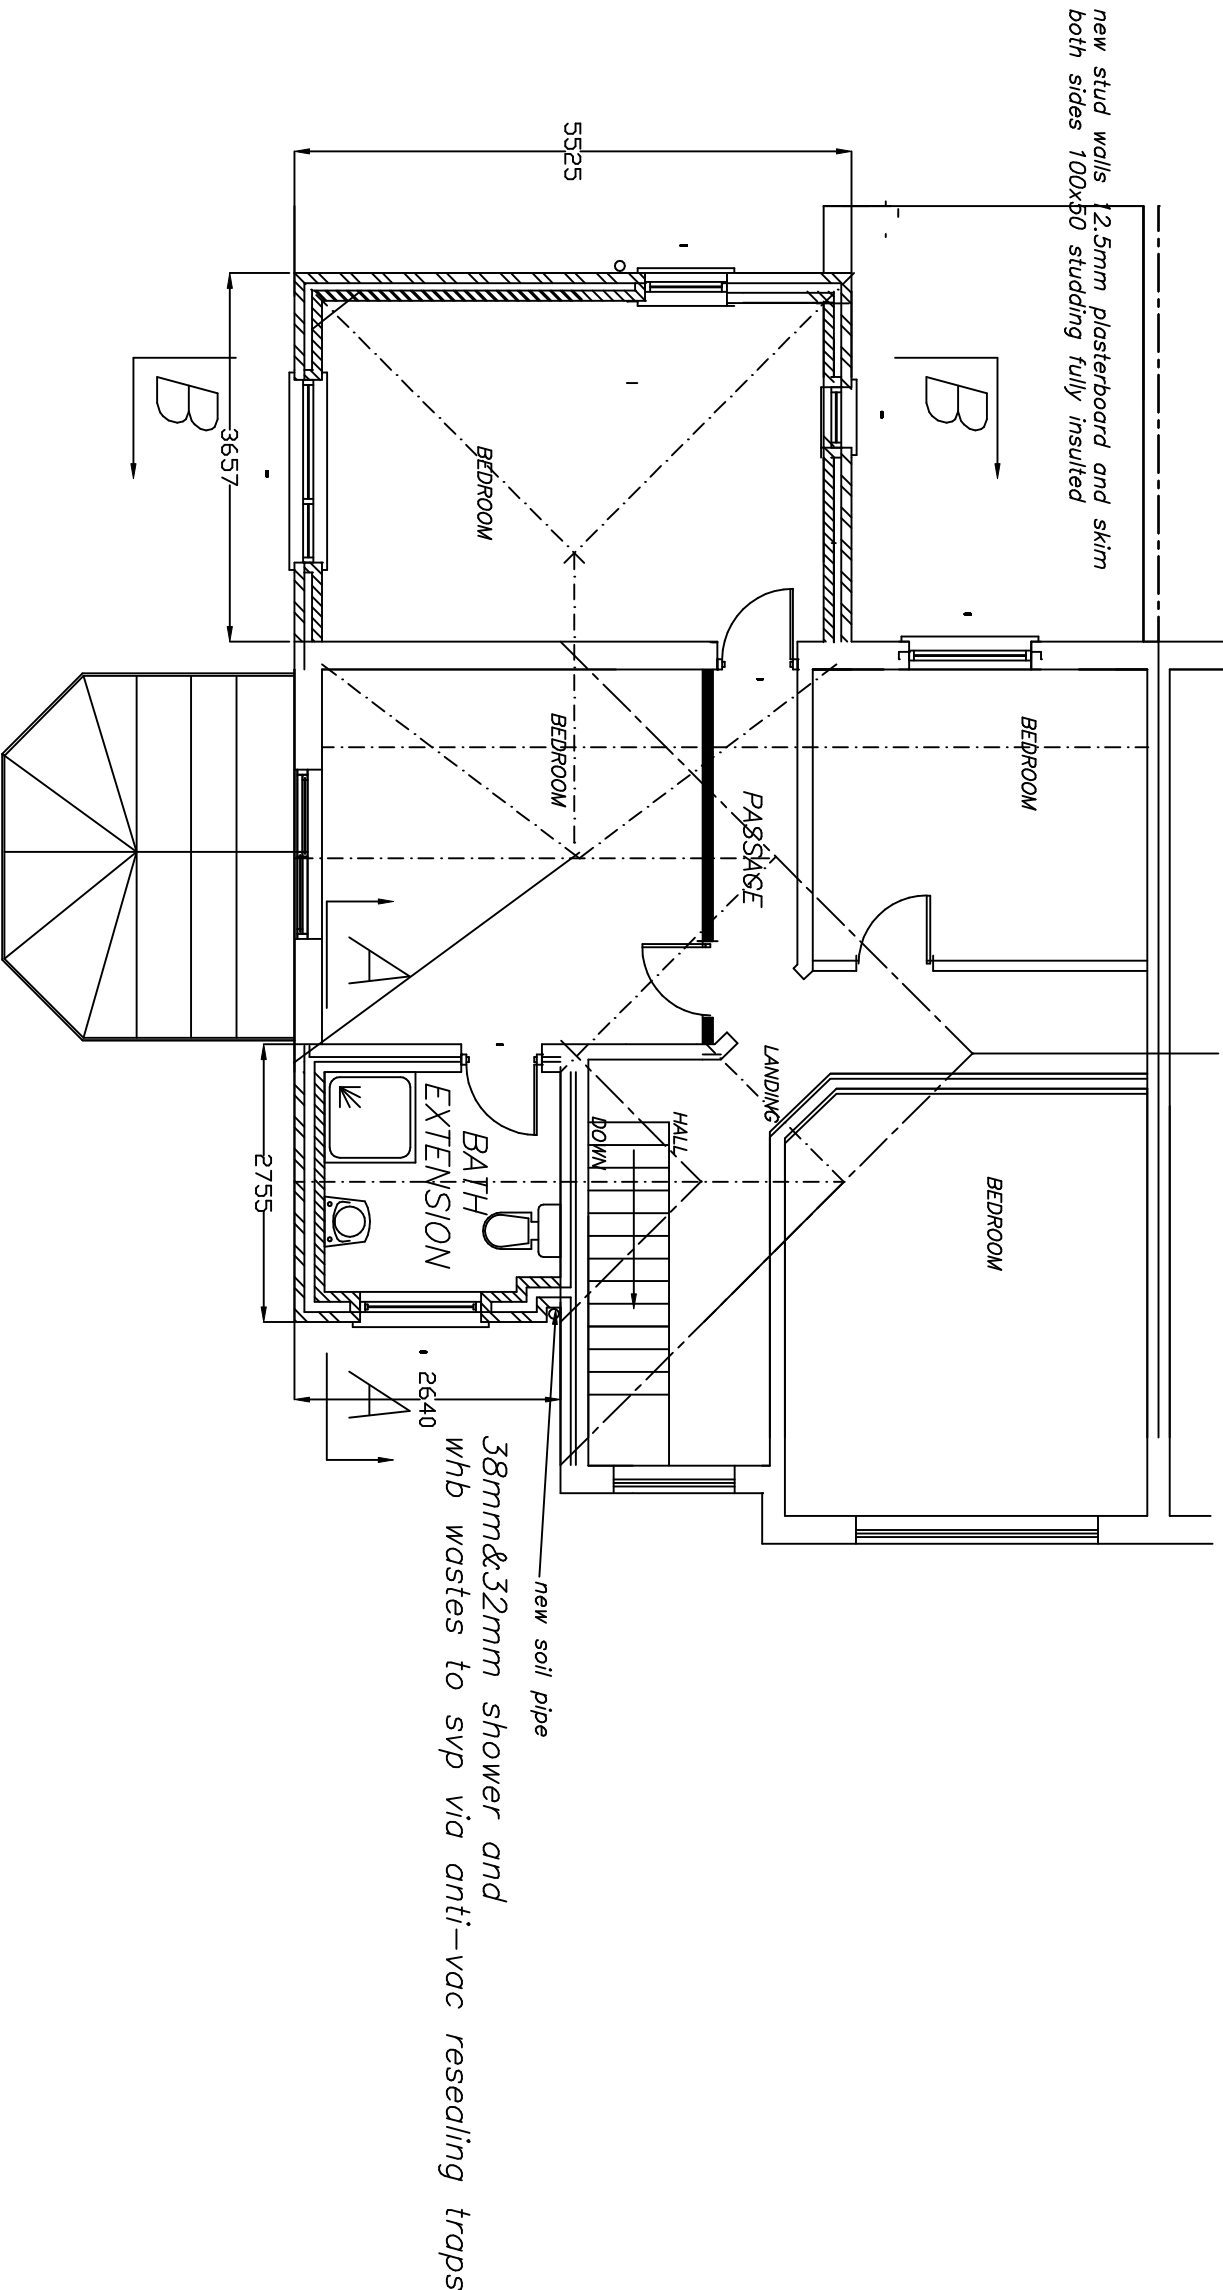

PROPOSED FIRST FLOOR PLAN

NO WORK TO COMMENCE BEFORE PLANNING PERMISSIONS REQUIRED HAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
LES FIEY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO LES FIEY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORTANT THAT THE CLIENT
SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE
THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED ALL PROVISIONS OF THE PARTY WALL ACT 1996
(WHERE NECESSARY TO BE ADHERED TO.


PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULEIMAN AMJAD ALI

SCALE:- 1.75 DATE:-AUG'16


BUILDING
DESIGN CONSULTANTS

8, GLASSON WALK,
CHADDERTON,
OLDHAM, OL9 9DR
TEL&FAX: 0161-633-5057

REVISED PLAN

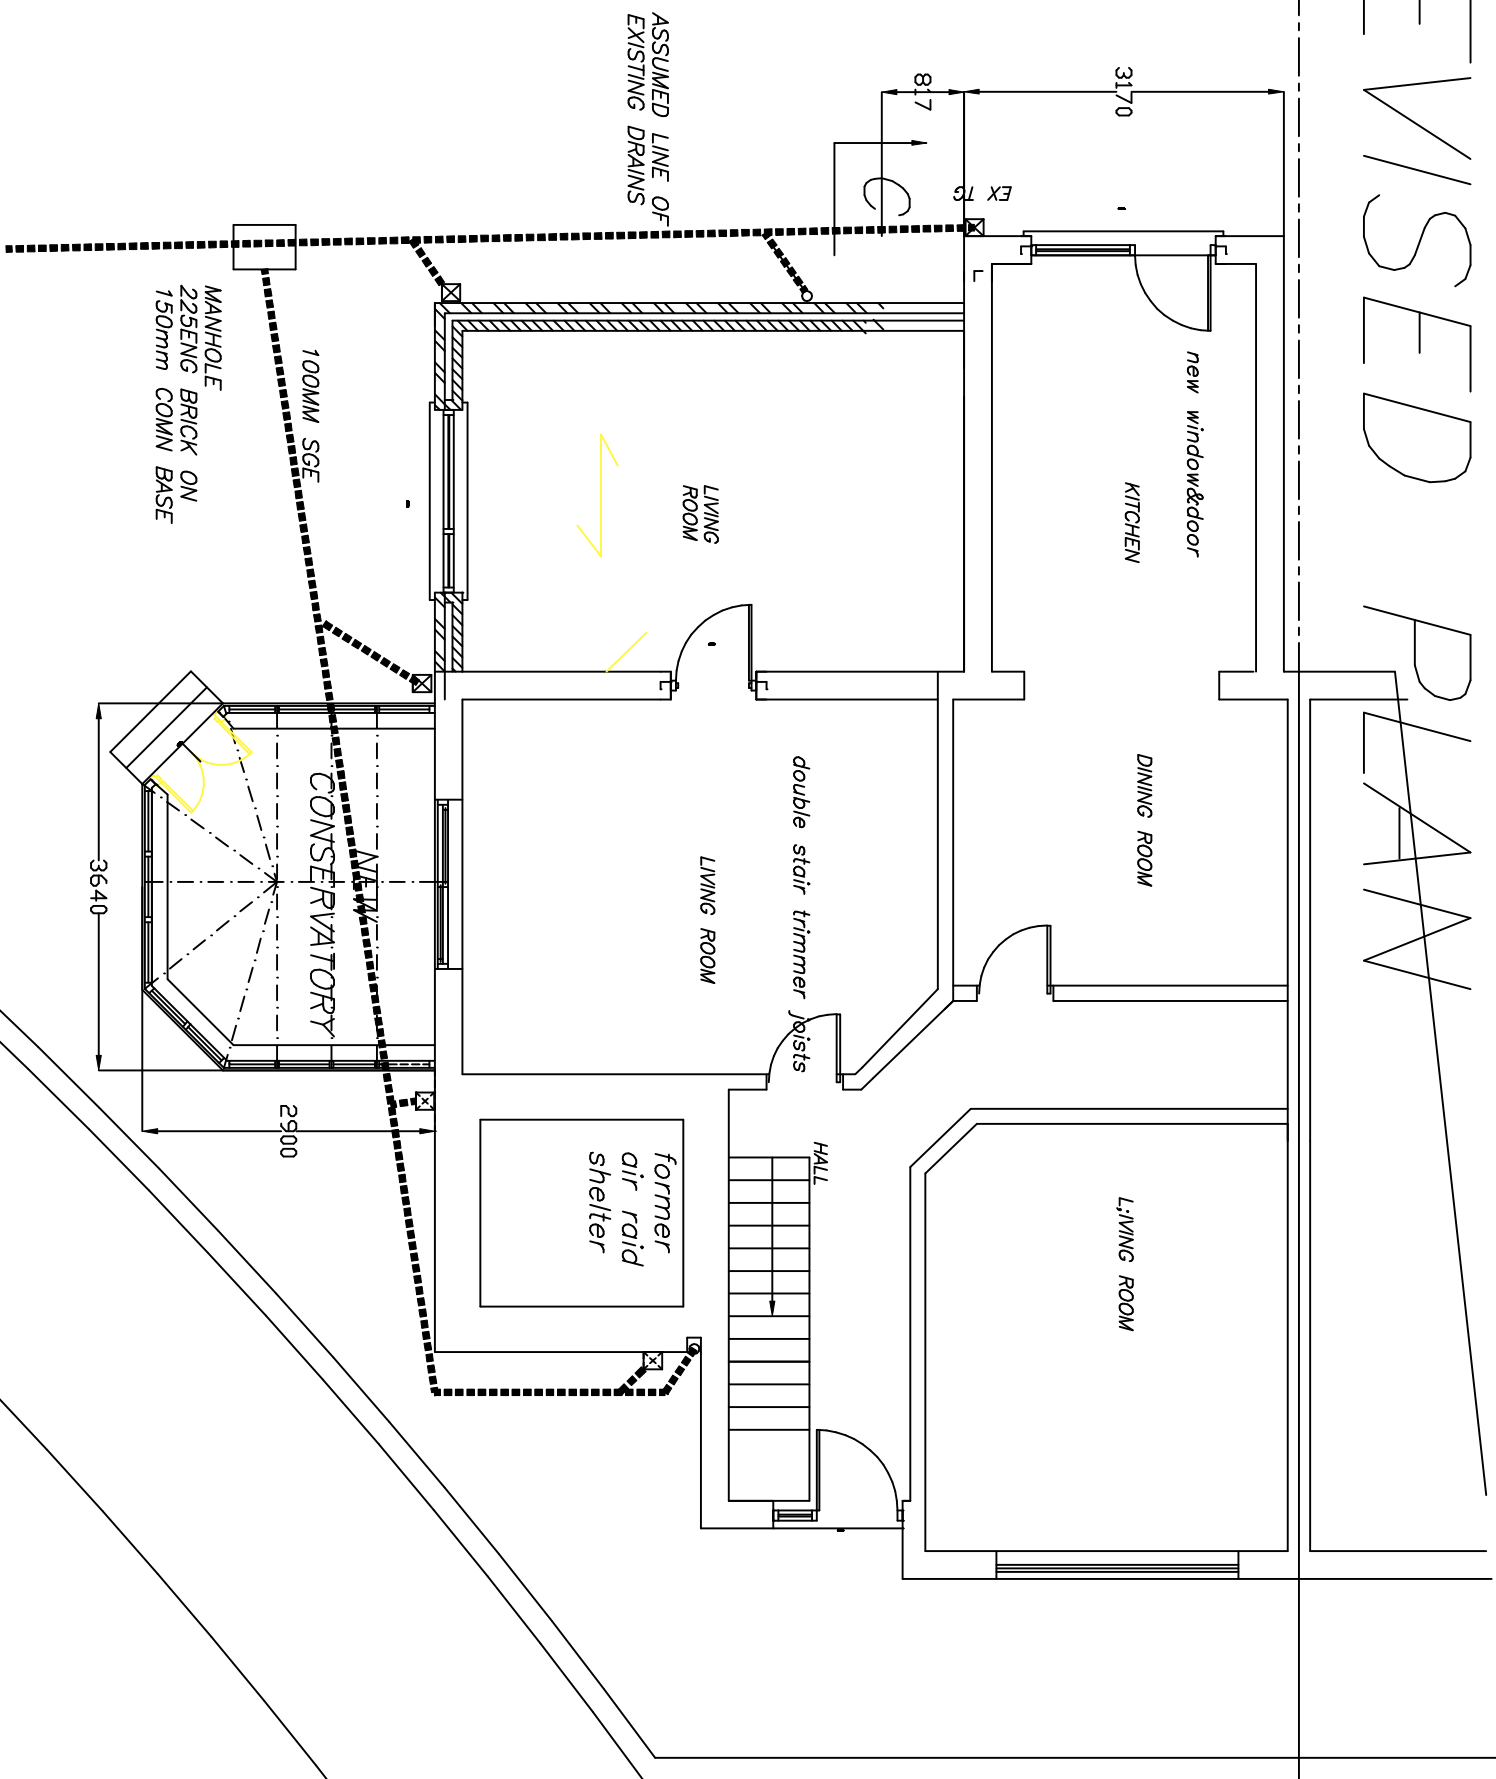

PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULIEMAN AMJAD ALI


SCALE:- 1.75 DATE:-AUG'16




iesfoey
BUILDING
DESIGN CONSULTANTS

8, GLASSON WALK,
CHADDERTON,
OLDHAM, OL9 9DR
TEL&FAX: 0161-633-5057


REVISED PLAN

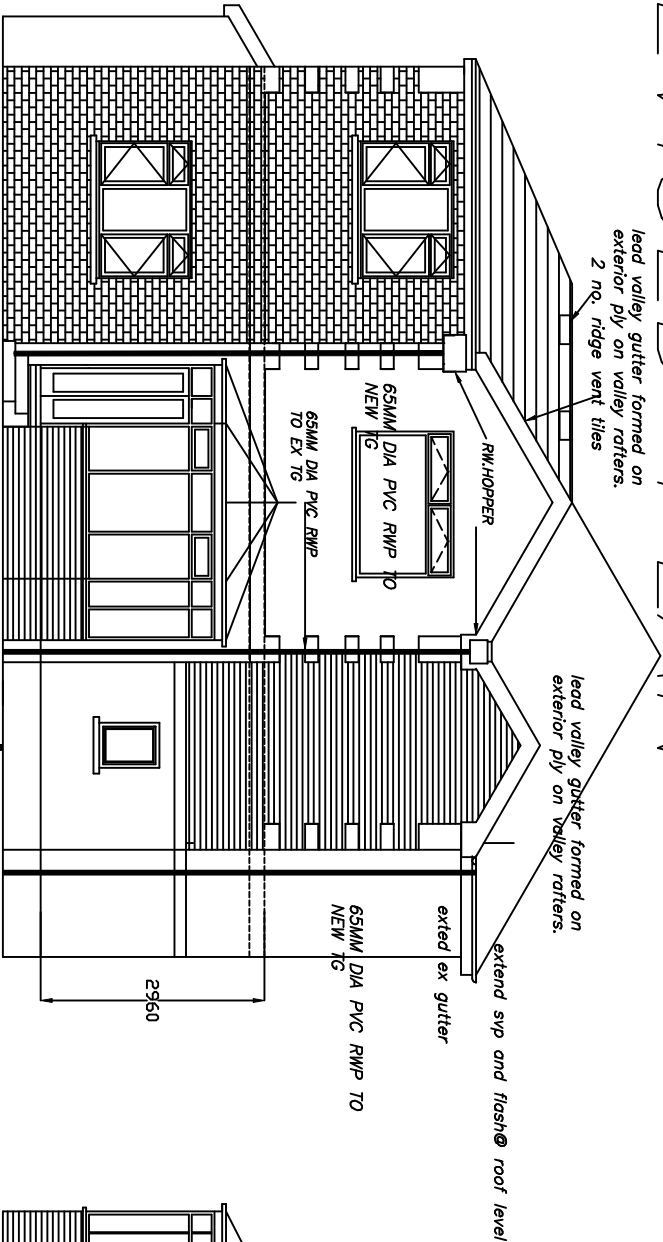


PROPOSED SIDE ELEV.,
ex founds checked for suitability to support additional loading.

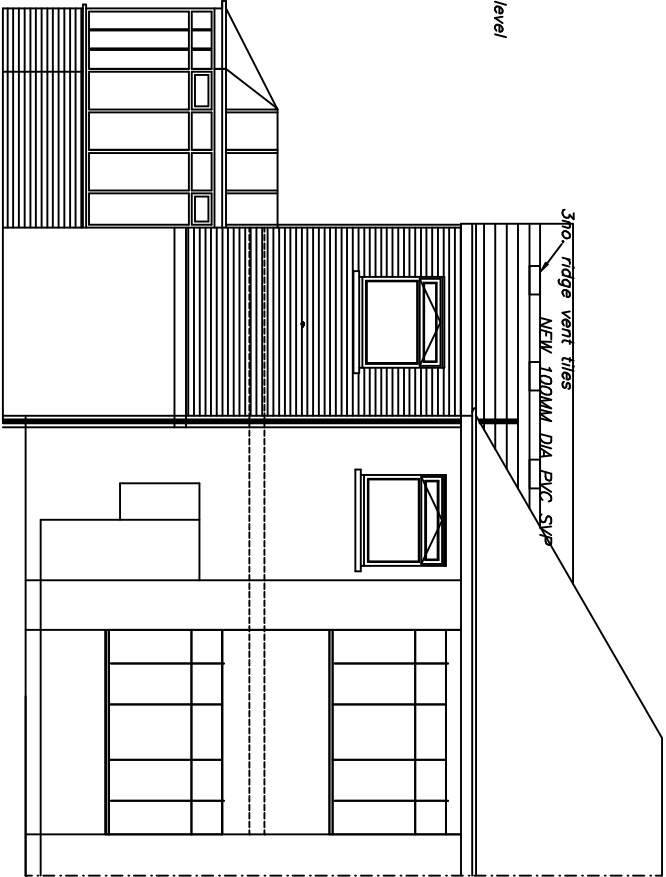


PROPOSED FRONT ELEV.

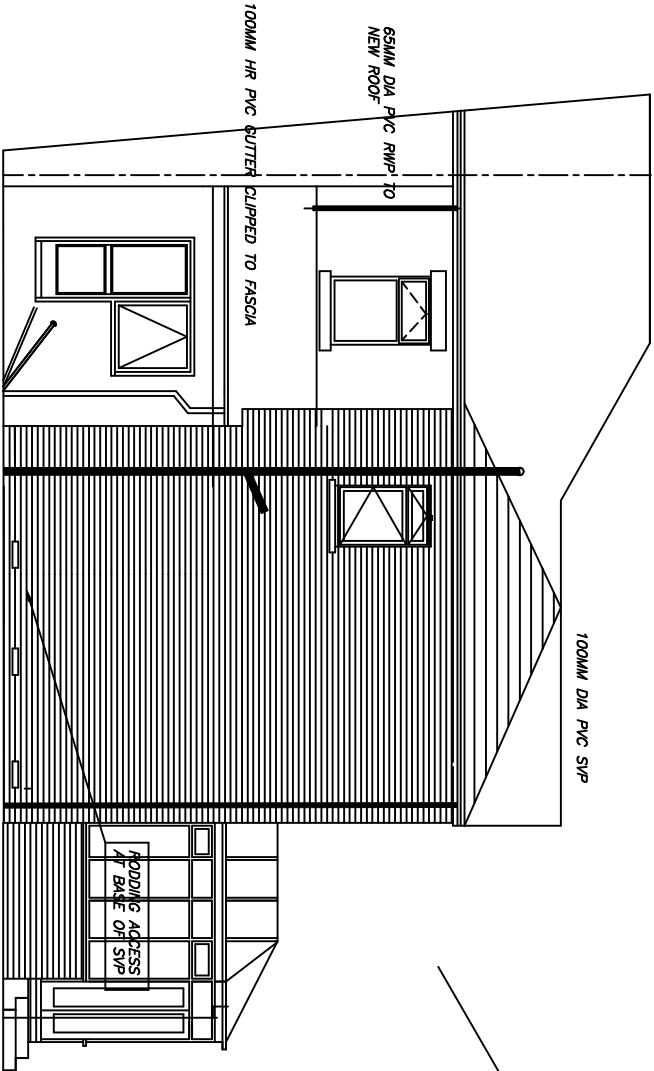

PROPOSED REAR ELEV.

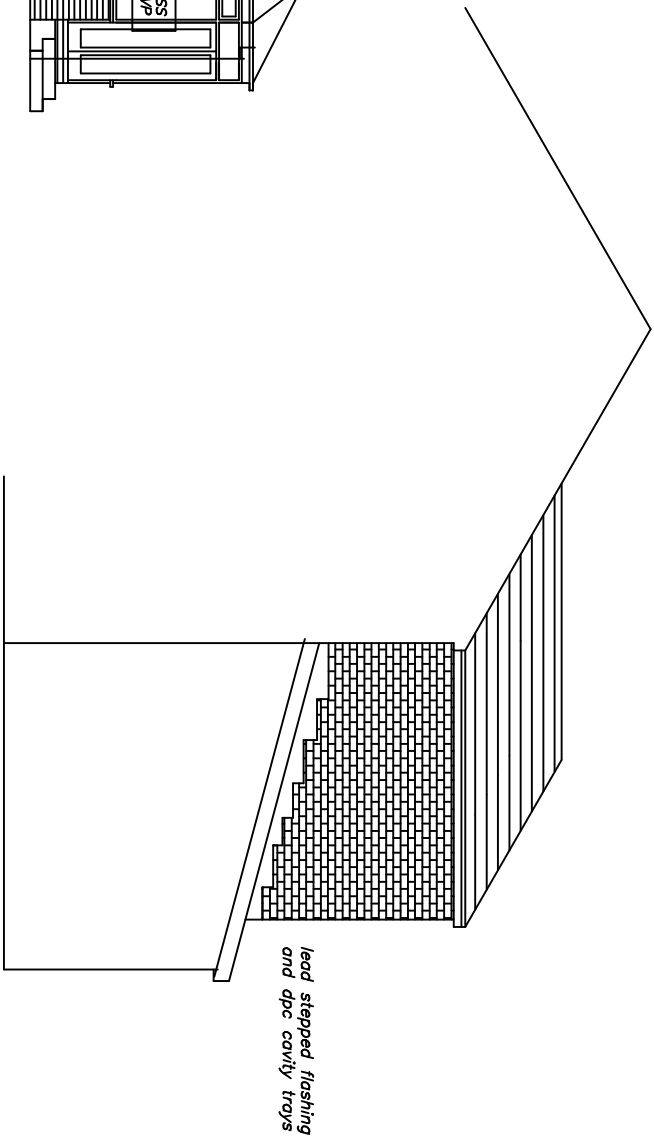

PROPOSED REAR/SIDE ELEV.

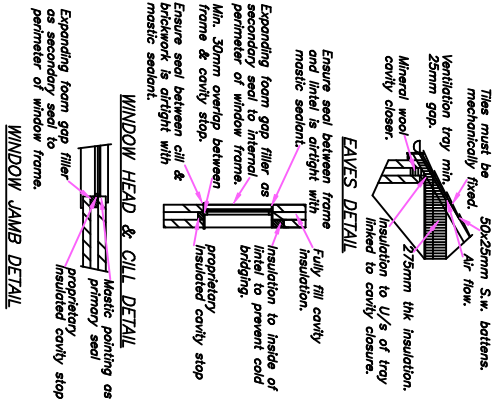


PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULEIMAN AMJAD ALI

SCALE:— 1.100 DATE:-APRIL '06

iesfoey
BUILDING
DESIGN CONSULTANTS

8,GLASSON WALK,
CHADDERTON,
OLDHAM,OL9 9DR
TEL&FAX: 0161—633—5057

NO WORK TO COMMENCE BEFORE PLANNING PERMISSIONS REQUIRED HAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
LET'S FEEY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO LET'S FEEY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORANT THAT THE CLIENT
SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE
THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED ALL PROVISIONS OF THE PARTY WALL ACT 1966
(WHERE NECESSARY TO BE ADHERED TO.

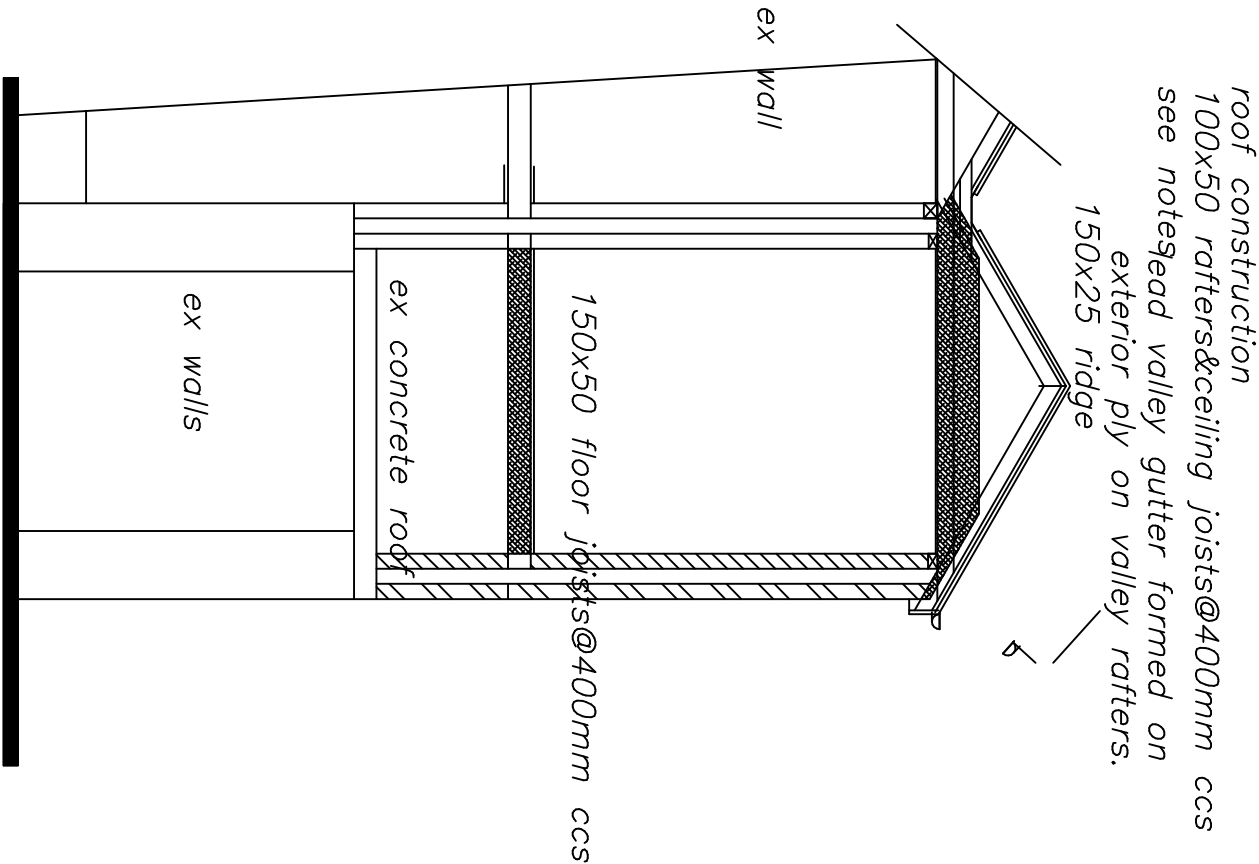

PROPOSED SECTION A-A

NO WORK TO COMMENCE BEFORE PLANNING PERMISSIONS REQUIRED HAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
LESS FIDELITY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL. OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED.
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO LESS FIDELITY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORTANT THAT THE CLIENT
SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE
THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED ALL PROVISIONS OF THE PARTY WALL ACT 1996
(WHERE NECESSARY TO BE ADHERED TO).


PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULEIMAN AMJAD ALI

SCALE:-1:50 DATE:-AUG'16

iesfoey
BUILDING
DESIGN CONSULTANTS

8,GLASSON WALK,
CHADDERTON,
OLDHAM,OL9 9DR
TEL&FAX: 0161-633-5057

new roof purpose designed roof trusses@450mm ccs
see notes

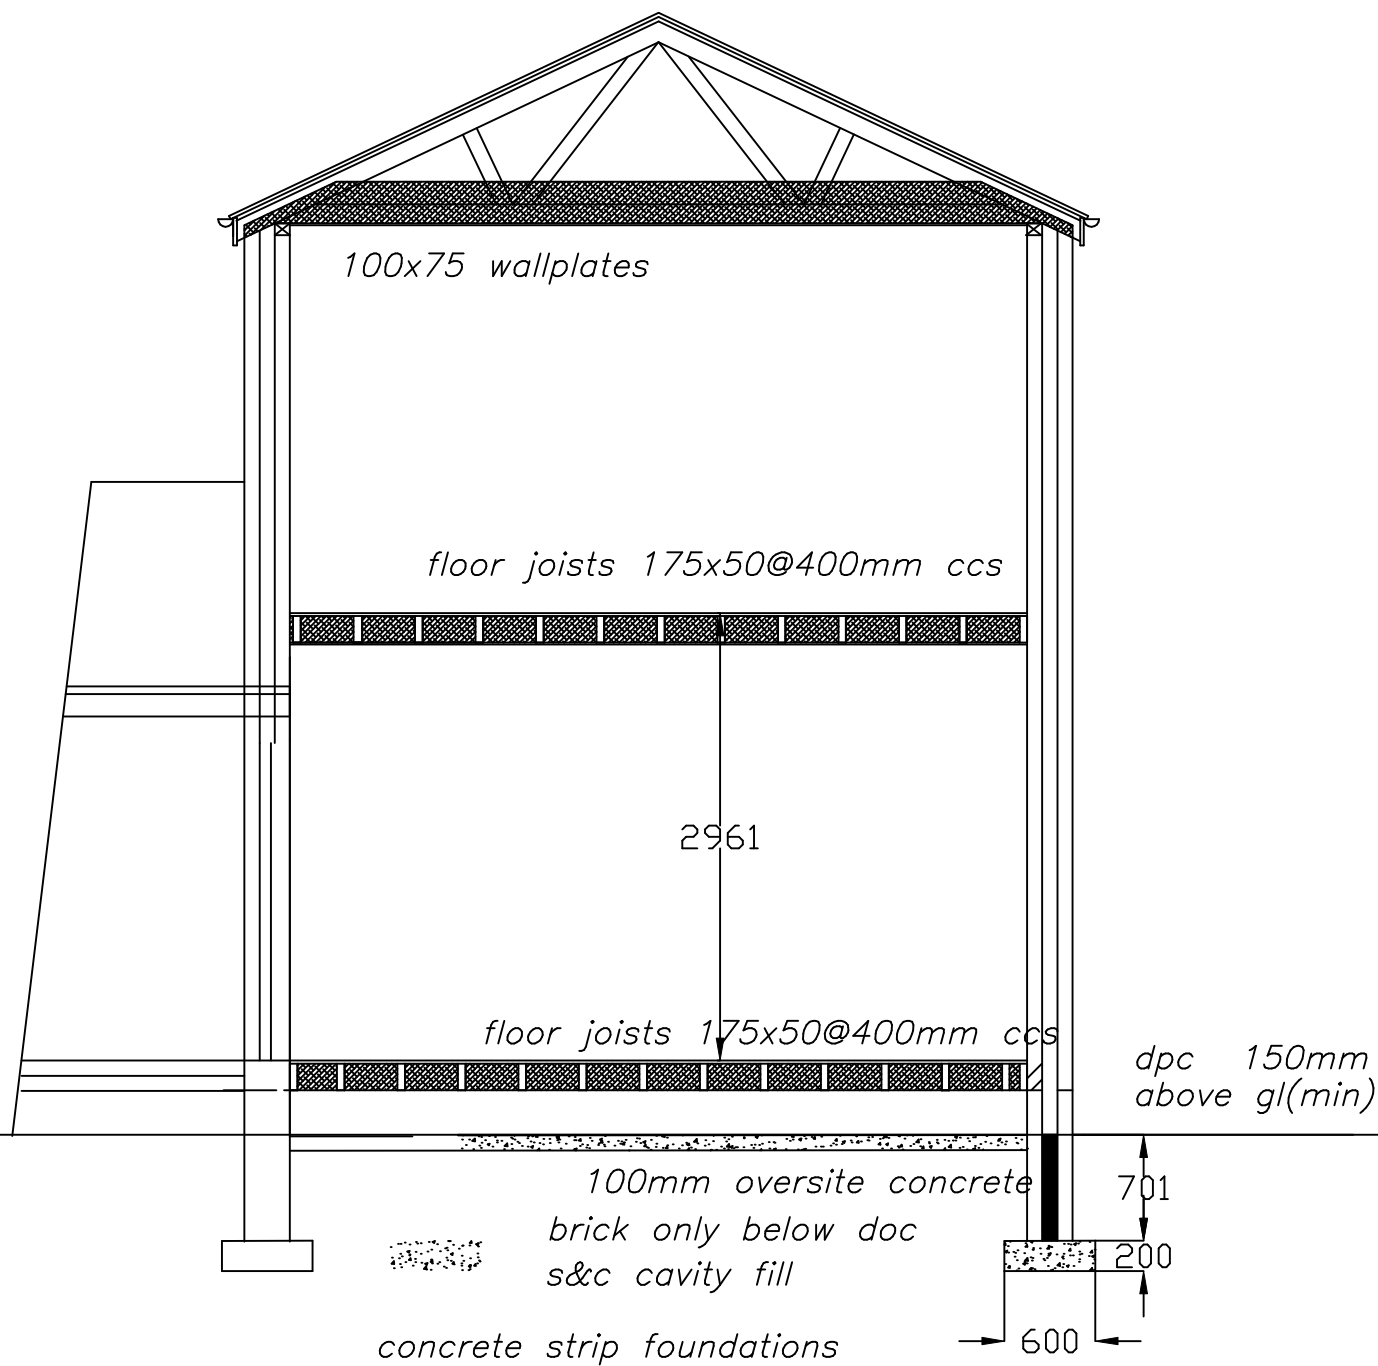

PROPOSED SECTION B-B

PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULIEMAN AMJAD ALI


SCALE:-1,50 DATE:-AUG'16

les foey
BUILDING
DESIGN CONSULTANTS


8,GLASSON WALK,
CHADDERTON,
OLDHAM,OL9 9DR
TEL&FAX: 0161-633-5057

NO WORK TO COMMENCE BEFORE PLANNING PERMISSION(IF REQUIRED)HAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
LES FOEY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO LES FOEY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORTANT THAT THE CLIENT
SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE
THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED.ALL PROVISIONS OF THE PARTY WALL ACT 1966
(WHERE NECESSARY TO BE ADHERED TO).


REVISED PLAN

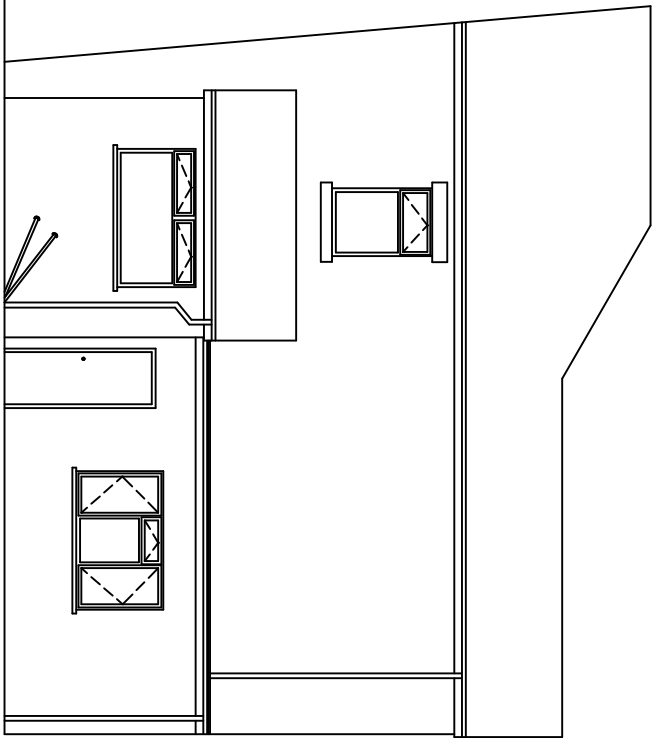


EXISTING REAR ELEV.

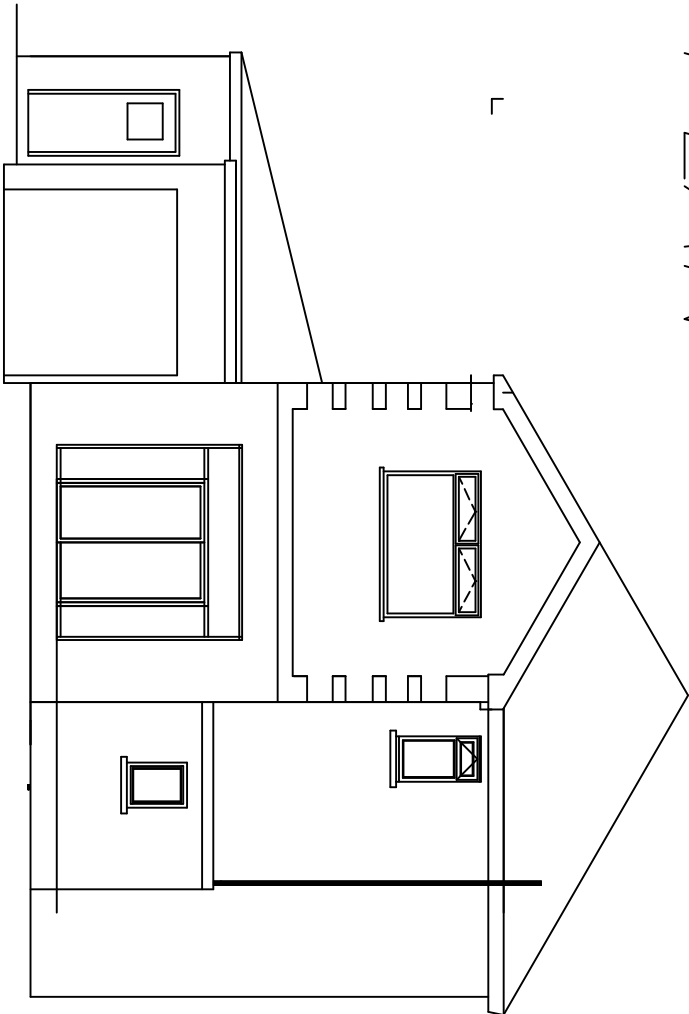


EXISTING SIDE ELEV.

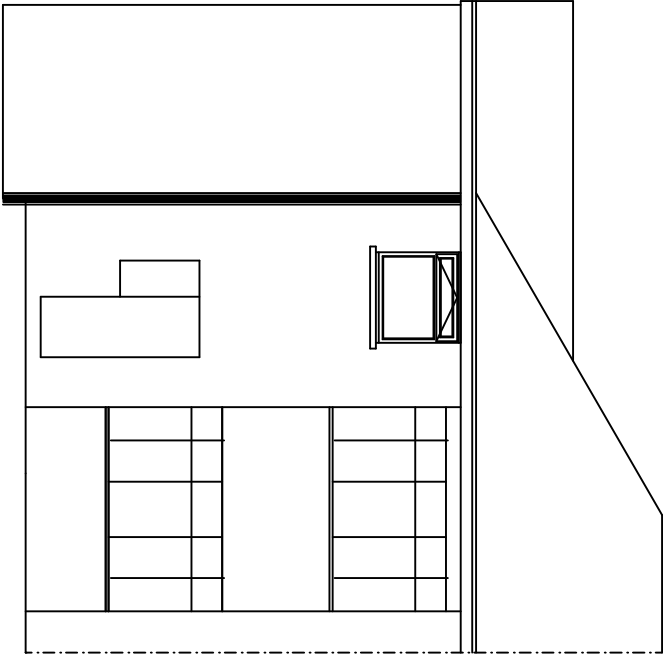

EXISTING FRONT ELEV.

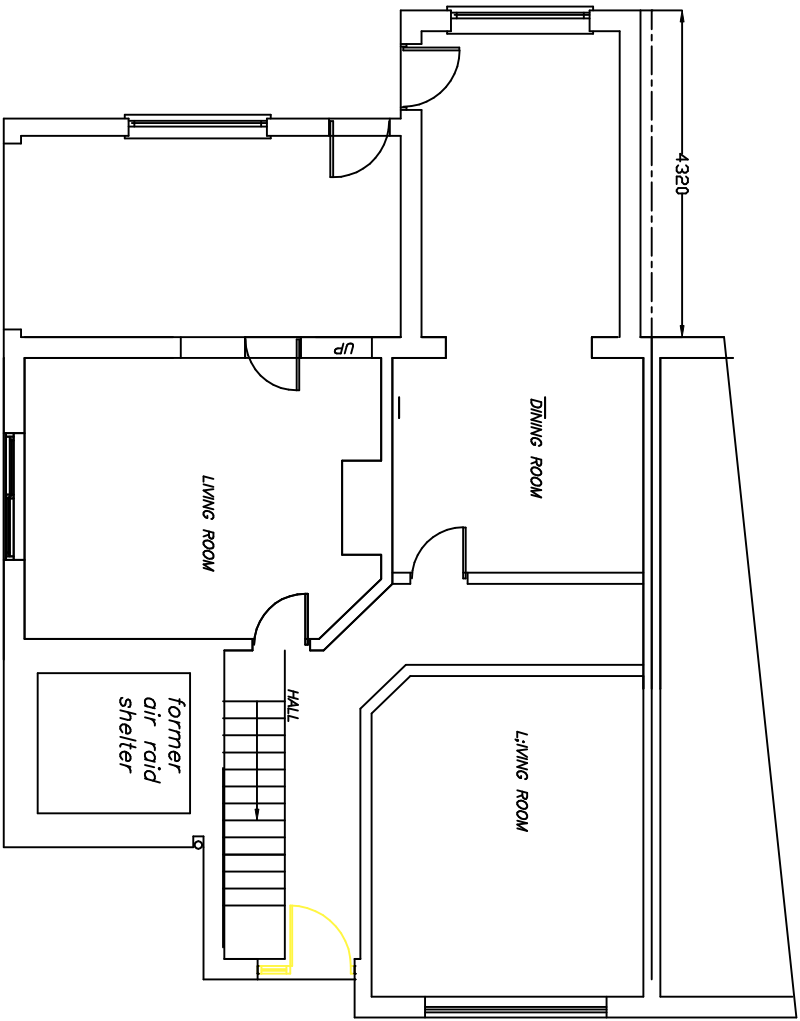

EX. GROUND FL.PLAN

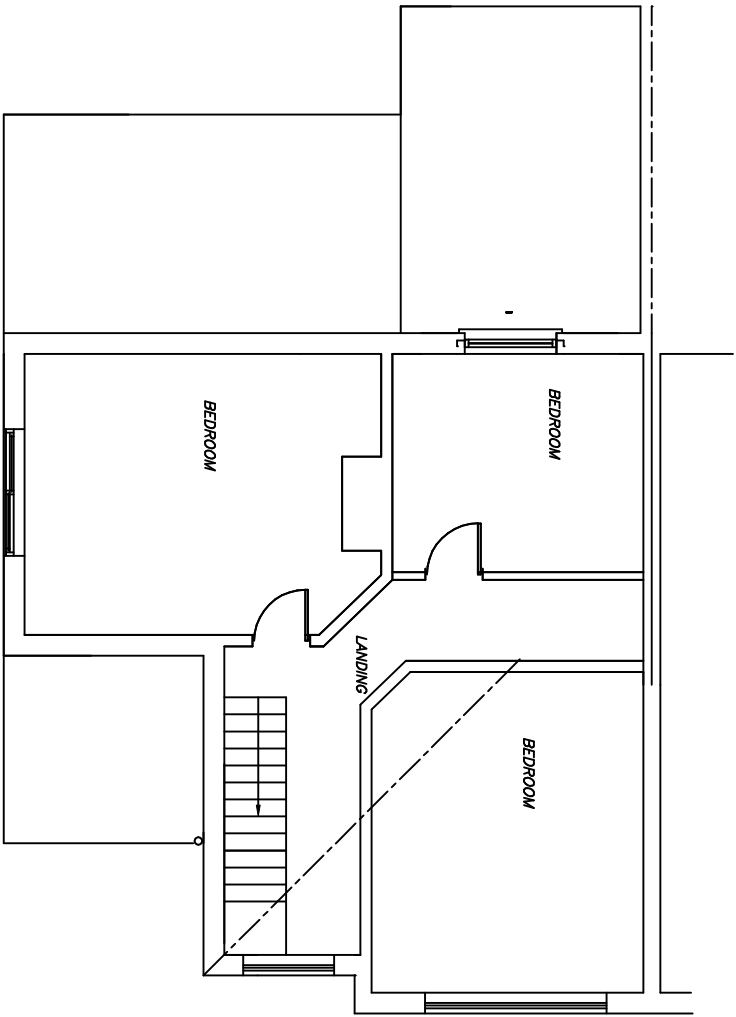

EX. FIRST FL.PLAN

PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULEIMAN AMJAD ALI

SCALE:- 1.100 DATE:-AUG'16

lesfoey
BUILDING
DESIGN CONSULTANTS

8,GLASSON WALK,
CHADDERTON,
OLDHAM,OL9 9DR
TEL&FAX: 0161-633-5057

THIS DRAWING HAS BEEN PRODUCED FOR BUILDING REGULATION
AND PLANNING PERMISSION ONLY . NO WORK SHOULD BE COMMENCED
UNTIL ALL STATUTORY APPROVALS HAVE BEEN GRANTED
APPOINTED CONTRACTOR TO ENSURE THAT DRAWINGS PROVIDED
ARE AS APPROVED.

ROOF CONSTRUCTION(new bedroom extension)
Tiles to match existing on 25 x 50 mm sw timber battens on breathable felt on purpose designed
gong nailed trusses at 450 mm ccs trusses to be cross braced 100mm fibreglass quilt insulation to be dropped between joists & further 175mm insulation dropped across joists u/s to be finished with 12.5mm plaster-board and skim. Roof to be provided with eaves ventilation equivalent to a 25mm continuous strip both sides.

ROOF CONSTRUCTION(new bathroom extension)
Tiles to match existing on 25 x 50 mm sw timber battens on breathable felt on100 x50 rafters & ceiling joists@400mm ccs 100mm fibreglass quilt insulation dropped between joists & 175mm draped across joists u/s to be finished with 12.5mm plaster-board and skim. Roof to be provided with eaves ventilation equivalent to a 25mm continuous strip both sides.

STAIRCASE CONSTRUCTION
Timber staircase to comply with building regs 1992 775 mm wide, equal risers of 200mm going 225 mm and pitch 42deg, risers solid (25mm softwood rebated into treads). Headroom and width as detailed. Fixed continuous handrail 900mm above pitch with vertical rolls 100mm maximum spacing between. Posts at top and bottom of stairs to protrude 50mm above handrail.

WALL CONSTRUCTION
300mm cavity wall comprising 100mm facing bricks to L.A. approval, 100mm cavity(DRITHERM FILLED) 100mm celcon wailing blocks with stainless steel wall ties (16mm lightweight plaster) (brickwork only below dpc). Wall ties to BS.1243 : 1972 (1981 amended) placed at 750mm horizontally and 450mm vertically and every 300mm of height adjacent to openings.U value=0.28W/m2k

FIRST FLOOR CONSTRUCTION(bedroom extension)
20mm thick flooring
grade chipboard on175 x 50mm timber joists at 400mm ccs underdrawn 12.5mm plasterboard and skim.
chipboard used on bathroom floors to be moisture resistant to BS 7331.100mm quilt insulation to be included.

FIRST FLOOR CONSTRUCTION(bathroom extension)
20mm thick flooring
grade chipboard on150x 50mm timber joists at 400mm ccs underdrawn 12.5mm plasterboard and skim.
chipboard used on bathroom floors to be moisture resistant to BS 7331.100mm quilt insulation to be included.

GROUND FLOOR CONSTRUCTION
20mm thick
flooring grade chipboard on 175x 50mm timber joists at 400mm ccs.
joists at 400mm ccs.

ELECTRICAL SPECIFICATION

THE INSTALLATION WILL BE DESIGNED,INSTALLED,INSPECTED AND TESTED TO THE STANDARDS REQUIRED BY PARTP' OF THE BUILDING REGULATIONS.
A'COMPETANT' ELECTRICIAN WILL UNDERTAKE THE WORK AND AN INSTALLATION CERTIFICATE WILL BE PROVIDED.

PRIOR TO COMMISSIONING THE INSTALLATION WILL BE TESTED BY AN ELECTRICIAN COMPETANT IN TESTING HOLDING A SUITABLE QUALIFICATION.

TESTING WILL BE COMPREHENSIVE WITH TESTS FOR CONTINUITY,AND EARTH LOOP IMPEDANCE.
ANY INSTALLATION UNDERTAKEN BY SOMEONE WHO IS NOT REGISTERED WITH NICEIC OR ECA MUST PROVIDE AN INSTALLATION CERTIFICATE TOGETHER WITH A TEST CERTIFICATE PREPARED BY A MEMBER OF THE NICEIC OR ECA.

THE PROPOSED DOMESTIC ELECTRICAL INSTALLATION WILL BE INSTALLED IN ACCORDANCE WITH BS 7671 AND THE CURRENT 17th EDITION OF THE WIRING REGULATIONS.
THE BEST PRACTISE ENDORSED WITH THE IEE ON SITE GUIDE WILL BE APPLIED.

WORK TO HEATING/HOT WATER SYSTEM BY GAS SAFE REGISTERED PLUMBER.

NEW DOUBLE GLAZED WINDOWS TO HAVE INNER PANE OF 1'K' GLASS AND MINIMUM GAP BETWEEN PANES 20mm,argon filled Uvalue 1.6
NEW BEDROOM WINDOWS TO HAVE ESCAPE WINDOW 0.3M2
WITH MINIMUM WIDTH OF ESCAPE WINDOW 450mmx800mm height.
BEAM OVER NEW EXTERNAL WINDOWS AND DOORS CATNIC COMBINED LINTOLS.
NEW GLAZING IN CRITICAL LOCATIONS TO COMPRISE TOUGHENED SAFETY GLASS TO BS6206

- 1) AREAS WITH DIFFERING HEATING NEEDS SUCH AS SEPARATE SLEEPING AND LIVING AREAS SHOULD HAVE INDIVIDUAL TEMPERATURE CONTROL-BY USE OF ROOM THERMOSTATS OR INDIVIDUAL RADIATOR VALVES.
- 2)SEPARATE TIMING CONTROLS SHOULD BE PROVIDED FOR SPACE HEATING AND HOT WATER(EXCEPT FOR COMBINATION BOILERS AND SOLID FUEL APPLIANCES.
- 3)BOILER CONTROLS MUST INCLUDE PROVISION TO PREVENT THE BOILER OPERATION WHEN NEITHER THE SPACE HEATING SYSTEM NOR THE HOT WATER SYSTEM REQUIRES HEAT.
- 4)THE NEW BOILER SHOULD HAVE A SEDBUCK RATING OF 86%
- 5)ALL HEATING AND HOT WATER SYSTEMS NEED TO BE FULLY COMMISSIONED AND CERTIFICATION PROVIDED.
- 6)INSTRUCTIONS FOR ALL RELEVANT CONTROLS ARE TO BE GIVEN TO THE OWNER.

75% OF NEW LIGHT FITTINGS TO BE OF THE TYPE THAT WILL ONLY ACCEPT ENERGY EFFICIENT LAMPS

NEW ELECTRICAL SWITCHES AND SOCKETS TO BE LOCATED WITHIN A ZONE BETWEEN 450mm & 1200mm FROM THE FINISHED FLOOR LEVEL..

ROBUST METHODS OF CONSTRUCTION TO BE ADOPTED.

INSULATED DPCS TO BE USED ON WINDOW AND DOOR REVEALS.

GENERAL NOTES

- 1. Vertical and horizontal dpc's to all cavity closures
- 2. Windows to open 1/20th room floor area along with controllable trickle vents with an equivalent area of 5000mm2.
where opening restrictors are to be provided the opening lights are to be increased in size to 1/10th of the room floor area.

wet room areas to be provided with mechanical extract ventilation using the following extract rates:-
kitchen-30 litres/sec adjacent to hob or 60 litres/sec, elsewhere
utility room-30 litres/sec
bathroom-15 litres/sec.

- 3. Steelwork to be 1/2 hour fire protected, encased in 20mm plasterboard and skim, 2mm wire binding at 100mm pitch
- 4. New brickwork to match and key into existing
- 5. Roof and floors to be tied down to walls with 30mm x 5mm ms straps at 2000mm ccs.
- 6. R.C. lintels over drains passing through walls
- 7. Any undersight drainage to be exposed and encased in 150mm pea gravel, flexible jointed and have rodding access provided to L.A. approval.
- 8. Brick infill between joists 25mm clearance from underside of roof
- 9. Foundations to regulation A1/A2
- 10.Exterior quality timber to facias
- 11.All cavities to be continuous
- 12.Air bricks ducted through wall cavity
- 13.Podstones to all steelwork
- 14.All plumbing to comply with B.S.5572
- 15.Cavity barriers (9mm masterboard or brick on edge
- 16.Foundations within 900mm of drains to be taken down to drain invert level
- 17.Depth of foundations to be taken to suitable sub-stratum irrespective of dimensions shown on drawing
- 18.Cross flow ventilation to be provided to roof space in accordance with B.S.5250 : 1989
clause 9.1

PROPOSED LIVING ROOM,
BATHROOM&CONSERVATORY&
BEDROOM EXTENSION AT
1,CARSON ROAD,LEVENSHULME,
MANCHESTER FOR
MR SULEIMAN AMJAD ALI

SCALE:-1.75 DATE:-



iesfoey
BUILDING
DESIGN CONSULTANTS

8,GLASSON WALK,
CHADDERTON,
OLDHAM,OL9 9DR
TEL&FAX: 0161-633-5057

NO WORK TO COMMENCE BEFORE PLANNING PERMISSIONS REQUIREDHAS BEEN GRANTED.
NO WORK TO COMMENCE UNTIL BUILDING REGULATIONS APPROVAL HAS BEEN GRANTED.
LESS FEELY ACCEPTS NO RESPONSIBILITY FOR WORK UNDERTAKEN BEFORE BUILDING REGULATION APPROVAL OBTAINED.
ALL SIZES AND DIMENSIONS TO BE CHECKED AND VERIFIED BY THE CONTRACTOR BEFORE WORK COMMENCED
AND ANY DIFFERENCE TO THIS PLAN TO BE REPORTED TO LESS FEELY BEFORE WORK COMMENCES.
IF THE WORK FALLS WITHIN THE PROVISIONS OF THE PARTY WALL ACT 1996 IT IS IMPORANT THAT THE CLIENT SERVES NOTICE TO THE OWNERS OF THE ADJOINING PROPERTY OF THE INTENTION TO BUILD TWO MONTHS BEFORE THE COMMENCEMENT DATE AND THAT WRITTEN PERMISSION IS OBTAINED.ALL PROVISIONS OF THE PARTY WALL ACT 1966 (WHERE NECESSARY TO BE ADHERED TO.