




DO NOT SCALE

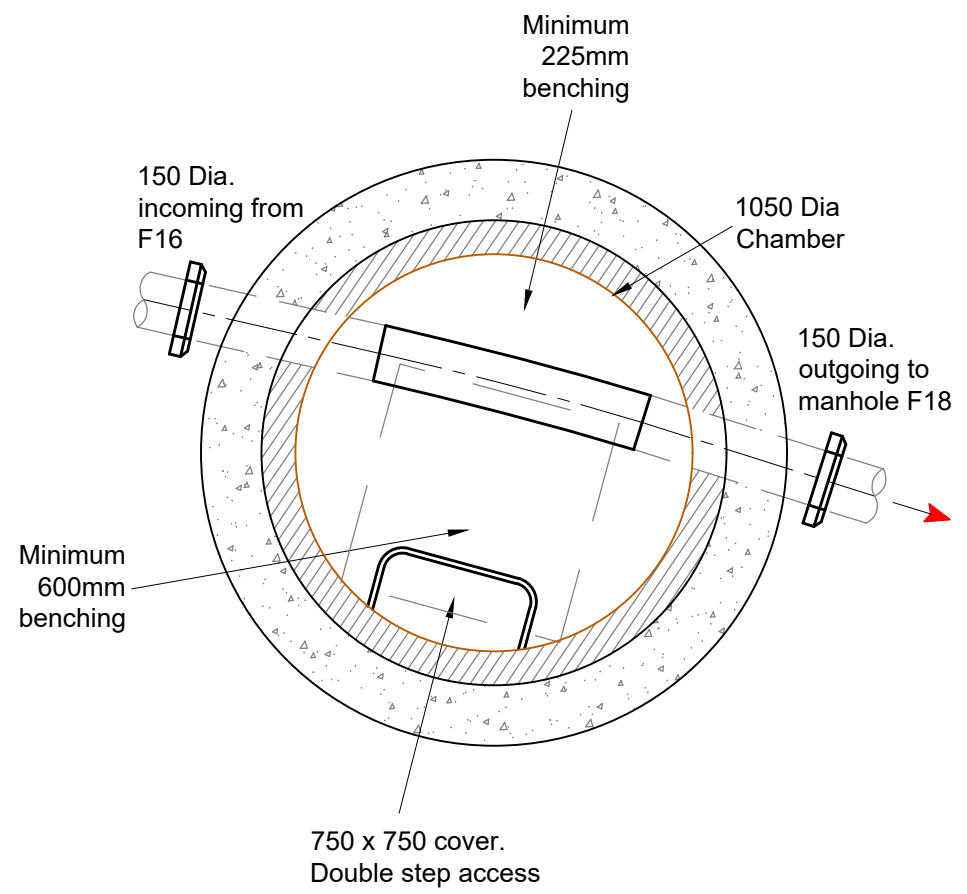


Manhole	F17
MH Diameter	1050mm
Cover Level	75.931
Invert Level	74.581
MH Type	Type 4
Depth to Soffit	1.200
Depth to Cut-Out Recess (SW storage MHs only)	N/A
Cover Size	750 x 750 mm
Cover Depth	150mm
Cover Spec.	D400
Ladder or Double Steps?	Double step
Safety Chain	No
Safety Rails	No
Invert Access Steps	No
Hole Size in Cover Slab	750 x 750 mm

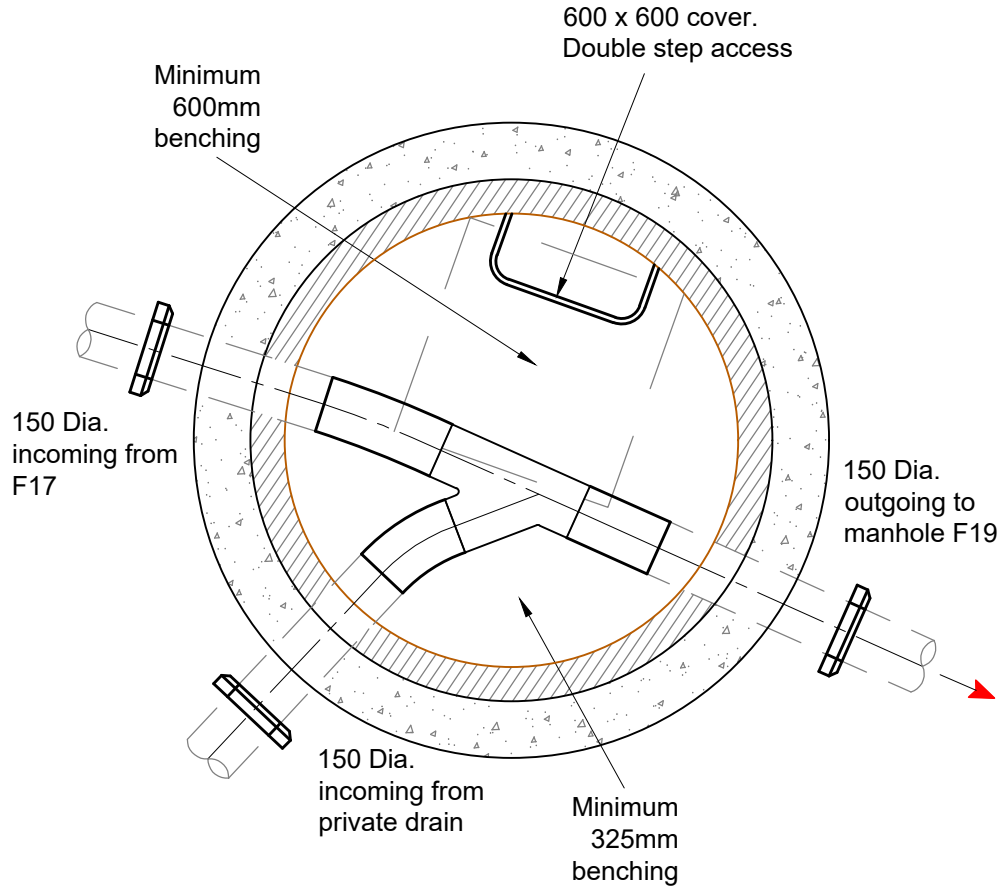

Manhole	F18
MH Diameter	1200mm
Cover Level	76.123
Invert Level	74.451
MH Type	Type 1
Depth to Soffit	1.522
Depth to Cut-Out Recess (SW storage MHs only)	N/A
Cover Size	600 x 600 mm
Cover Depth	150mm
Cover Spec.	D400
Ladder or Double Steps?	Double step
Safety Chain	No
Safety Rails	No
Invert Access Steps	No
Hole Size in Cover Slab	750 x 600 mm

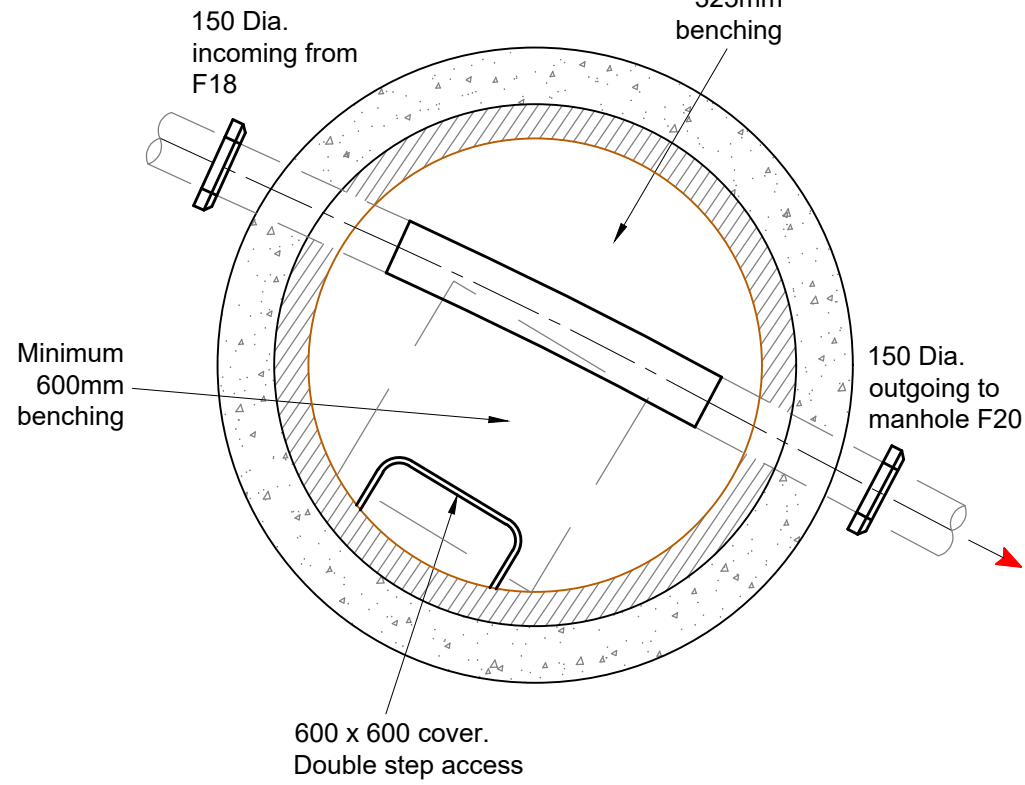


Manhole	F19
MH Diameter	1200mm
Cover Level	76.400
Invert Level	74.268
MH Type	Type 1
Depth to Soffit	1.982
Depth to Cut-Out Recess (SW storage MHs only)	N/A
Cover Size	600 x 600 mm
Cover Depth	150mm
Cover Spec.	D400
Ladder or Double Steps?	Double step
Safety Chain	No
Safety Rails	No
Invert Access Steps	No
Hole Size in Cover Slab	750 x 600 mm

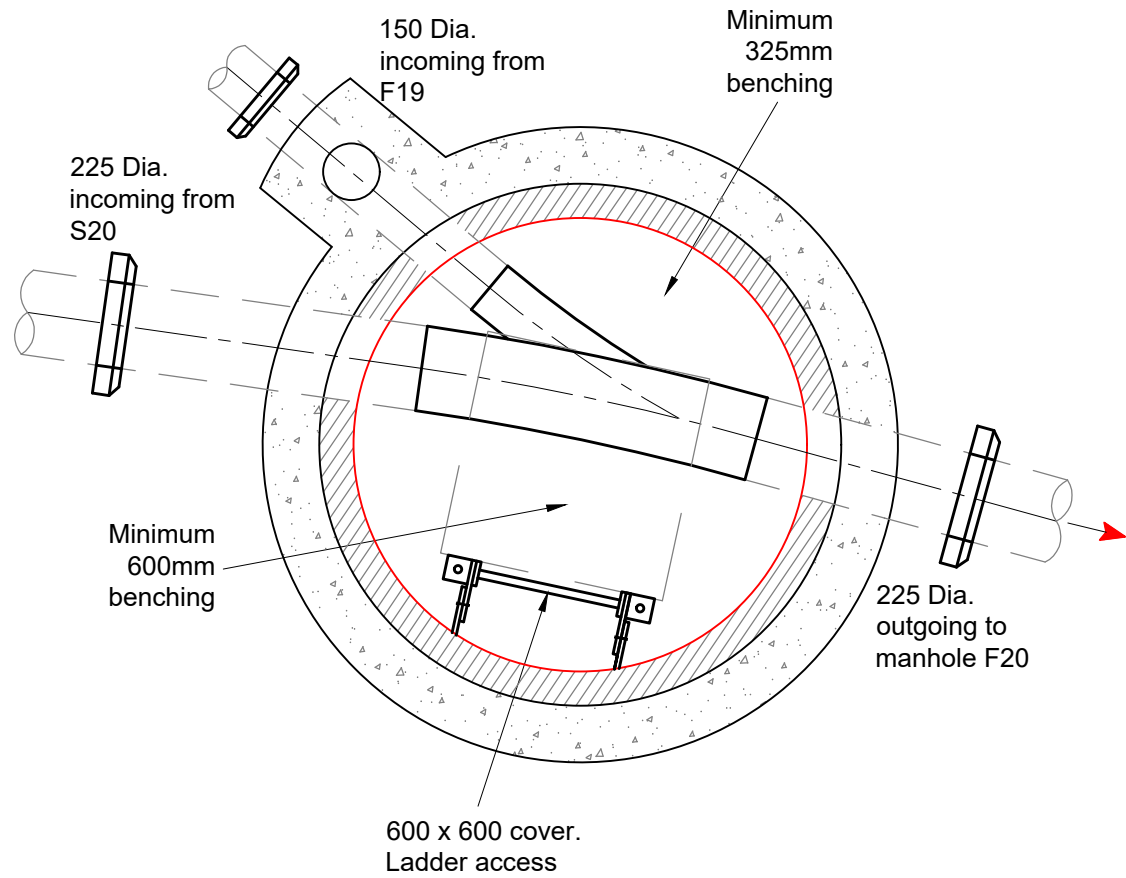

Manhole	C1
MH Diameter	1200mm
Cover Level	76.510
Invert Level	72.228
MH Type	Type 1
Depth to Soffit	4.132
Depth to Cut-Out Recess (SW storage MHs only)	N/A
Cover Size	600 x 600 mm
Cover Depth	150mm
Cover Spec.	D400
Ladder or Double Steps?	Ladder
Safety Chain	No
Safety Rails	No
Invert Access Steps	No
Hole Size in Cover Slab	750 x 600 mm

Combined Sewer

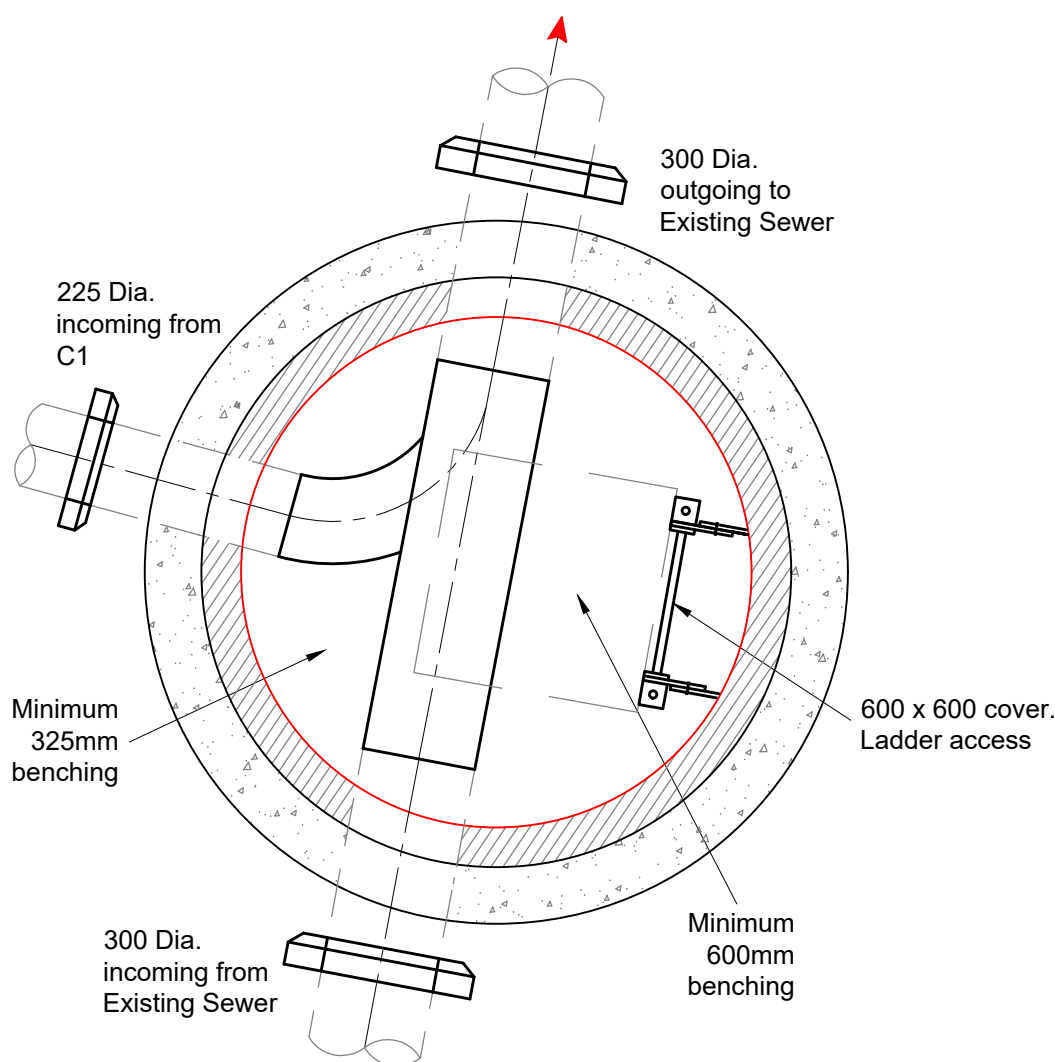

Manhole	C2
MH Diameter	1350mm
Cover Level	76.650
Invert Level	71.850
MH Type	Type 1
Depth to Soffit	4.476
Depth to Cut-Out Recess (SW storage MHs only)	N/A
Cover Size	600 x 600 mm
Cover Depth	150mm
Cover Spec.	D400
Ladder or Double Steps?	Ladder
Safety Chain	No
Safety Rails	No
Invert Access Steps	No
Hole Size in Cover Slab	750 x 600 mm

Combined Sewer

Notes

- All works shall be in accordance with Sewers for Adoption 6th Edition and United Utilities Standard Details and Guidelines.
- Step Rungs shall be installed in accordance to BS EN 13101.
- Manholes shall be to United Utilities Standard Detail STND/01/001. Ladders, Safety chains and Handrailing shall be to Standard Detail STND/01/002. Back-drops shall be to Standard Detail STND/01/003.
- 150mm min concrete surround required for all adopted Manholes.
- Rocker pipes shall be provided in accordance with United Utilities Standard Detail STND/19/010.
- Pipe materials as table below or similar approved by United Utilities.
- All lateral connections will be made at soffit level to the main channel.

Pipe Materials Table

Pipe Materials Table	Pipe Materials Table
150	CLAYWARE
225	CLAYWARE
300	CLAYWARE
375	CONCRETE
450	CONCRETE
600	CONCRETE
750	CONCRETE
900	CONCRETE
1200	CONCRETE
1500	CONCRETE

Bedding and Surround Table

Depth to Soffit	Bedding and Surround Type
>1.2m	Class S
<1.2m	Class Z

APPROVAL

A	04.01.21	Updated to suit UU comments	LW	AJ
Rev.	Date	Revision	By	Appd.

coopers

chartered consulting engineers

Tel: 01244 684910
Fax: 01244 684911
Email: admin@coopers.co.uk
Web: http://coopers.co.uk

Park House
Sandpiper Court
Chester Business Park
Chester
CH4 9QU

Client

BRANLEY HOMES LTD

Project

White House Club, Middleton Road,
Manchester

Title

Foul Water Manhole Details
Sheet 3 of 3

DRAWING NUMBER	SCALE at A1	1:20	REVISION
7424 / 13-3	DATE	?	A
	DRAWN	PW	
	CHECKED	AJ	