



Flush Sash Casement Windows

Sovereigns range of casements windows can be tailored to suit all applications.

All profiles have 5 chambers and are designed to be thermally efficient

There is a choice of 3 main frames & 2 Transom / Mullion

56, 70, 85mm Outer frame

68 or 82mm Transom / Mullion

61mm Sash

Sloped /Scotia bead to suit 28mm Sealed unit

All reinforced in conjunction with the system manual
for residential low rise dwellings

Casement Hinges & Hardware

All Casement hinges are to be Securistyle Defender / Defender restricted

General side hung sashes to have one restricted hinge to the bottom rail

Small top hung sashes below 450 to have std hinges

Large top hung sashes above 450 to have two restricted hinges

Egress hinges to side hung casements to be 12" / 16" Egress locations

will have a hook & pin type restrictor

Locking Espagnolette

All casement espagnolettes will be Maco MSPag Off set cam

Casement Handles

All handles are available in White, Gold, Satin Silver, Chrome

Key locking, push button auto engage

Push button auto engage locking.

Egress locations will have a Green push button auto engage.

All sited central to the sash

Ventilators

All to be from the Brookvent SM.1200 range, sited in a 45mm frame extension

2000, 3000, 4000, 5000Sq.Mm Vent Size to suit sash width

See Illustration






Glazing

To suit 28mm 36mm or 44mm


Sub Cills

95mm, 150mm or 180mm


See Illustration

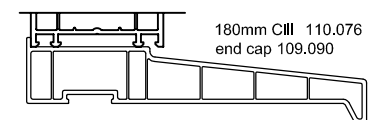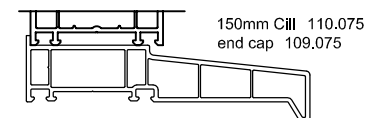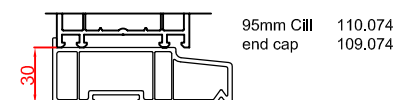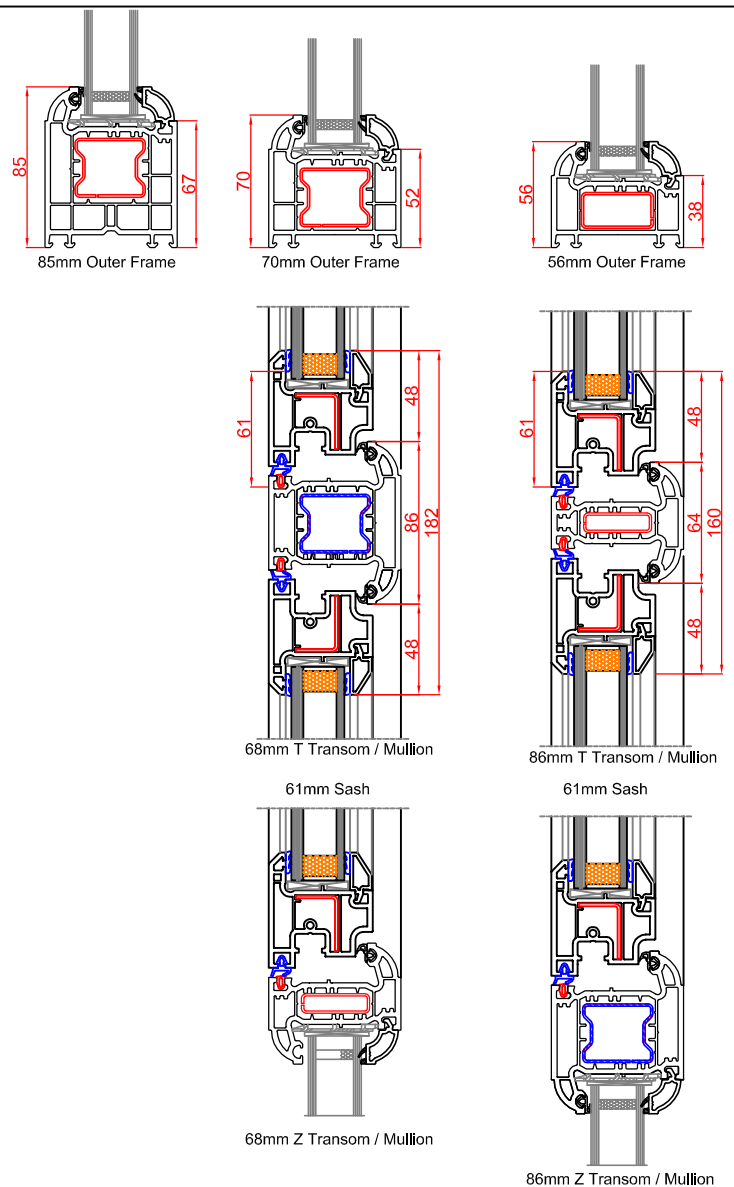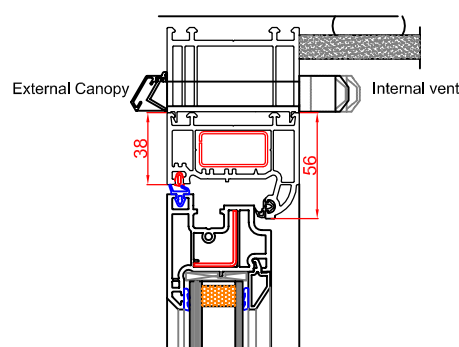

15mm frame extension 114.028



30mm frame extension 114.014



45mm frame extension 114.202

