


32/1000 Box Profile 0.7 PVC Plastisol Coated Roof Sheet Slate Blue (18B29) 1000mm Width

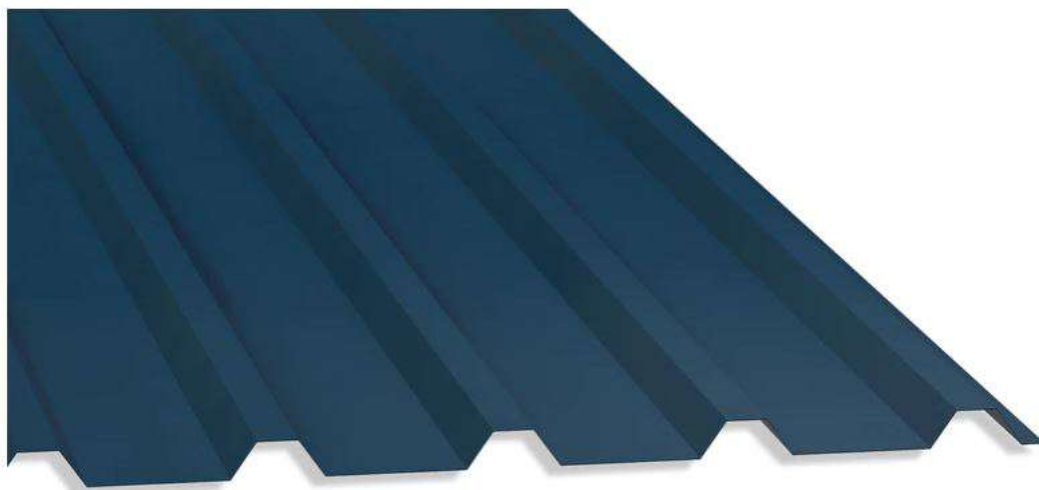

BY COLOUR CLAD PROFILES LTD

Colour Clad Profiles 32/1000 Single Skin 0.7mm Plastisol (PVC finish) Box Profile Sheets deliver an effective solution for your roofing requirements. Colour Clad can manufacture this profile with or without strengthening ribs which add an additional strength to the profile and an aesthetic quality. Our sheets can be used for domestic, commercial and... [Read more](#)


Price Per Meter: £20.34


Sheet Length (m)

1


ADD TO CART

[Click here to view all of our sheets manufactured with Anticon.](#)

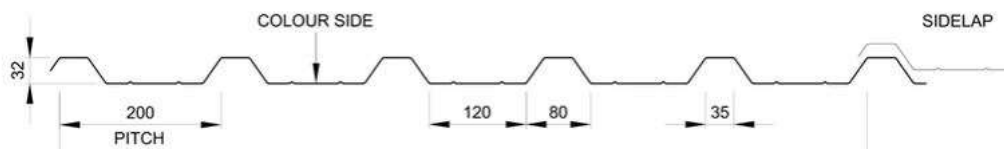

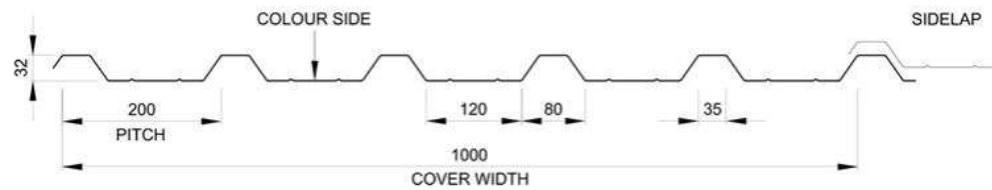

Description

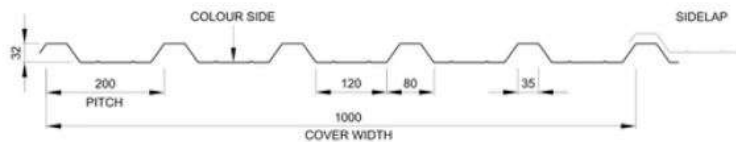


Colour Clad Profiles 32/1000 Single Skin 0.7mm Plastisol (PVC finish) Box Profile Sheets deliver an effective solution for your roofing requirements. Colour Clad can manufacture this profile with or without strengthening ribs which add an additional strength to the profile and an aesthetic quality. Our sheets can be used for domestic, commercial and industrial applications and offer a high-quality, cost effective solution for your roofing projects. CCP32/1000 offers a 200mm pitch across the sheet width and 32mm profile height, these sheets have a wider gulley which can be easier to walk on during the fitting process, it is wide enough for a stable footing. CCP 32/1000 Plastisol (PVC finish) sheeting is manufactured using Prime material and manufactured in house ensuring quality is delivered every time. Each of our sheets offer a meter cover width when lapped. If you would like to see what other Box Profile Profiles we offer please [click here](#).

SHEET MEASUREMENTS

LOAD SPAN TABLES

ANTI-CON LINING

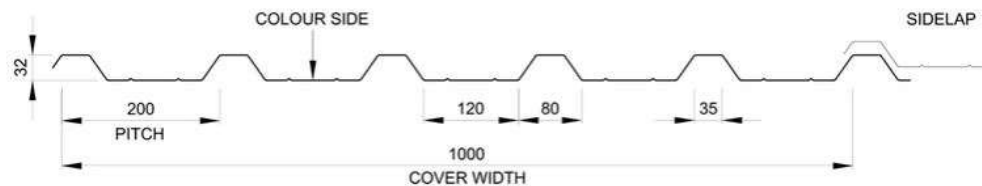

Description

SHEET MEASUREMENTS

- Cover Width: 1000mm when lapped
- Profile Height: 32mm
- Pitch: 200mm
- Sheet Thickness: 0.7mm
- Minimum Roof Pitch: 4 Degrees
- Weight: 0.5mm = 6.4kg per/m approx.
- Max Sheet Length: 10m in 0.7mm thickness
- Colours: Juniper Green, Slate Blue, Anthracite Grey, Merlin Grey, Terracota, Poppy Red, Ocean Blue, Sargasso, White, Van-Dyke Brown, Olive Green, Goosewing Grey, Galvanised

LOAD SPAN TABLES

ANTI-CON LINING



Description	▼
SHEET MEASUREMENTS	▼
LOAD SPAN TABLES	▲

Imposed Load (+ve)

Narrow Flange in Compression (Single Span)

Deflection Limit L/200 *

FACTORED IMPOSED LOADS (kN/m2)																	(positive +ve)		
Thickness (mm)	Weight (kg/m2)	Span Condition	Span (m)																
			1.00	1.10	1.20	1.30	1.40	1.50	1.60	1.70	1.80	1.90	2.00	2.10	2.20	2.30	2.40		
0.50	4.90	Single	3.47	2.85	2.38	2.02	1.73	1.50	1.23	1.02	0.86	0.72	0.62	0.53	-	-	-		
		Double	2.27	1.96	1.71	1.50	1.34	1.19	1.07	0.97	0.88	0.81	0.74	0.68	0.63	0.58	0.54		
		Multi	2.70	2.33	2.04	1.80	1.60	1.43	1.29	1.17	1.07	0.98	0.90	0.83	0.76	0.67	0.59		
0.70	6.41	Single	6.00	4.92	4.11	3.48	2.82	2.28	1.87	1.55	1.30	1.10	0.94	0.81	0.71	0.62	0.54		
		Double	3.83	3.29	2.86	2.51	2.22	1.98	1.77	1.60	1.45	1.32	1.21	1.11	1.03	0.95	0.88		
		Multi	4.57	3.94	3.43	3.02	2.67	2.39	2.14	1.94	1.76	1.61	1.47	1.35	1.18	1.03	0.90		