

Lincoln Square

JUNE 2019



DOCUMENT CONTROL

FILE NAME
PL1531-ID-008-01- HARDWORKS - CONDITION 3

PREPARED BY (INITIALS) TF		
CHECKED BY (INITIALS) AM		

1

HARDWORKS SURFACES

HARDWORKS | CONDITION 3



HARDWORKS SURFACES LIST

- P1a - Proposed Granite Sett Paving.

Colour/ Finish:

33% Darton D (fine grained), Fine Picked

33% Classic, Flamed

34% Cloudy Grey, Flamed

All sides: sawn.

Dimensions: 150-300mm long x 150mm wide x 50mm deep

Jointing Width: 8mm, to engineer’s detail and specification

Supplier: Hardscape, or similar approved

Laid: Random Stretcher Bond

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P1b - Proposed Granite Sett Paving.

Colour/ Finish:

33% Darton D (fine grained), Fine Picked

33% Classic, Flamed

34% Cloudy Grey, Flamed

All sides: sawn.

Dimensions: 150-500mm long x 150mm wide x 30mm deep

Jointing Width: 8mm, to engineer’s detail and specification

Supplier: Hardscape, or similar approved

Laid: Random Stretcher Bond

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P2a - Proposed Granite Sett Paving.

Colour/ Finish:

33% Darton D (fine grained), Fine Picked

33% Classic, Flamed

34% Cloudy Grey, Flamed

Dimensions: 150mm x 450mm x 50mm

All sides: sawn.

Jointing Width: 8mm, to engineer’s detail and specification

Supplier: Hardscape, or similar approved

Laid: Stack Bond

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P2b - Proposed Granite Sett Paving.

Colour/ Finish:

33% Darton D (fine grained), Fine Picked

33% Classic, Flamed

34% Cloudy Grey, Flamed

Dimensions: 150mm x 450mm x 30mm

All sides: sawn.

Jointing Width: 8mm, to engineer’s detail and specification

Supplier: Hardscape, or similar approved

Laid: Stack Bond

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)

- P3 - Proposed Granite Flag Paving/Steps.

Colour: Kobra Green,

Finish: Top bush hammered, bottom and sides sawn

Sizes: 992mm length ,992mm wide, 50mm thickness tbc by engineer.

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P4 - Scoutmoor Yorkstone Flag Paving.

Colours: Greyish Buff

Finish: Diamond sawn

Sizes: 600mW x random 600-900mmL x 63mmD (Cut units: lengths no smaller than 450mm)

Jointing Width: 8mm (6-10mm), to engineer’s detail and specification.

Supplier: Marshalls

Laid: random stretcher bond across the footway.

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- RB - Porous Resin Bound Gravel.

Colour: Mulberry

Aggregate: 6mm

Depth: 30mm thickness (TBC by engineer)

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P6.1/P6.2 - Granite Corduroy Hazard Warning Flags.

Colour: Crystal Black

Finish: Corduroy (Part M compliant)

Size: 400mm x 400mm

(P6.1) 50mm Depth TBC by engineer

(P6.2) 30mm Depth TBC by engineer

Jointing Width: 8mm (6-10mm), to engineer’s detail and specification

Supplier: Hardscape

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- S1-S5 - Granite Steps - with contrasting thread and nosing.

Colour: Kobra Green

Finish: Picked

Supplier: Hardscape (t:01204565500) or similar and approved

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)
- P7a-P7d - Special Granite Paving Units


To fit around columns to Lincoln House.

Depth: 50mm


Colour: Cloudy Grey

Finish: Flamed

(Refer to drawing LSQ-PLA-XX-XX-DR-L-1002/1003)

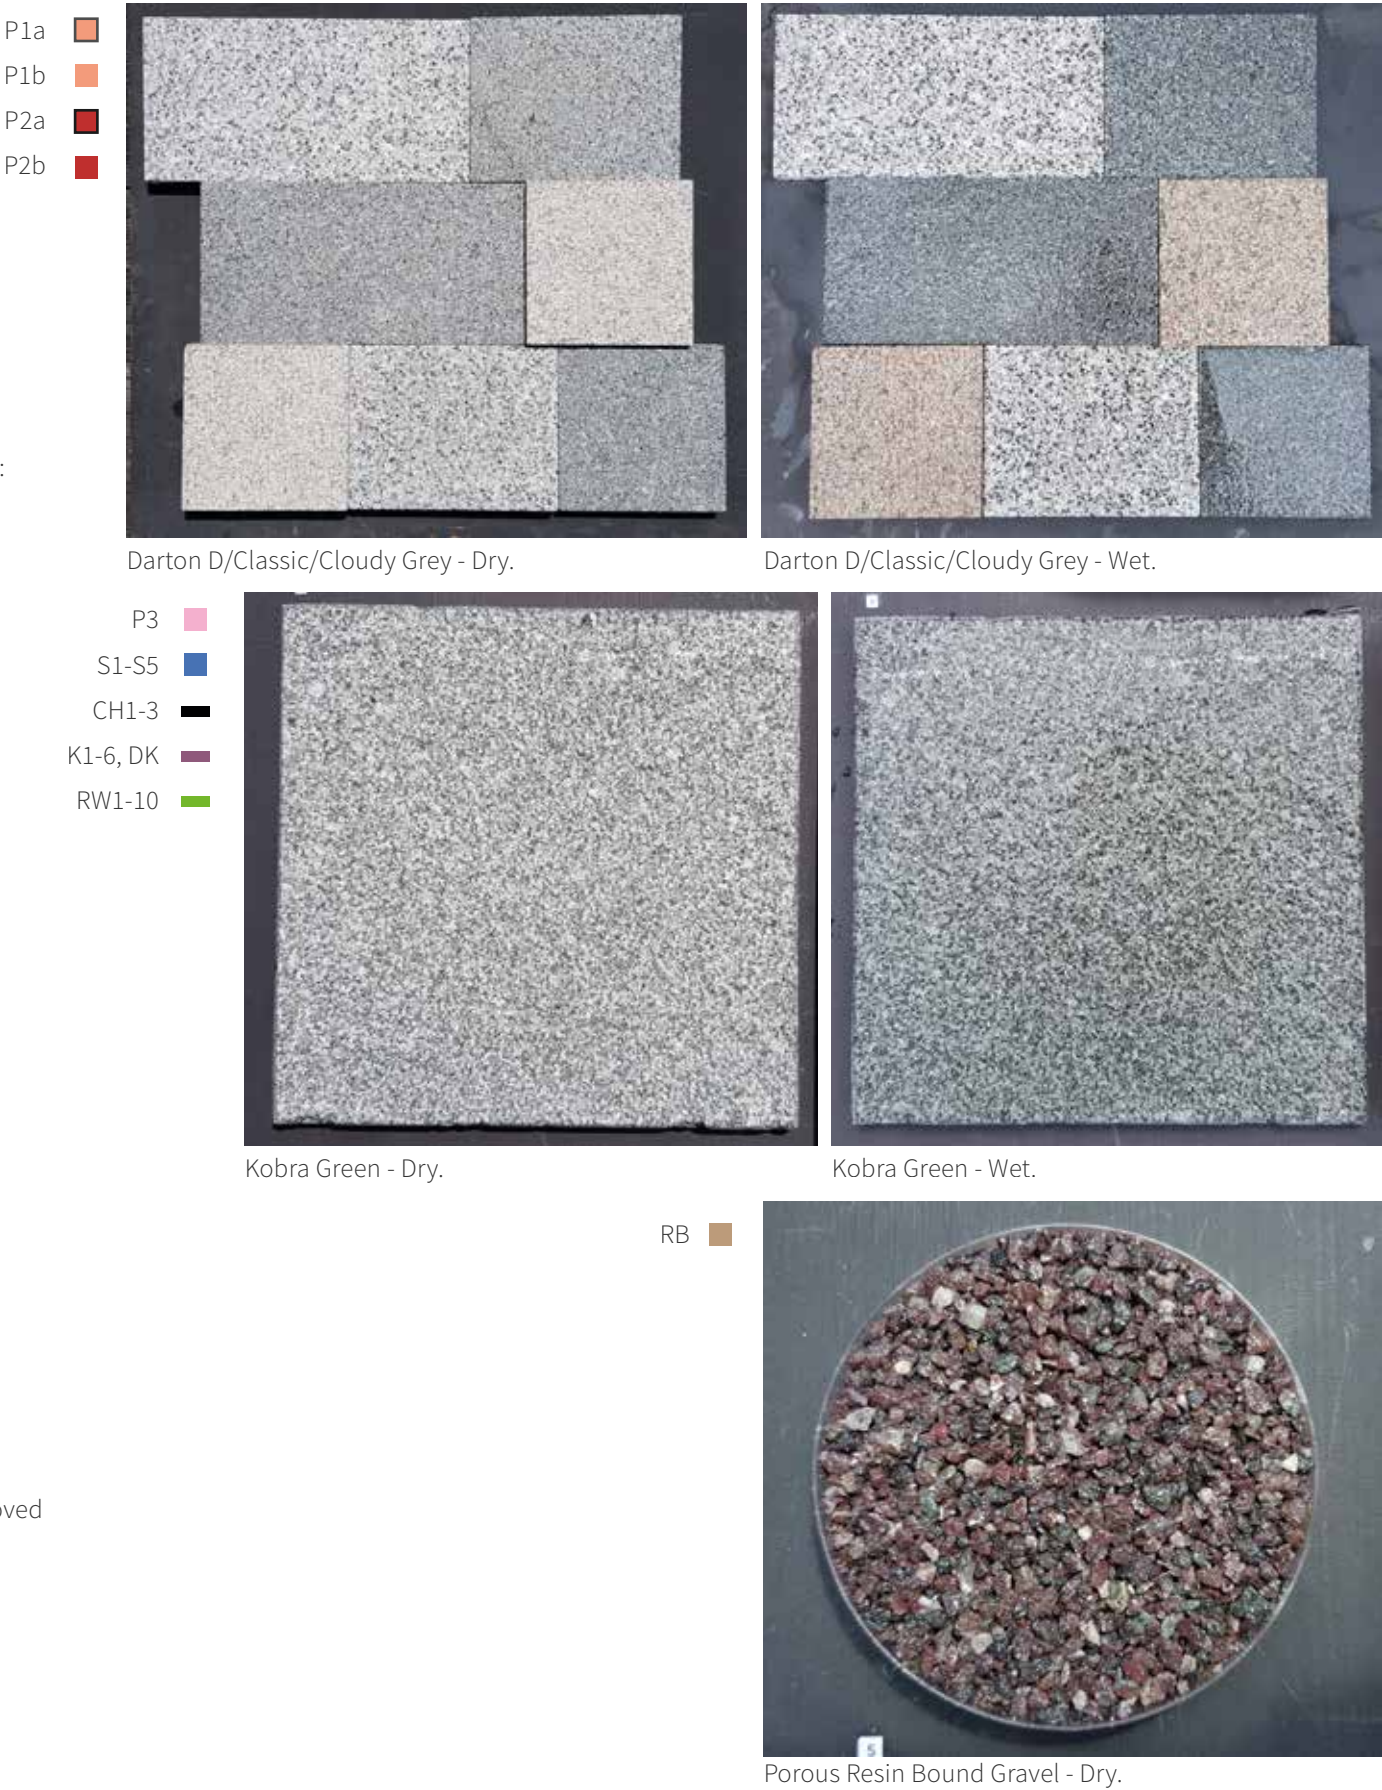

HARDWORKS | CONDITION 3

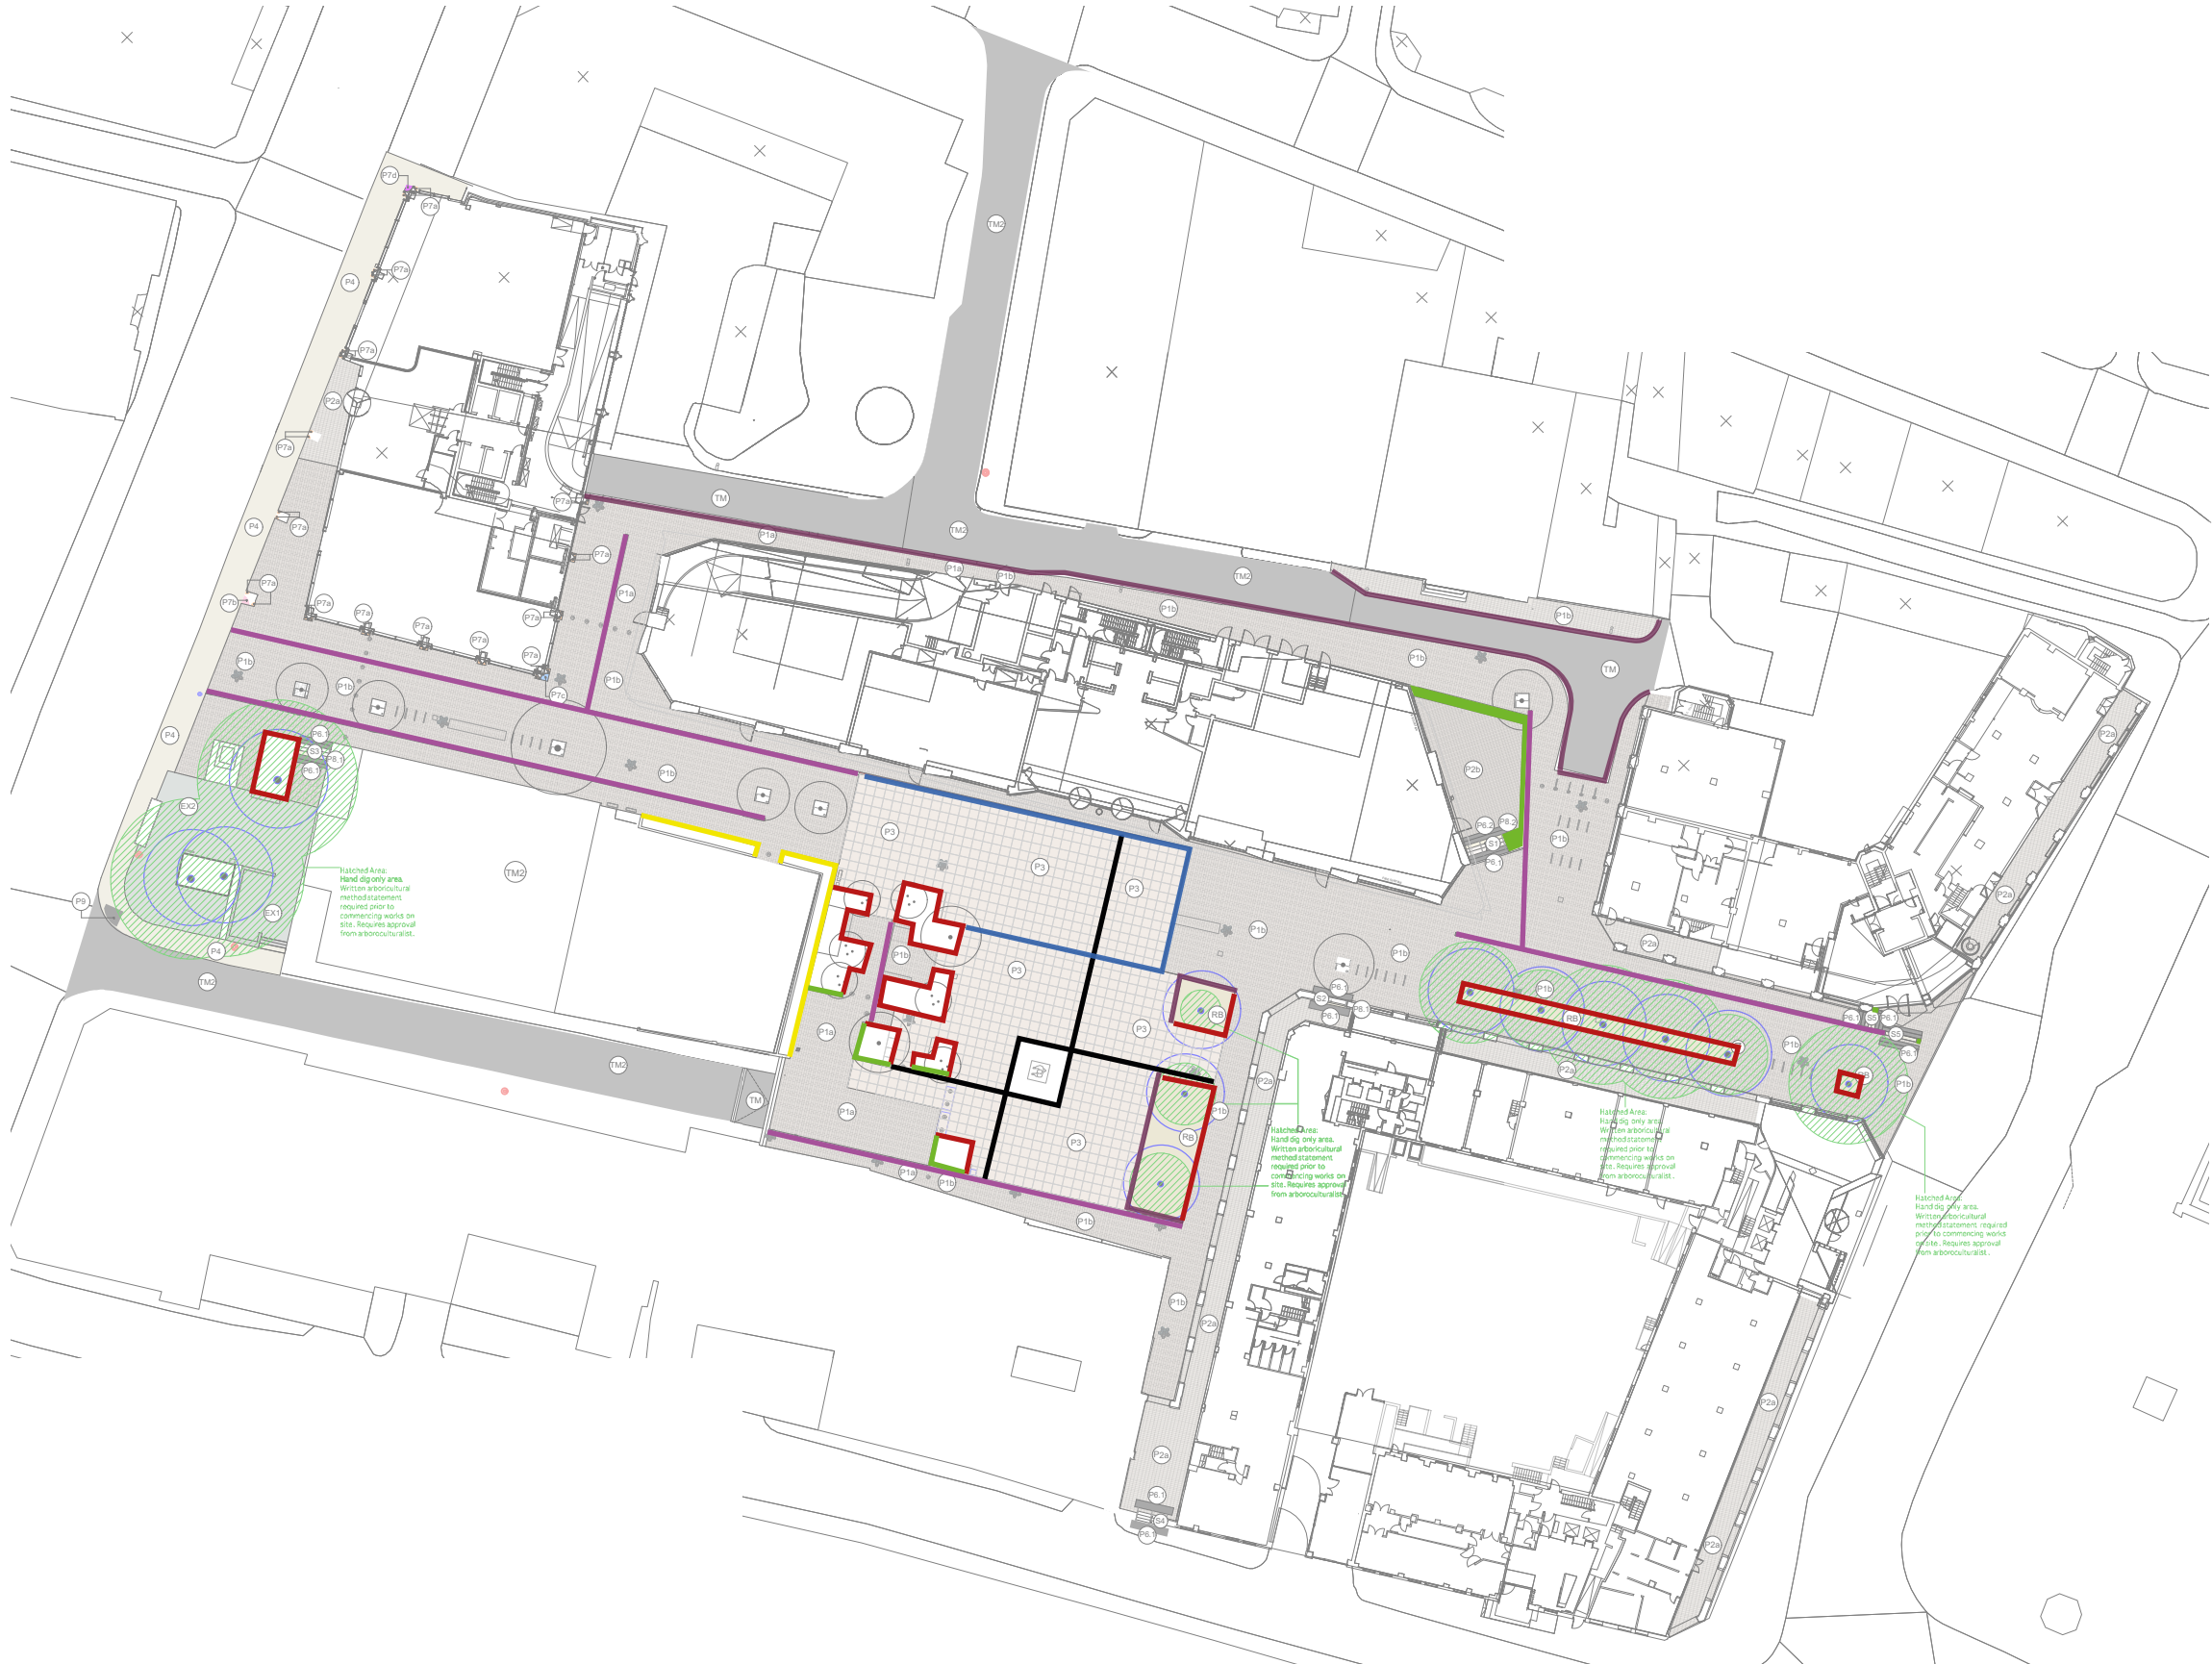

HARDWORKS SURFACES LIST

- CH1-CH3 - Granite Interpretation Channel
Colour: Kobra Green
Finish: Artscape
Sizes: Vary
Supplier: Hardscape, or similar approved
Laid: TBC by artwork manufacturer (haunched in place to engineers details).
(Refer to drawing LSQ-PLA-XX-XX-DR-L-1004/1005)
- CH4 - Granite Channel
Colour/Finish:
20% Cloudy Violet, Flamed
30% Classic, Flamed
50% Cloudy Grey, Flamed
Dimensions: 312mm wide x 300-500mm long x 150mm depth. Laid flush to adjacent hardstanding (haunched in place to engineers details).
(Refer to drawing LSQ-PLA-XX-XX-DR-1004/5)
- DC - Proposed Cast Ductile Iron Drainage Channel
Type: ACO-Multi Drain, Heelsafe
Dimensions: Varies - refer to engineer's specification
Material: cast iron
(Refer to drawing LSQ-PLA-XX-XX-DR-1004/5)
- K1-K6, DK - Granite Kerb
Finish: Fine Picked
Colour:Kobra Green
Size: 300mmW x 900mmL x laid as 100mm upstand to adjacent surface, 5mm Bullnose, allow for special radii corner units and tapered units (Haunched in place to engineers details).
(Refer to drawing LSQ-PLA-XX-XX-DR-L-1004/1005)

- MW1/MW2 - Steel Cladding to Memorial Walls.
Material: Steel
Finish: Powder coated: Mars 2525
by Interpon - D2525 - YX355F Matt
(Refer to drawing LSQ-PLA-XX-XX-DR-L-1004/1005)
- SE1-SE3 - Steel Edging to Lincoln Square Planters/Tree Pits
Manufacturer: Kinley Systems
Material: Steel
Finish: Powder Coated - Interpon Mars 2525
Dimensions: 3mmW x Varied lengths x Varied heights to suit levels.
(Refer to drawing LSQ-PLA-XX-XX-DR-L-1004/1005)
- RW1-RW10 - Granite Retaining Wall
Colour: Kobra Green
Finish: fine picked sides, polished top.
Dimensions: vary
(Refer to drawing LSQ-PLA-XX-XX-DR-L-1004/1005)

CH1-3 ■



Inlaid Steel/Bronze Text Precedent



Inlaid Steel/Bronze Leaf Motif Precedent



Etched and Sand-Blasted 'Proud' Text Precedent




Water-Jet Cut Leaf Motif Precedent

MW1/2 ■
SE1-3 ■



Steel Edging/Cladding

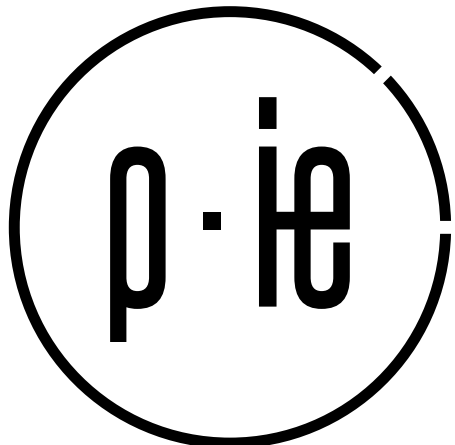

MANCHESTER

2 Back Grafton Street
Altrincham,
WA14 1DY
+44 (0)161 928 9281

LONDON

Waterside, 44-48 Wharf Road
London,
N1 7UX
+44 (0)207 253 5678

LIVERPOOL

No. 8 Princes Parade, Princes Dock
Liverpool,
L3 1DL
+44 (0)151 363 1230