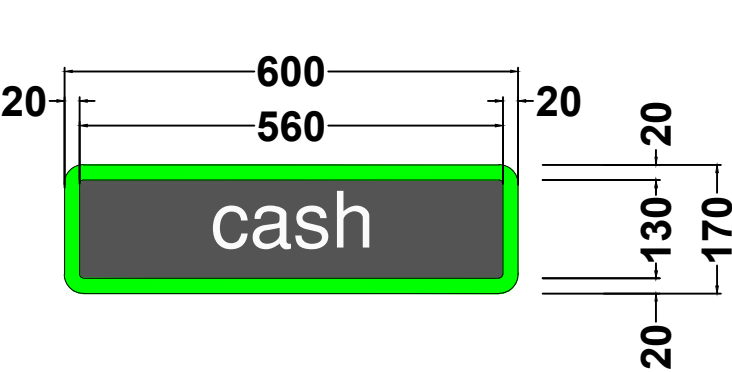


TECHNICAL INFORMATION:

- CONSTRUCTED USING GRP MANUFACTURING PROCESS. DURALITE IS USED FOR THE SURROUND, AND INSET LOGO/LETTERING.

METHOD OF ILLUMINATION:

- LED - ROWS OF LED LIGHTS BEHIND THE TEXT AND TO THE EDGE OF THE BLACK RAISED AREA
- WHITE LETTERING IS TRANSLUCENT
- STATIC ILLUMINATION
- INTERNAL ILLUMINATION
- APPROX. >60 lux @ 1.0 METRE AND WITH AMBIENT LIGHTING >80 lux
- BLACK AND GREEN - PMS 369

PLANNING ATM SIGNS	TITLE CASHZONE FTU UNIVERSAL ILLUMINATED TOP & BOTTOM SIGN			03				drawing approval		
				02						
	DRAWN NG & MK	DATE 01/12/2022	SCALE 1:10 @ A3	01				NAME:-		
	REF/DRG No. CSS0104	SHEET SHEET 1	REVISION					POSITION:-	APPROVED:-	
					REVISION	DESCRIPTION	DATE	BY	DATE:-	SIGNED:-