

LIGHTING SCHEDULE

Cut and Craft, Manchester | EXTERIOR REV03

25.02.2025






MISTRY LIGHTING



Reference of fitting and lit effect.

**/GS Glare shield**

Standard glare shield provides an excellent balance between glare control and light output. This accessory works well in most applications.

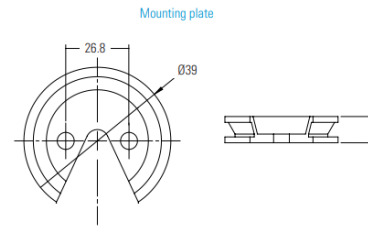

Product Name:	LD10235
Product Code:	LD10235-E3-700-LW30-NB-GS-RAL
Finish:	RAL finish to match facade
Cut-out:	N/A
Dimensions:	ø 68mm – (H) 80mm
Accessories:	Glare shield
Wiring:	Remote Dali Driver
Drive Current:	700mA 14V
Wattage:	10W LED
Output:	653lm (Narrow Beam 12°)
Lighting Controls:	Mains Dimmable
Colour Temperature:	3000K CRI 85+
IP Rating:	IP67/IK08



Application:

Surface mounted spotlight to illuminate façade. Narrow beam. Remote driver to be installed internally. Fitting will be resin bonded to the façade ledge. Cable entry is behind the fitting.

Manufacturer: Light Graphix
 Contact: Aine Coomber
 Email: aine@lightgraphix.biz
 Tel: +44 (0)1322 527629

IMPORTANT NOTE

•ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.
 •ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

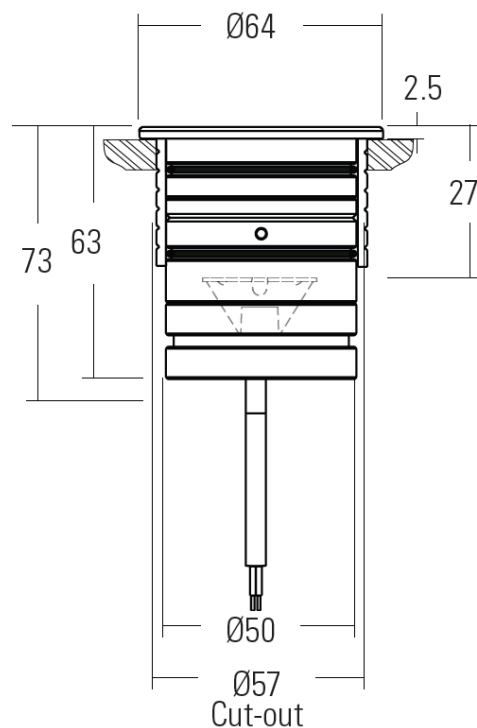

Product Name:	LD141X
Product Code:	LD141X-E3-700/LW30/NB/L/GSHM/316 SS/441S
Finish:	316 Stainless Steel
Cut-out:	Ø 57mm
Dimensions:	As Shown
Accessories:	First Fix Sleeve & Glare Control Shield
Wiring:	In-series Constant Current Wiring
Drive Current:	700mA 11.8V
Wattage:	9.2W LED
Output:	12° Narrow Beam Angle (No Tilt)
Lighting Controls:	Mains Dimmable
Colour Temperature:	CRI 85 - 3000k
IP Rating:	IP67

Application:

Inground uplights to highlight main entrances. Anti-glare shield required to reduce glare.

Fitting to be mounted within a granite block that is resin bonded to the ground.

Cable entry from behind and driver housed internally.

Manufacturer: Light Graphix

Contact: Aine Coomber

Email: aine@lightgraphix.biz

Tel: +44 (0)1322 527629

IMPORTANT NOTE

*ALL DIMENSIONS, ESPECIALLY CUTOUT DIMENSIONS, MUST BE CONFIRMED PRIOR TO WORKS COMMENCING ON SITE.

*ANY IMAGES PROVIDED ARE INDICATIVE, AND MAY NOT REFLECT THE COLOUR OR FINISH OF THE ACTUAL FITTING PROPOSED, OR SHOW ITEMS SUCH AS ACCESSORIES, LAMPS OR TRANSFORMERS WHICH MAY BE INCLUDED IN OUR COSTINGS AND BE REQUIRED TO OPERATE THE FITTING.

MISTRY LIGHTING

T: +44 (0)774715 3333
E: Krishna@mistrylighting.com
www.mistrylighting.com



WWW.MISTRYLIGHTING.COM



MISTRY LIGHTING

