


1 / 1066 **Fairfield Street Courtyard Elevation Downtaking**

1 : 100

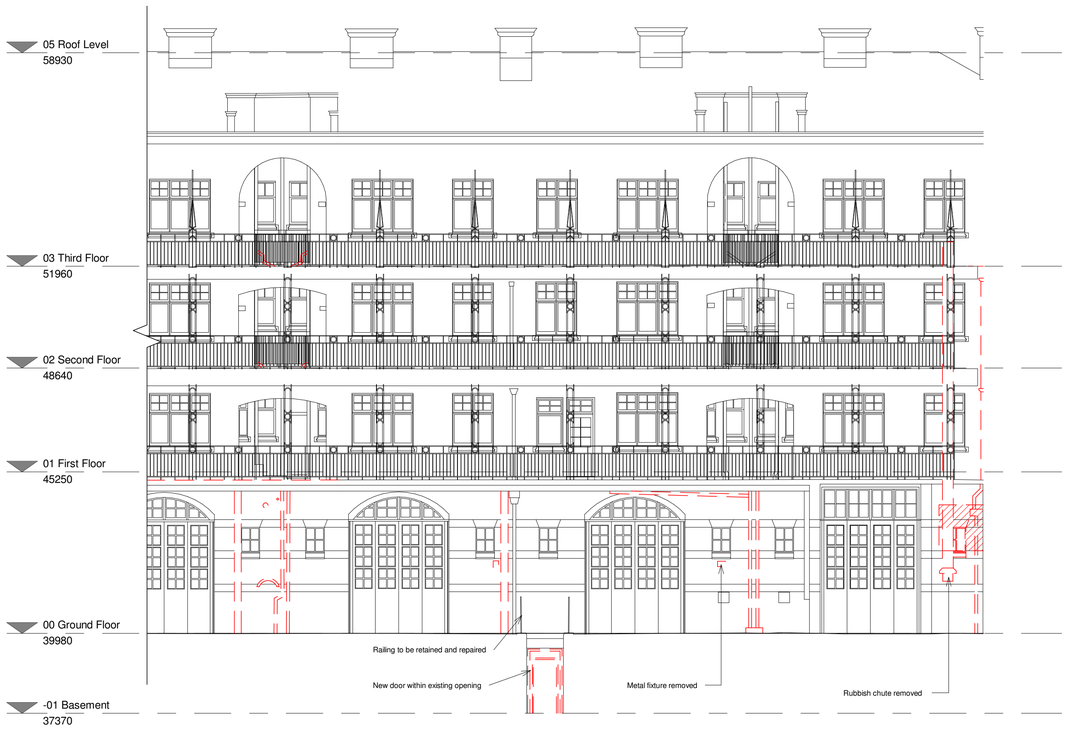

2 / 1066 **Fairfield Street Courtyard Elevation Downtaking 2**

1 : 100

Notes:

Drawings are based on survey data and may not accurately represent what is physically present.


Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.

All dimensions are in millimeters unless noted otherwise.

Purcell shall be notified in writing of any discrepancies.

Key Plan

not to scale



Key Notes

Masonry repaired to all locations where redundant fixtures and fitting removed

Window repaired, glass reinstated to all locations where boarding or other redundant items removed

Railings to to taken down will be retained, cleaned and re-used elsewhere within the project.

Removal of items

Redundant fixtures and plastic RWP to be removed

Openings formed in fabric

Removal of boards to openings

Window to be removed, opening to be retained for new door

Lintel replacement to widen opening

Rooflights in poor condition - Replace rooflights with a double glazed unit to suit existing opening

0 1m 2m 3m 4m 5m 10m

REV	DATE	DESCRIPTION
1	06/12/19	For Planning
2	18/12/19	For Approval
3	19/12/19	For Planning

CLIENT

Allied London

PROJECT

London Road Fire Station

JOB NUMBER

240242

PURCELL

TITLE

Fairfield St Courtyard Downtakings and Alerations

SIZE	SCALE	LAST REVISED	DRAWN	CHECKED
A1L	As indicated	19/12/2019 17:00:44	Author	Checker

REV 3 **SUITABILITY/REASON FOR ISSUE** **S2 FOR PLANNING**

DRAWING NUMBER

240242-PUR-FS-A-1066

St James', 79 Oxford Street, Manchester, M1 6FQ

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.