| REVISION | DATE | DESCRIPTION |
|---|---|---|
| - | 01.08.18 | PRELIMINARY ISSUE |
| A | 05.09.18 | AMENDED IN LINE WITH COMMENTS |




**PROPOSED PLAN - DETAIL**

LEVEL 00

1:100 @ A3

## KEY

**1.** New Dropped Kerb
*to enable back of pavement parking arrangement*

**2.** New Hard Landscaping
*incl. tarmac parking area and marked bays and stair / ramp to new entrance*

**3.** New Soft Landscaping
*incl. robust planting and street trees (specification TBC)*

**4.** External Bike & Bin Store
*enclosed by steel mesh wall with integral doors*

**5.** Store

**6.** Lobby

**7.** Plant Room
*Size TBC based on proposed M&E installation*

**8.** Multi-Purpose Hall

**9.** WC

**10.** Accessible WC

**11.** Brew Point
*(with cabinets, worktop and sink)*

NOTES

- New / replacement soors and windows indicated with unique reference references
- Dropped kerb arrangement subject to agreement with Highways Department
- Hall to receive suspended plasterboard soffit with acoustic properties (assume Class A sound absorber)

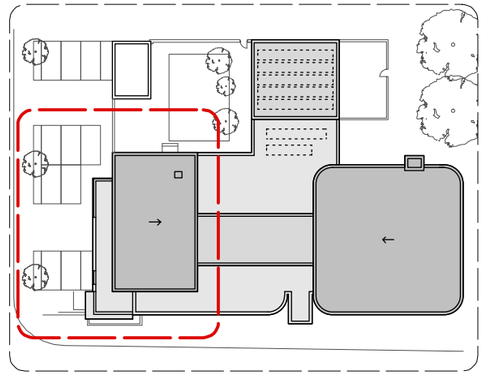

**PLAN KEY**


OMI ARCHITECTS

31, Blackfriars Road, Salford, Manchester M3 7AQ

t 44(0)161 832 3242
f 44(0)161 832 3623
e info@omiarchitects.com
w www.omiarchitects.com


| | | | | | |
|---|---|---|---|---|---|
| PROJECT | BRUNSWICK CHURCH | | | | |
| DRAWING | PROPOSED PLAN - LEVEL 00 - DETAIL | | | | |
| DATE | JUL' 18 | DRAWN BY | PE | SCALE | 1:100@A3 |
| JOB NO. | 1406 | DWG.NO. | L1010 | | |