LEVEL 02
9335

LEVEL 01
4820

Reception Level
1005

LEVEL 00
0



Existing canopy detail to be retained


Existing lighting to internal lift core to be repaired and made new

George Street Detail Elevation

0 0.5m 1m
1:20



Precedent image showing similar lighting proposal on Charlotte Street

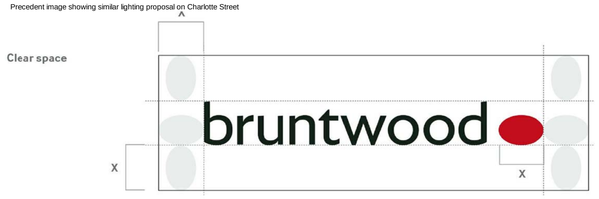

Bruntwood Sample Text

Back-lit signage to external facade.

Signage to to be opaque lettering recessed to acrylic perspex box with multicolour (RGBW) LED Strip to provide feature lightingBack-lit signage to external facade.

Signage to to be opaque lettering recessed to acrylic perspex box with multicolour (RGBW) LED Strip to provide feature lighting

Lightbox depth to remain 75mm throughout as wraps from George Street to New York Street

notes

1. DO NOT SCALE FROM THIS DRAWING - USE FIGURED DIMENSIONS ONLY.
2. TO BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS / SPECIALISTS DRAWINGS. REPORT ANY DISCREPANCIES BEFORE AFFECTED WORK COMMENCES.
3. ALL SETTING OUT DIMENSIONS TO BE CHECKED ON SITE BY CONTRACTOR BEFORE WORK COMMENCES.

PLANNING

revisions		date; issue by; check
A	Updated elevations to reflect Planners comments	28.03.2018 LM OT

client: Bruntwood

project: The Exchange Option 2

drawing title: George Street Detail Elevation

drawing number: **017184_P-217**

revision: A

drawing status: Planning

scale: 1 : 20 @ A1

date: 03/26/18

drawn by: OT

checked by: SK

seven architecture

seven architecture offices at :

61 Oxford Street, **MANCHESTER,** M1 6EQ
t : 0161 236 5655

Clarendon House, Victoria Avenue, **HARROGATE,** North Yorks, HG1 1DY
t : 01423 709 807

24 Greville Street, **LONDON**, EC1N 8SS
t : 0203 026 0691

Galeri 6, Doc Victoria, **CAERNARFON,** Gwynedd, LL55 1SQ
t: 01286 685 253

www.sevenarchitecture.co.uk