Not to scale

Lucop 22389

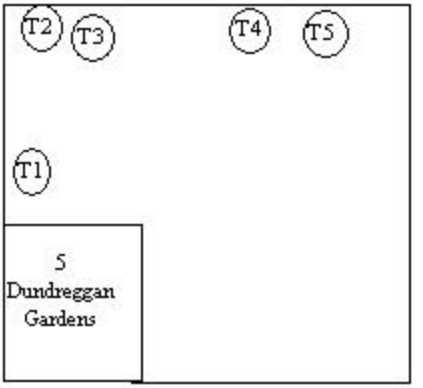

Dundreggan Gardens

RE: General tree maintanance -
T1 Birch - Remove 3 lowest branches on house side and reduce remaining mid-crown overhang
T2 Ash (possibly in decline) - Remove major dead wood
T3 Small Beech (supressed & poor form) - Fell
T4 Maple - Remove lowest primary branch on garden side and reduce remaining mid-crown overhang by 1 to 2m