

Site section AA 1:200

new tree planting

new shrub planting

900mm black metal railings


1.8m timber fencing with 300mm timber trellis

2.1m brick wall with timber panel fencing

Bin store and recyling facilities

Drainage

N

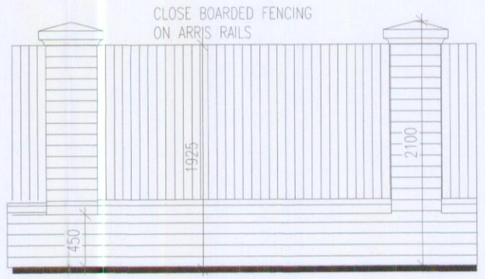

450mm HIGH BRICK WALL WITH PIERS

TREE PLANTING TO SITE

Amelanchier Arborea "Robin Hill"
Betula Pendula "Fastigiata"
Betula Pendula "Dalecarlica"
Fagus Sylvatica "Dawyck"

8no. TREES OF THE ABOVE MIXTURE

SHRUB PLANTING MIXES


SMALL/LOW GROWING SHRUBS

VINCA MINOR
EUONYSMUS EMERALD & GOLD
PRUNUS OTTO LUYKEN
SKIMMA JAPONICA
SPIREA GOLD FLAME
LAVENDER HIDCOTE
FUSCHIA

Footpaths to be Marshalls Saxon Buff paving

Driveways and parking areas to be Marshalls tegula permeable paving colour grey

PLANNING
ACK'D
REPLIED
RECD - 4 OCT 2010
INIT. | DATE
M
M
M
FOR ACTION

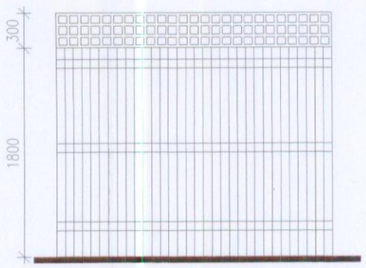

CLOSE BOARD FENCE 1800MM HIGH WITH 300MM TRELLIS

19MM DIA RAILINGS PAINTED BLACK



scale 1:50

Rev B Site section added
REV A FENCING AMENDED

REVISIONS

DRAWN	FH	SCALE	AREA SQ.M. SQ.FT.
DATE	July 10	1:250/ 1:50	

PROJECT: Pembroke Street, Cheetham Hill, Manchester M7

CLIENT: Styal Properties

TITLE: Landscaping Layout

HDD
Heathcote Design And Development
20 Macclesfield Road, Buxton. SK17 9AH
T: 01298 23199 M: 0787 5551825
E: hdd@talktalk.net

DRAWING NUMBER: 06.01 REV: B