CORNICE INSTALLED TO MATCH EXISTING
AND REINSTATED ABOVE STAIRS

EXISTING STAIR RETAINED AND
MOTHBALLED FOR POSSIBLE RE-USE


PAINTED STEEL RAILINGS
INSTALLED ACROSS FRONT
OF STAIRS

EXISTING WINDOWS
RE-INSTATED TO ALLOW
ADDITIONAL LIGHT TO
ENTRANCE

DECORATIVE TIMBER
PANELLING REFURBISHED
AND PAINTED

LIME PLASTER WITH PAINT
FINISH TO BE INSTALLED TO
WALLS

EXISTING FLOOR ALTERED
TO ALLOW NEW FLOOR
LEVEL AND STAIRS TO
ENTRANCE AREA

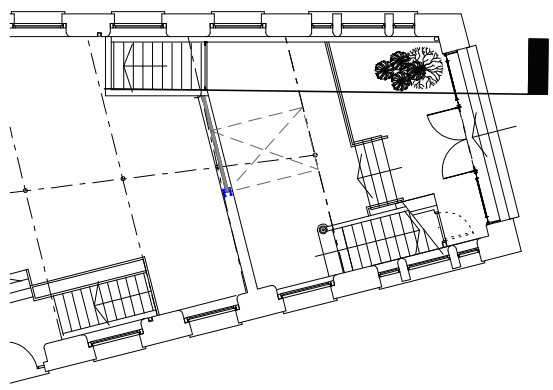

Section Key

F 05/09 Ground floor partition removed and painted steel railings installed across front of stairs
E 04/09 Basement partition centred on downstand beam
D 04/09 Ground floor partition centred on downstand beam and cornice detail reinstated above stairs
C 03/09 Existing staircase retained and entrance layout adjusted
B 12/08 glazed entrance and window detail amended
A 07/08 Signage lighting removed and glass balustrade added

linberg
design associates limited
1 - 5 The Downs, Altrincham Cheshire, WA14 2QD
(t) 0161 923 0396/0397 (f) 0161 923 0391 (e) mail@linberg.co.uk

Project Title :
Bradley House
Newton Street
Manchester M1
Mr Chowdhary

Drg Title :
Proposed right hand side entrance section

Drg No. : PP09
Revision : F
Scale : 1 : 100 @ A3
Drawn By / Date : JML