

Shepley Conservatories
Tel: 0161 339 2433
Fax: 0161 343 3684


CONSERVATORY LAYOUT





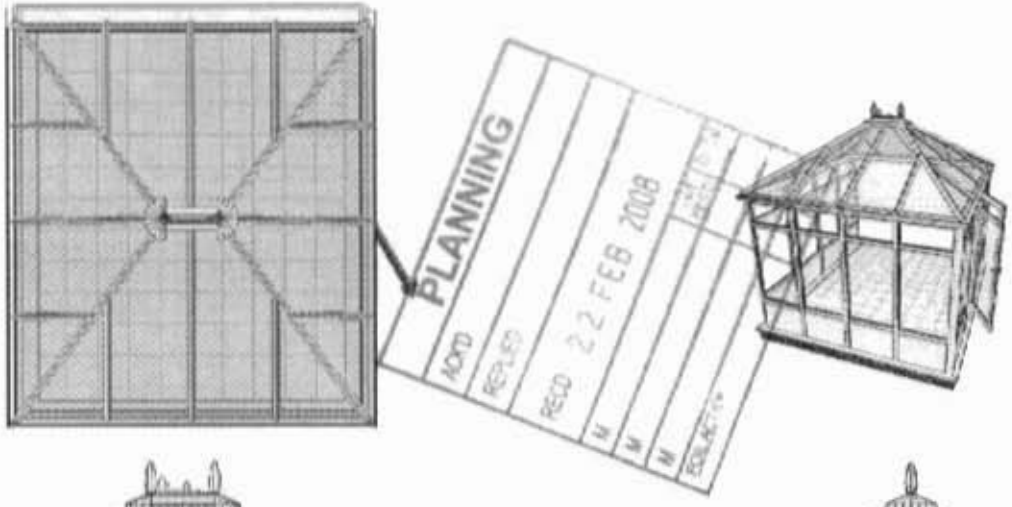

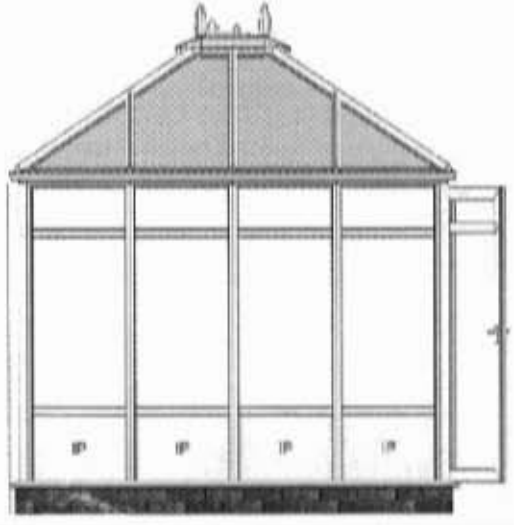

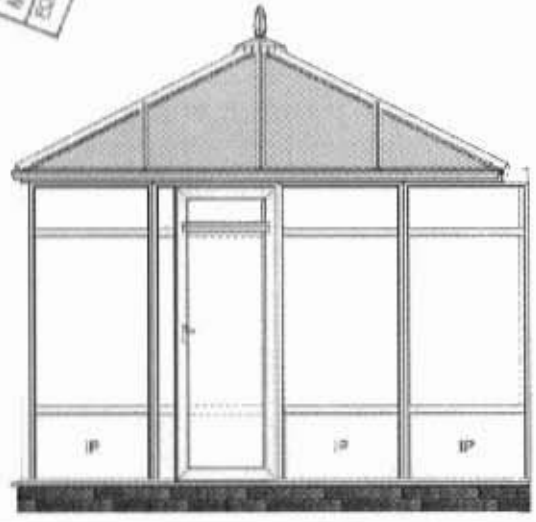

CUSTOMER DETAILS

Tel:

Fax:


ORDER DETAILS


Order Ref:	ULT291	**Projection**		**Span**		**Internal Colour:**	White
Date created:	04/02/2008	**Internal:**	3894	**Internal:**	3250	**External Colour:**	White
Drawn by:		**External:**	*3994*	**External:**	*3450*	**Glazing Material:**	25mm Clear Polycarbonate

Quotation





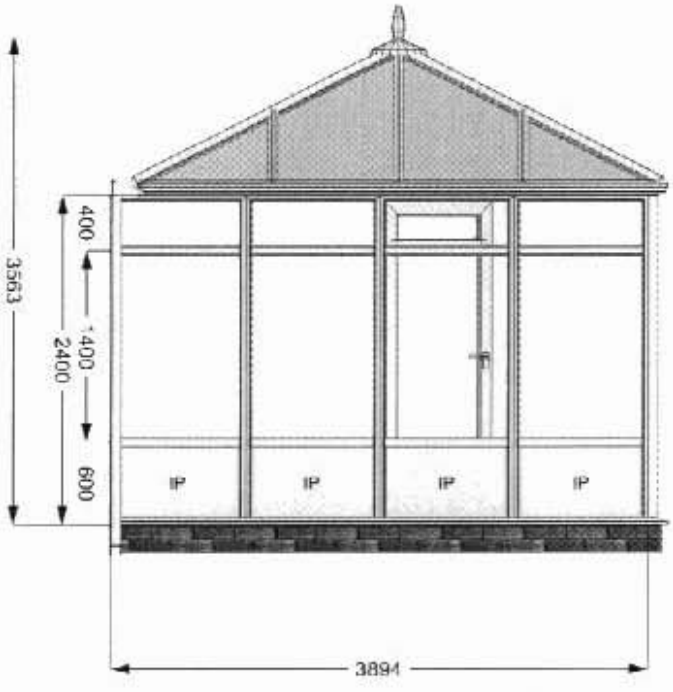

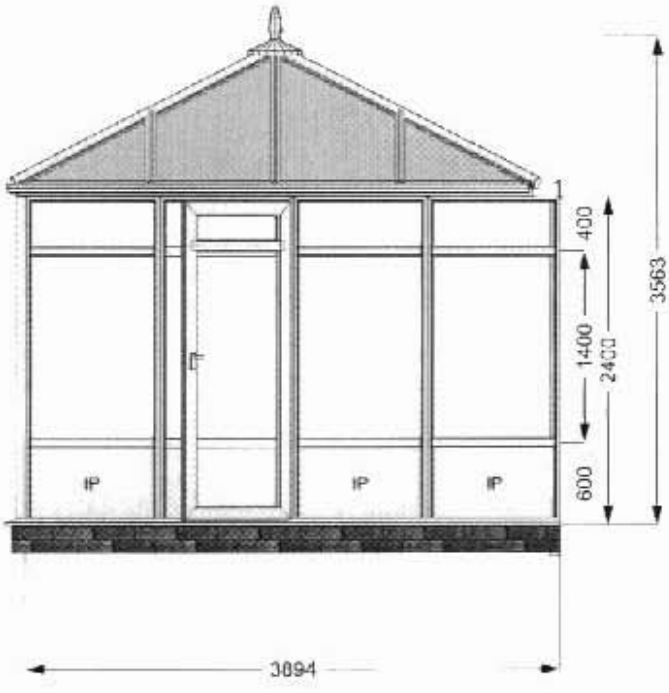


Span:	3250 mm	Drawn By:		RingBeam Type:	Light Eaves
Order Number:	ULT291	Volume:	33.66m³	Bar Material:	Aluminium
Projection:	3894 mm	Roof Colour:	White	Frame Profile:	Default 70mm
Customer:		Dataset:	Ultraframe Classic (Ultrafram	Options:	Roof System? - ULTRAFRAI
Pitch:	27.0°, 33.9°, 27.0°, 33.9°	Glazing Material:	25mm Clear Polycarbonate	Dwarf Wall Height:	0 mm
Reference:		Cresting:	Rennaisance	Notes:	
External Heights:	3563	Window Colour:	White	Cill Type:	
Delivery Date:	30/12/1899	Guttering:	White	Int. Window Colour:	White
Base Heights:	3371	Cill Colour:	White	Ext. Window Colour:	White
Price Ex Tax:	£2,061.64	Sheet Area:	14.12m²	Roof System:	Ultraframe Classic (Ultrafram
Floor Area:	11.25m²	Glazed:	True	Software Version:	6.7.1.416
Price Inc Tax :	£2,422.43	Bar Type:	7L	Int. Roof Colour:	White
Wall Area:	0.00m²	Hip Type:	7L	Ext. Roof Colour:	White

PLANNING
RECD 22 - 3 2000

Please Note: It is the responsibility of the fabricator to check all of the dimensions and the polycarbonate sheet sizes given within this software. It is also the responsibility of the fabricator/installer to ensure that all walls and supporting framework provide adequate lateral support to the roof. We can accept no responsibility for the overall structural stability of the finished conservatory.

DELIVERY DATE : 30/12/1899	JOB NUMBER :	R291	Shepley PVCU WINDOWS, DOORS & CONSERVATORIES
CUSTOMER :	BASIC PRICE :	£0.00	
REFERENCE :	:	%	
DELIVERY :	CARRIAGE :	£0.00	
ADDRESS :	TOTAL EX VAT :	£0.00	
:	VAT 17.5% :	£0.00	
	TOTAL :	£0.00	Shepley Conservatories

N.B. DIMS IN MM ARE INTERNAL FRAME SIZES (INCLUDING CORNER POST ALLOWANCE)

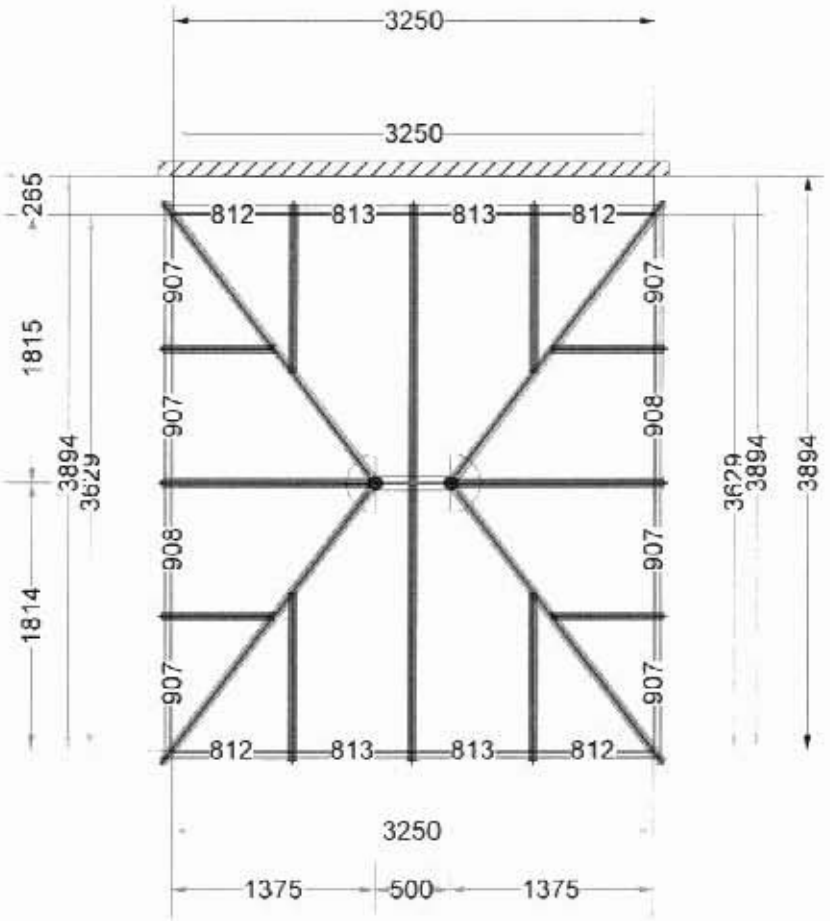

EXT / INT COLOUR	White	/ White	CRESTING / FINIAL	Rennaisance	/ Pikestaff
EAVES SYSTEM	Multi eaves		WALLPLATE / LENGTH		/ 0
EAVES / FIXING KIT	Light Eaves	/ None	ROOF VENT / POLE	None	/
DENTIL MOULDING	False		ROOF VENT DEPTHS		
RIDGE TYPE / LENGTH	MK5	/ 500	FRAME THICKNESS		
GLAZING MATERIAL	25mm Clear Polycarbonate		DWNPIPE POS. 1/2/3		
PITCH	27.0°, 33.9°, 27.0°, 33.9°		TIE BAR REPL. KIT	None	
O/A HEIGHT	1163		CONSERVAFLASH	False	
SELECT FASCIA	None (PFTB)		EXTRA GUTTERING	NO	
WHICH TOP CAP	Dome		BOX GUTTER ADAPTORS		
WHICH GBC	Round with jacks		VALLEY SUPER BOLSTER	No	

70 PLANNING
AMD / /
REPLACED
RECD 22 FEB 2008
M
FOLIATION

HAVE ANY OF THE DETAILS BEEN AMENDED YES / NO -

THE INSTALLER IS RESPONSIBLE FOR ENSURING THAT THERE IS ADEQUATE VENTILATION IN THE CONSERVATORY AND THAT ALL FRAMEWORK AND WALLS PROVIDE LATERAL SUPPORT IN LINE WITH BBA CERTIFICATE N0 96/3261. THIS SPECIFICATION IS BASED ON A MAXIMUM ALTITUDE OF 100M UNLESS AGREED OTHERWISE. SHEPLEY CAN ACCEPT NO RESPONSIBILTY FOR THE OVERALL STRUCTURAL STABILITY OF THE CONSERVATORY.
I CONFIRM THAT THE ABOVE DETAILS ARE CORRECT AND NOW PLACE AN OFFICIAL ORDER.

SIGNED: PRINT NAME: DATED:

PLEASE RETURN FAX TO:- 0161 3433685. ANY QUERIES PLEASE CALL 0161 3392433