

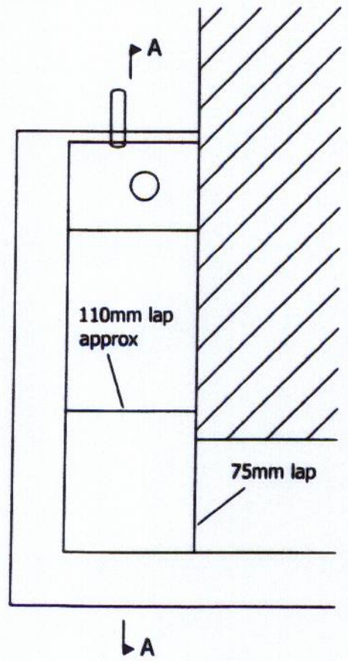




TOP VIEW

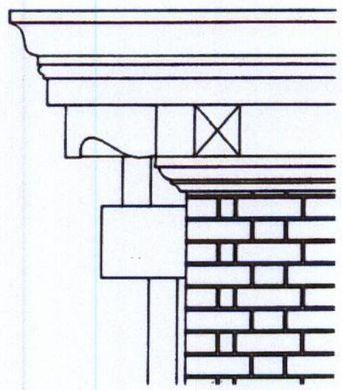

FRONT VIEW

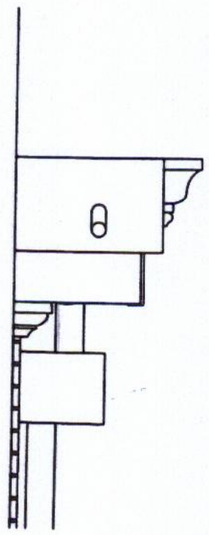


REAR VIEW

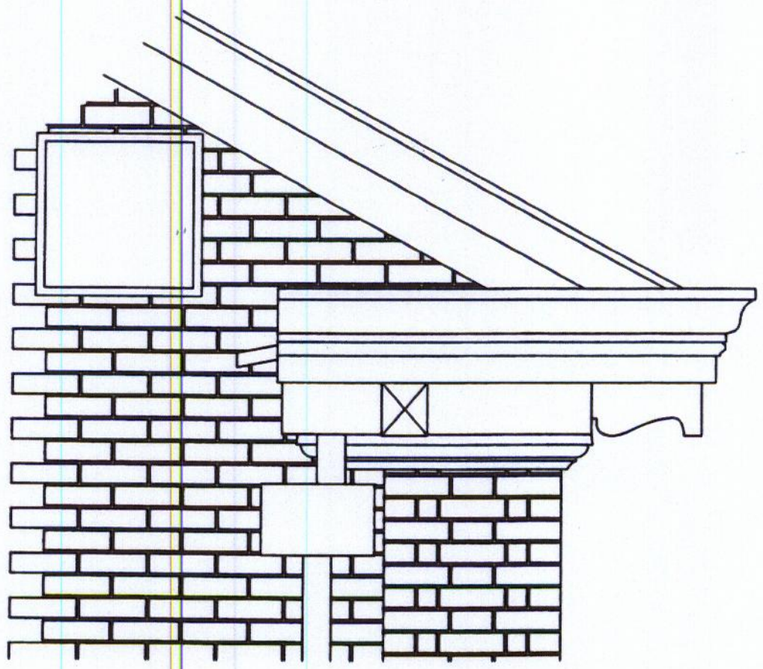

SIDE VIEW

1:20

Area marked red to be fully welded in code 5 lead.

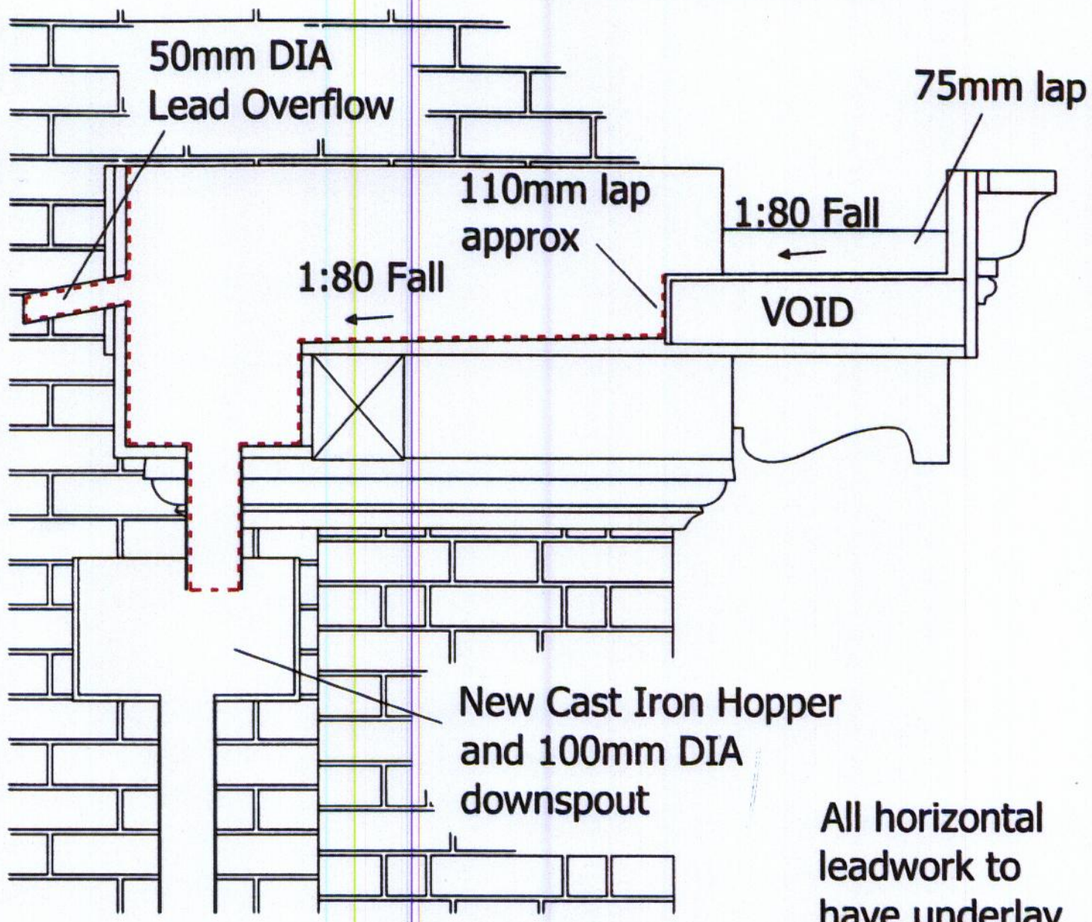


CROSS SECTION A-A

1:10

All horizontal leadwork to have underlay (Led-Trak Trevira).

PLANNING
ACK'D
REPLIED
RECD - 8 SEP 2009
DATE
M
M
M
FOR ACC'
M

| Drawn By: | Checked By: | Drawing Number: | Date: | Scale: |
|---|---|---|---|---|
| D Sidlow | G Maybank | HSBC1751/03 - REV A | August 2009 | 1:20, 1:10 |

Title: REPLACEMENT OF SECTION OF TIMBER BOX GUTTER - PROPOSED

Location: 13 Smedley Lane, Cheetham Hill, Manchester

Produced By: RYDER & DUTTON