


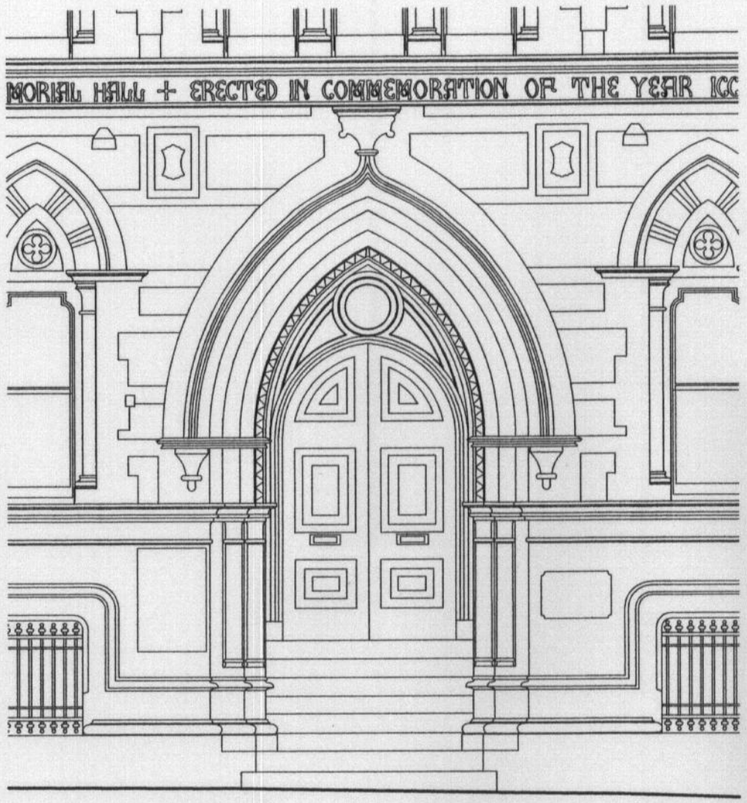


Existing Steps

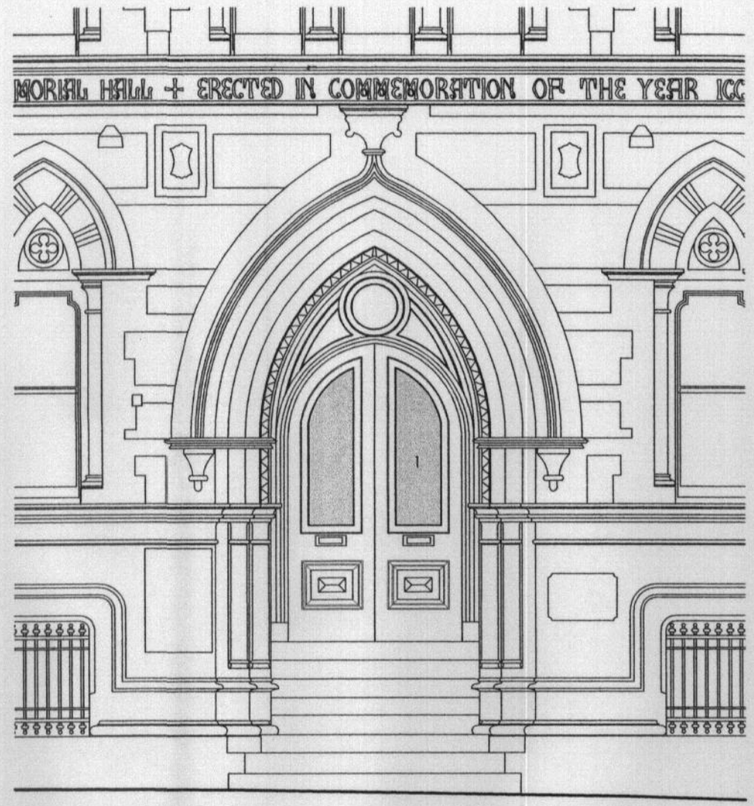

Proposed Steps

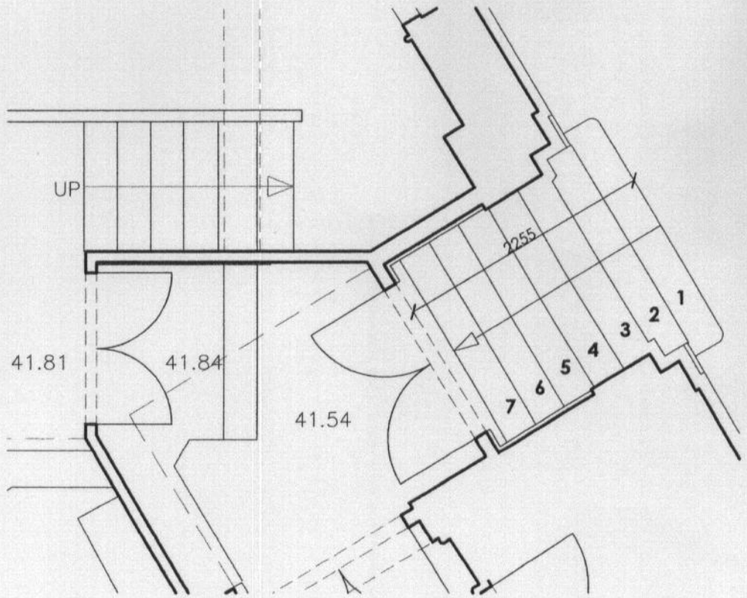

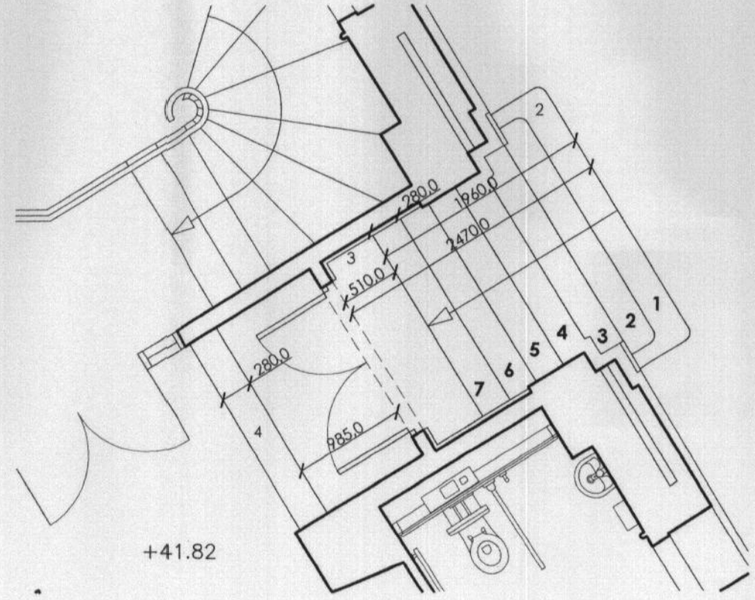

500 1000 1500mm
DO NOT SCALE - USE FIGURED DIMENSIONS ONLY

OMBLER IWANOWSKI ARCHITECTS
31 DALE STREET MANCHESTER M1 1EY
TEL 0161 236 6778 FAX 0161 236 6778
OMBLER.IWANOWSKI@ALLCOMM.CO.UK

1 Existing entrance doors to be refurbished, rehung & decorated, panels to be replaced, where shown, with glazed units to match the details on the internal Lobby doors. Existing panels and upper rail t be carefully removed & stored on.

2 Existing terrazzo covered steps to be concealed with new stone steps, to create extended landing to front of entrance doors.

3 Existing timber skirting to be replicated in (new raised) position.

4 New steps

PLANNING
ACK'D
REPLIED
REC - 4 DEC 2009

14 ALBERT SQUARE,
1 & 3 SOUTHMILL ST
REDEVELOPMENT FOR STAMPSCREEN LTD.

OI

PROPOSED EXTERNAL OFFICE DOOR AND ENTRANCE STEPS

21.09.05 SCALE 1:50 @ A3

P	L(20)030	A