

NOTE:DO NOT SCALE FROM THIS DRAWING.ALL DIMENSIONS TO BE CHECKED ON SITE.TO BE READ IN CONJUNCTION WITH ALL RELEVANT CONSULTANTS DOCUMENTATION

Rev	Date
A - 30MIN PYROGLASS NOTE ADDED	04/02 /16
B - SECTION ADDED	14/02 /16

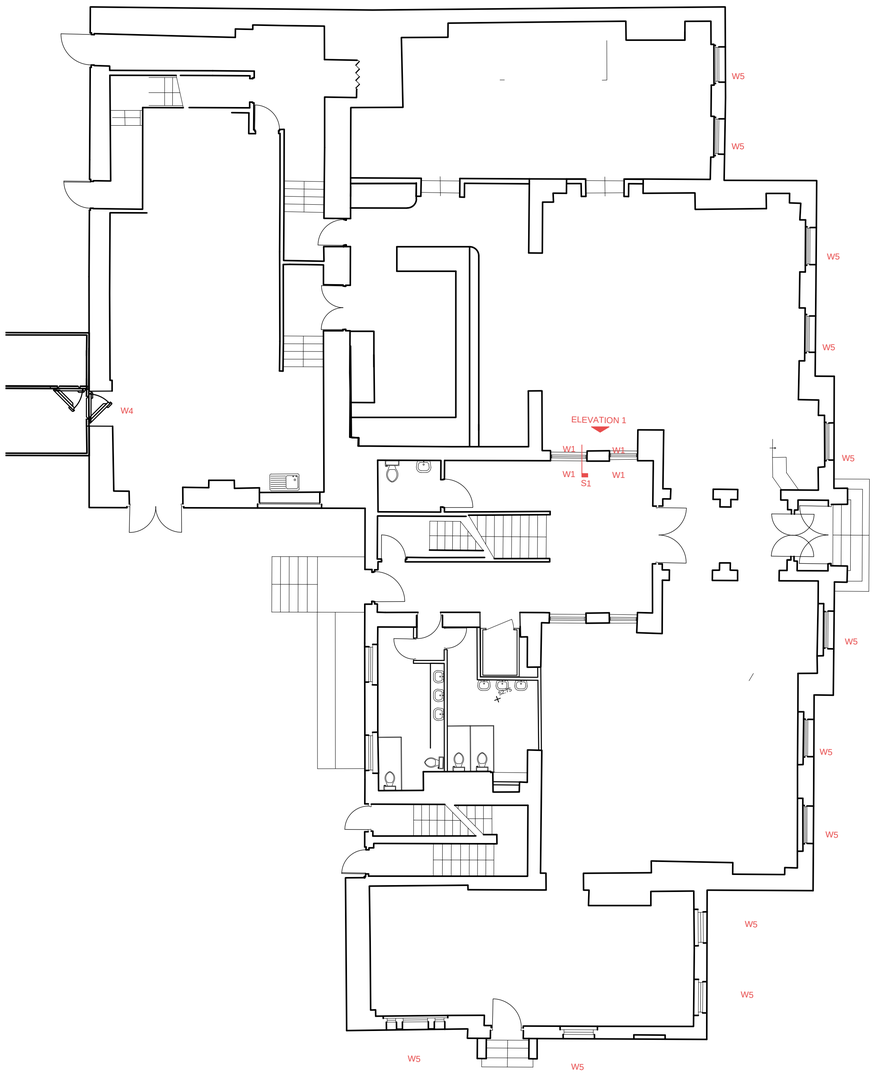

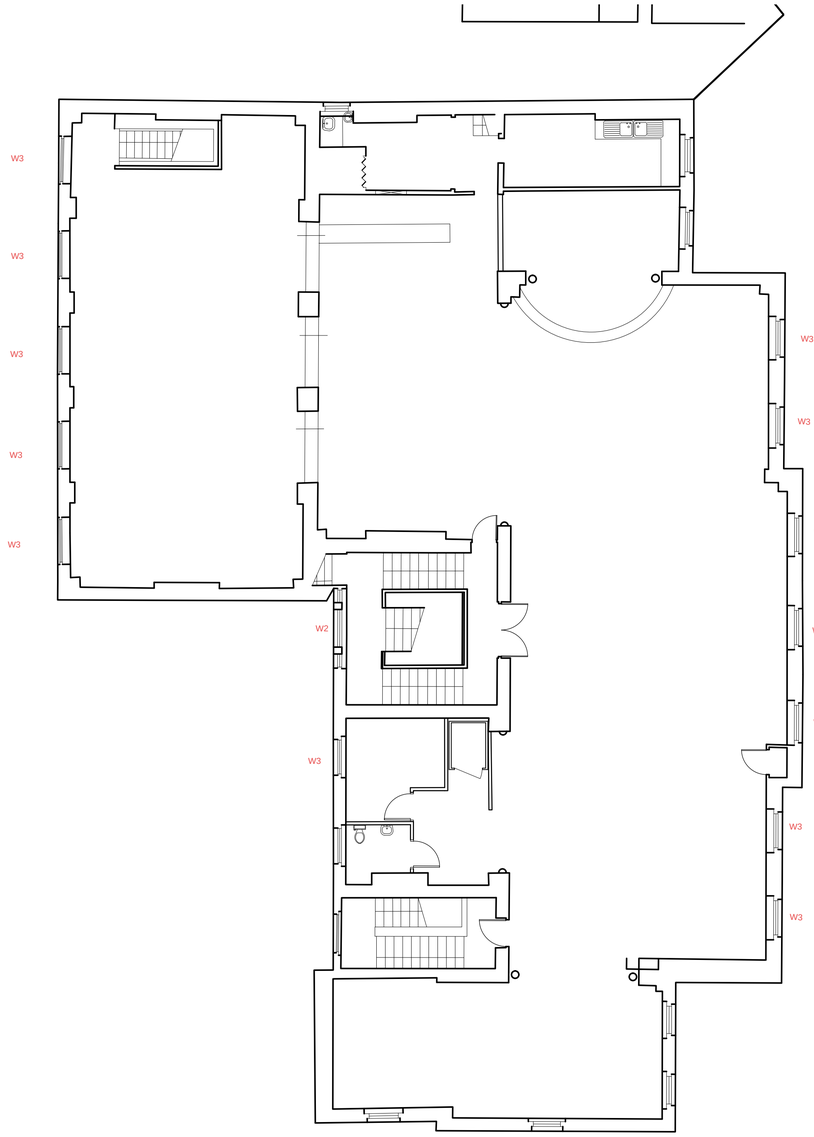

PR GF WINDOW SCHEDULE 1 : 100 @ A 1

ALL EXISTING WINDOWS ARE TO BE RETAINED WITH EXISTING BLINDS.
EXISTING BLINDS TO BE PROTECTED AND CLEANED DURING WORKS.

KEY
GROUND FLOOR
W1 - EXISTING DOORS TO BE CAREFULLY REMOVED AND WINDOWS TO BE PUT IN THEIR PLACE. SEE ELEVATION 1 FOR DETAIL


W4 - EXISTING WINDOW TO BE CAREFULLY REMOVED AND REPLACED WITH COLD STORE DOOR. CONTRACTOR TO BUILD UP EXTERNAL WITH MATCHING BRICKWORK WEHRE NECESSARY

W5 - ALL EXISTING BLINDS ARE TO REMAIN. ALL TO BE PROTECTED DURING WORKS AND CLEANED.


FIRST FLOOR
W2 -EXISTING BRANDED VINYL TO BE CAREFULLY REMOVED

W3 - ALL FIRST FLOOR WINDOWS TO RECEIVE NEW DRESS CURTAINS TO REPLACE EXISTING;
REF: TBC

PR FF WINDOW SCHEDULE 1 : 100 @ A 1

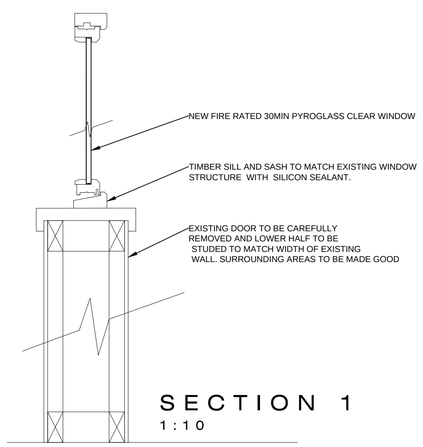

SECTION 1
1 : 1 0

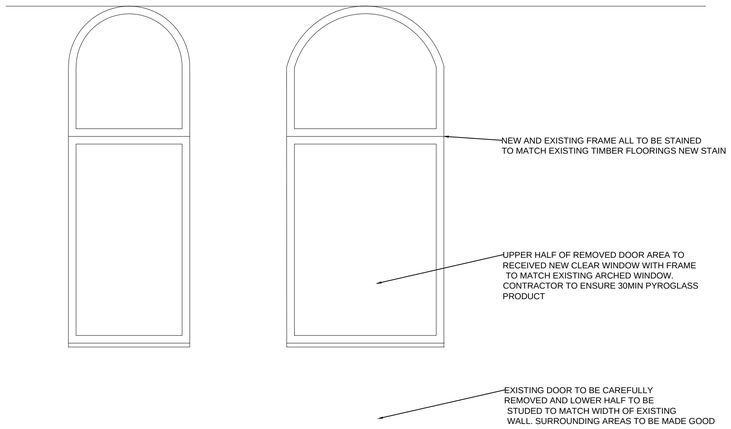

ELEVATION 1
1 : 2 0

m 0 1 2 3 4 5 6 7 8 9 10
SCALE
1:100

DV8DESIGNS
T: 01925 850288 F :01925 850288
Lovell House → Birchwood Park → Warrington → Cheshire → WA3 6FW

Client →	Project →	Drawing →
PRIVATE CLIENT	BUKHARA, (FORMER CHEETHAM HILL TOWN HALL)	PR WINDOW SCHEDULE - GF & FF
Drawn By → LM	**Date** → JAN 2016	**Scale** → VARIES@A1
Project No → 1564	**Draw No** → 704	**Revision** → B