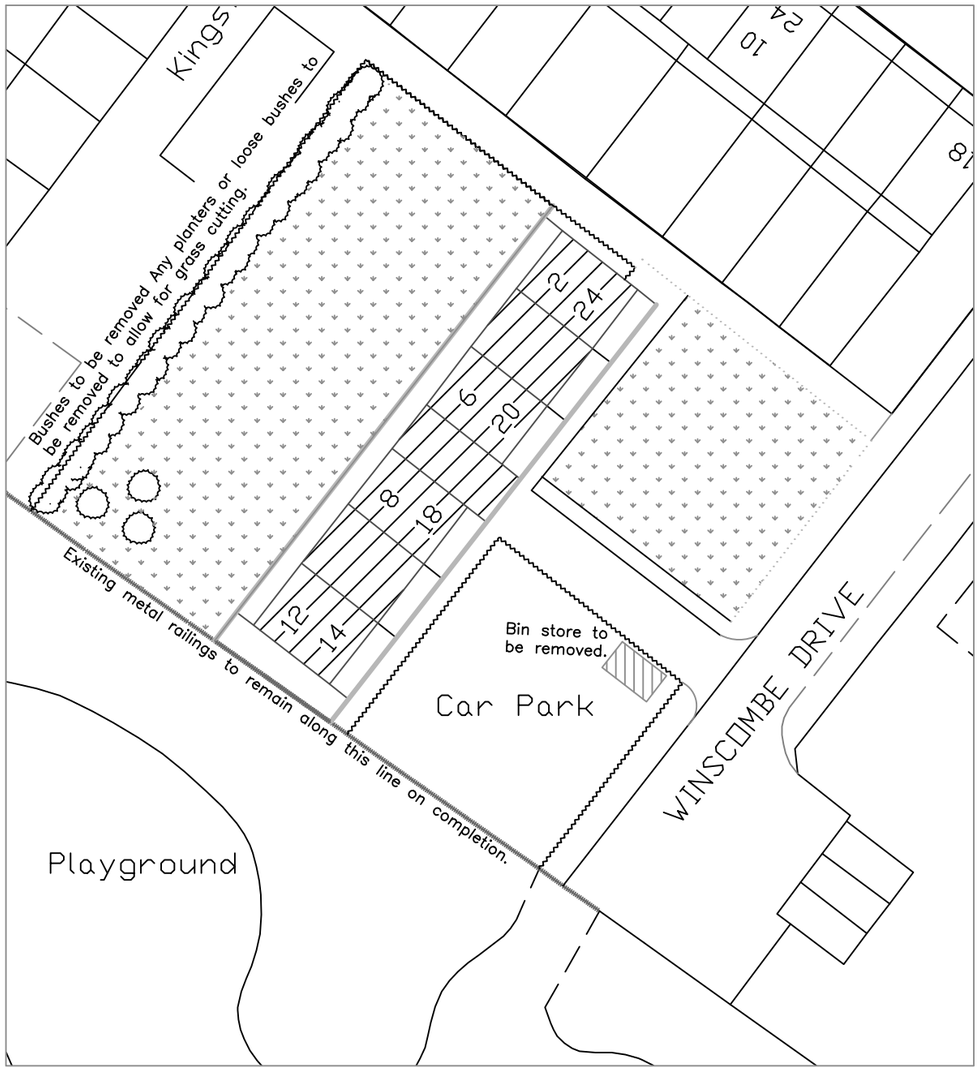

Existing Block 15 – 2–24 Winscombe Drive

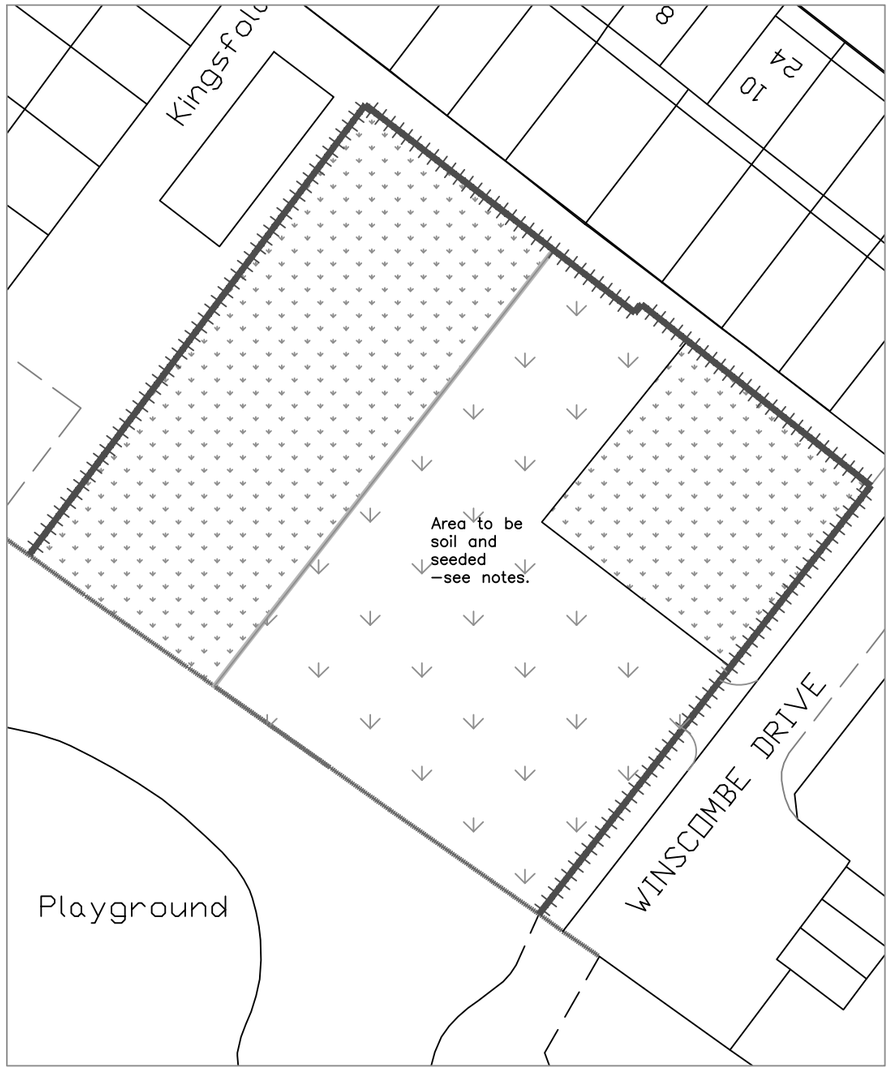

Proposed Block 15 – 2–24 Winscombe Drive

N

KEY

- Existing grass to remain on completion, cut and maintain for 2 years, 6 cuts per year.
- 150mm topsoil on 350mm subsoil, seed, first cut, maintain for 2 years, 6 cuts per year.
- Existing 2.1m high metal railings to remain on completion.
- Existing 2.1m metal railings to be removed.
- Existing low level wall to be removed.
- Knee rail 'C' with concrete mowing strip – see drg. 99/06.

FOR NOTES AND DETAILS SEE DRAWING 99/106.

FOR PRE–START BOUNDARY CONDITIONS, SEE DRG 99/110

PRELIMINARY

This drawing has been reproduced from the Ordnance Survey mapping with the permission of The Controller of Her Majesty's Stationery Office Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings.

Rev	Description	Date	by	chkd

MANCHESTER CITY COUNCIL
Corporate Technical Services Group
4th floor Heron House
47 Lloyd St
Manchester
M2 5LE

JOB TITLE: COLLYHURST MAISONETTES BUILDING RECYCLING

DRAWING TITLE: Proposed Site Details

COMPUTER FILE	DATE	SCALE	DRAWN	CHECKED
	22/07/13	1:200@A1	ML	

JOB NO.	DRAWING NO.	REVISION
HO/39770	99/112	