

Proposed Works

All the below:carefully removed without disturbing original features.

1. non original timber stud wall carefully removed
2. non original stair, office and steel column (supporting non-original trimmed opening) carefully removed. Trimmed opening to filled in in accordance with engineer's details.
3. non original MF ceiling carefully removed to expose ceiling joists. On removal ceiling to be inspected and either repaired or be the subject of a further listed building application
4. New steel and glass staircase in trimmed opening on site of former staircase
5. None original steelwork supporting none original staircase carefully removed

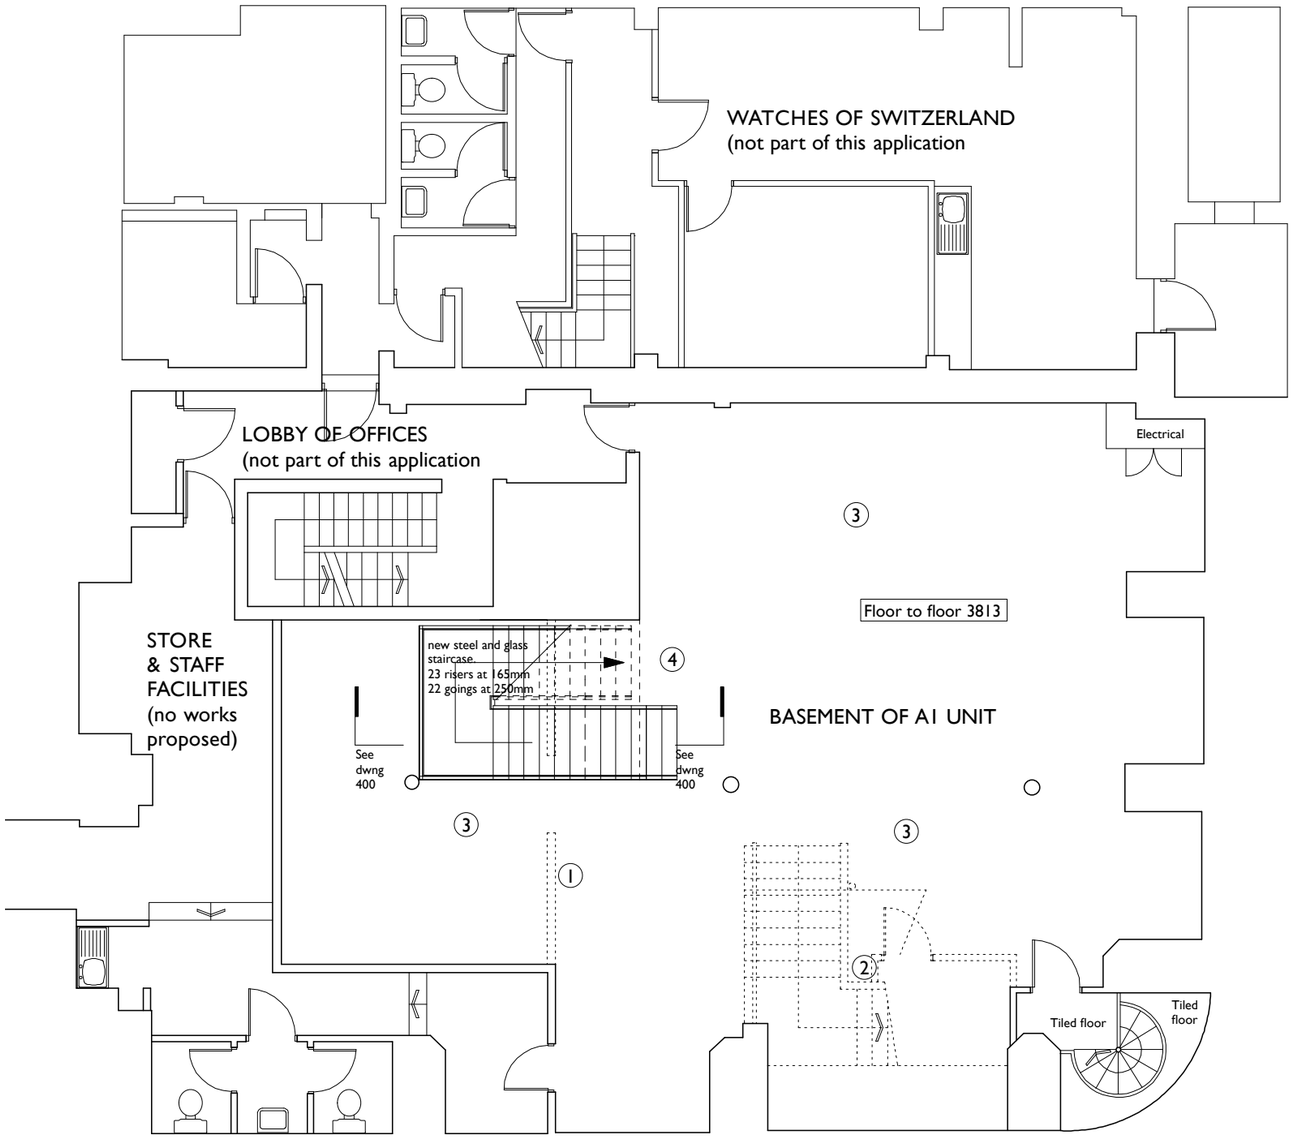

Basement Floor

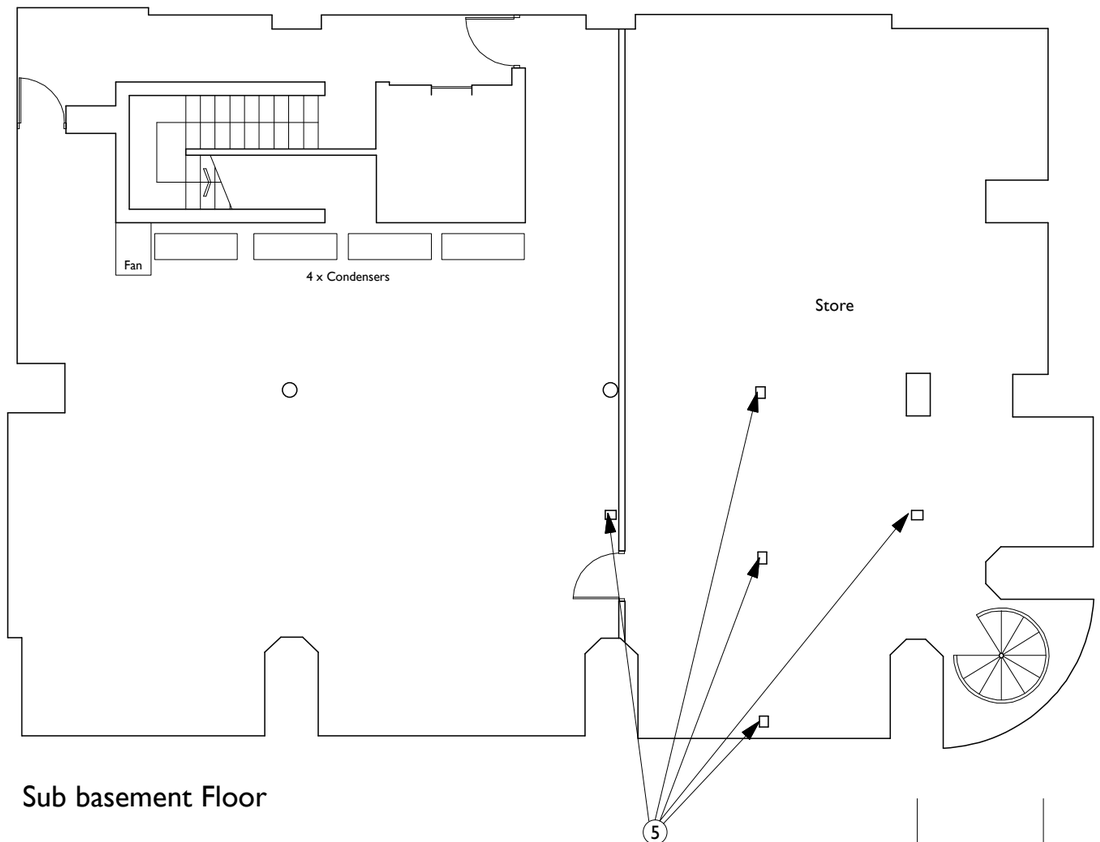

Sub basement Floor

description	date	rev
-	-	-

13-15 King Street

Basement Floor Plan
Cat A enabling

scheme 1502
no. **P(111)**
rev
scale **1:100@A3**
date April 2013
drawn SS

atelier MB
URBAN ARCHITECTS & DESIGNERS
www.ateliermb.co.uk
t 0161 236 0051
architect@ateliermb.co.uk

COPYRIGHT OF ATELIER MB LTD
DO NOT SCALE FROM THIS DRAWING
DIMENSIONS TO BE CHECKED ON SITE

SK sketch P proposed T tender C construction AB asbuilt