
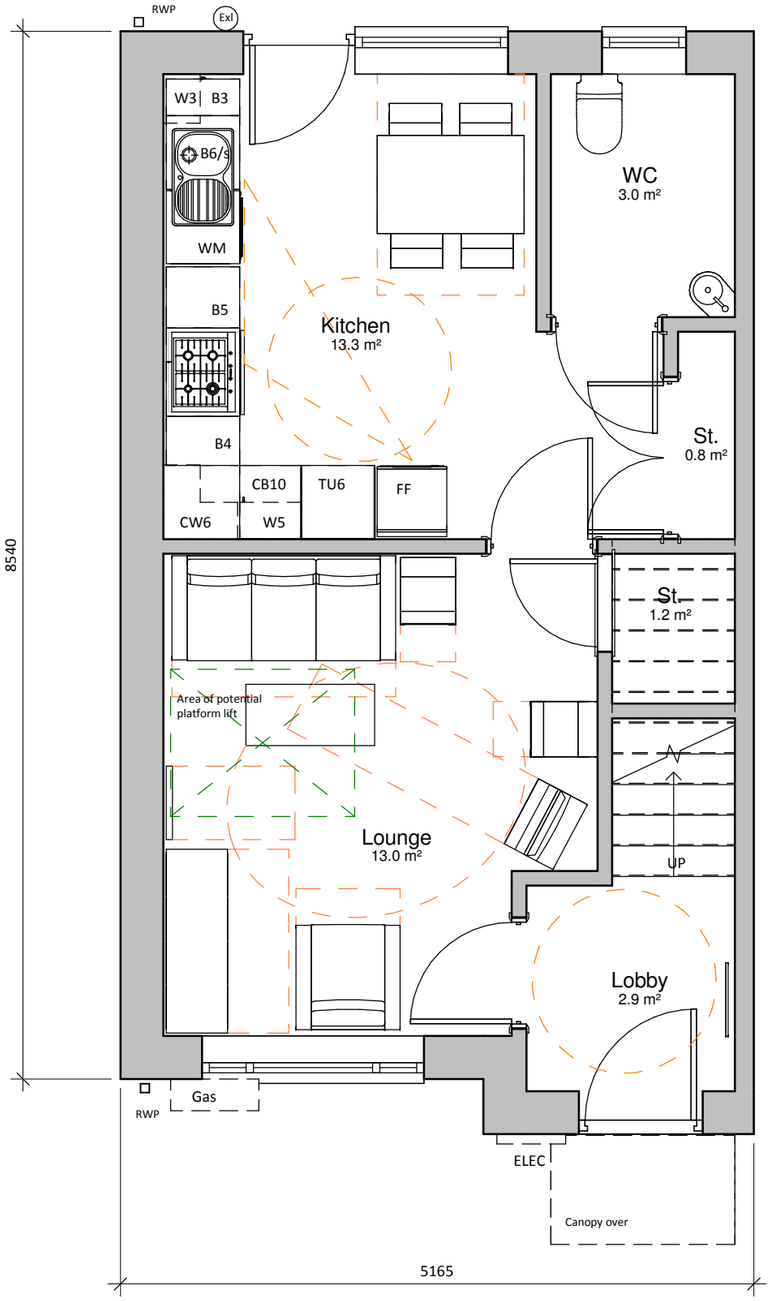



# Ground Floor

1 : 50

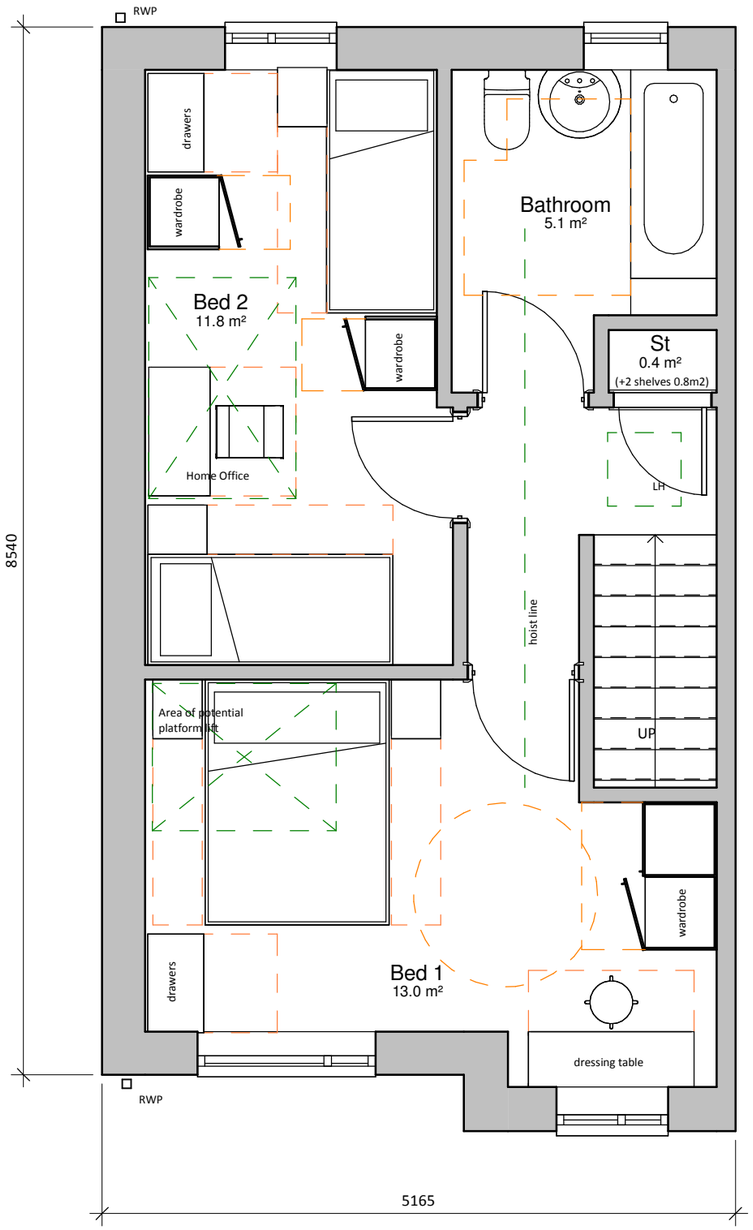


# First Floor

1 : 50

GENERAL NOTES

ExL = External light
Meters G= Gas E= Electric / CU Consumer Unit
Smoke detector (SD)
Shed Required 3.0sq.m.
Vents to store doors included

KEY TO SYMBOLS

bt = Bedside table
wm = Washing machine
dw = dishwasher
T = Tray space
B = Boiler
s = sink
sh = Shower
RWP = Rain water downpipe
SVP = Soil vent pipe
WFB = Wall mounted bathroom extract fan
WFK = Wall Mounted Kitchen extract fan
WBF = Wall Mounted boiler flue

Tu5 = 500mm Tall unit
B3 = 300mm base unit
B4 = 400mm base unit
B5 = 500mm Base unit
CB10 = 1000mm corner base unit
W4 = 400mm wall unit
W5 = 500mm wall unit
CW6 = 600mm corner wall unit

UNIT FLOOR AREA CALCULATION

| | |
|---|---|
| Ground Floor Basic shell | 37.13sq.m. |
| Door recesses | 0.30sq.m. |
| 1. TOTAL | 37.43sq.m. |
| First Floor basic shell | 37.31sq.m. |
| 2. TOTAL | 74.74sq.m. |
| OVERALL UNIT TOTAL | sq.m. (1&2 ABOVE) |
| Storage | 3.2 sq.m. |
| Kitchen storage volume | 2.12 m.3 |

Floor areas allow for internal finishes and thus are net habitable areas

External and party walls are set at 353mm including internal finishes

Internal partitions set at 100mm thick. 75mm stud plus finishes each side

| Rev | Date | Int | Description |
|---|---|---|---|

Bernard Taylor Partnership ARCHITECTS

Client: WCHG

Job No: 2651

Scale @ A3: 1 : 50

Project: AHGP

Description: Typical Floor Plans - Type K (2B4P)

| Drawn By: | Checked By: | Date: | Drawing No: | Rev: |
|---|---|---|---|---|
| VG | CS | 16/08/13 | HT550 | |

DO NOT SCALE FROM THIS DRAWING
ALL DIMENSIONS MUST BE CHECKED ON SITE BY CONTRACTOR PRIOR TO CONSTRUCTION

Elizabeth House, 486 Didsbury Road, Heaton Mersey, Stockport, SK4 3BS
t 0161 443 1221 f 0161 442 1672 e info@bernardtaylor.co.uk
www.bernardtaylor.co.uk