
EXTERNAL SECURITY WALL CONSTRUCTION

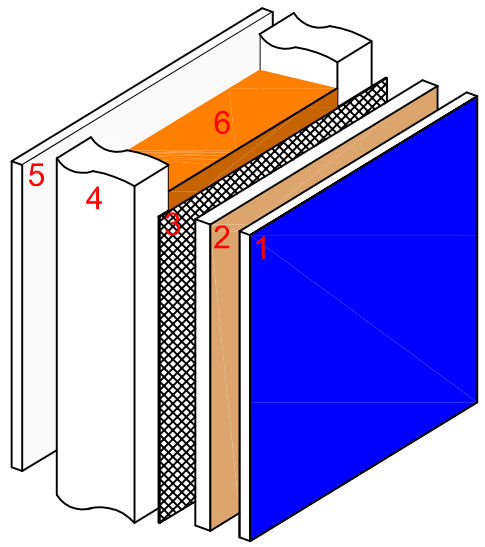

1/ LAMINATE PANEL (COLOUR CHOICE)

2/ 18mm MDF (SCREWED TO STUDWORK)

3/ EXPERMET (REF: 2074F)

4/ 100 x 50 STUDWORK (@ 400 ctrs)

5/ 15 WHITE MELAMINE

6/ 100 INSULATION

Date: 07-08-12

newwave Installations

Hope Street, Rotherham S60 1LH