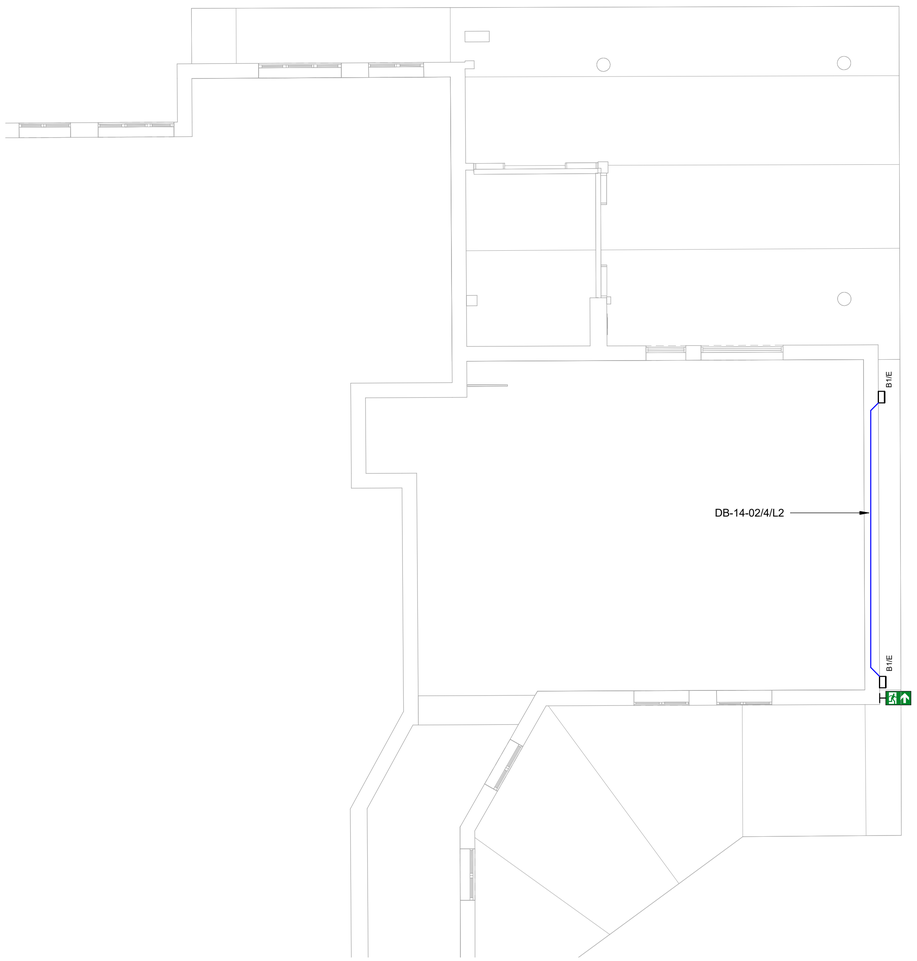


A1

Notes

1. This drawing should be read in conjunction with other design documentation and all other supporting technical information.
2. This drawing is based on the Existing hospital drawings received on 22/06/2020.
3. All dimensions in mm unless otherwise stated.
4. Do not scale from this drawing.
5. This drawing forms part of the BSRIA Work Stage 4A Techincal Design Part 1 package.
6. Refer to Luminaire Schedule 23133-ARP-ZZ-01-SH-E-01001 for the lighting fixture details.
7. Refer to the Distribution Board Schedule 23135-ARP-ZZ-XX-SH-E-00003 for final circuiting requirements.
8. Services within (and on the outside of) the containerised generator shall be provided by the generator manufacturer in co-ordination with the Contractor and Authorising Engineer.
9. This drawing is to be read in conjunction with the following documents:
 Major Plant Item Procurement Specification 2315-ARP-DZ-XX-SP-E-0001
 MEP Particular Specification 2315-ARP-DZ-XX-SP-E-0002
10. The installation shall be installed in accordance with BS7671, with all containment installed as per the manufacturer's guidelines.
11. Sockets installed shall comply with Approved Document Part M.
12. All installation heights and setting-out dimensions are indicative only, for verification on site by the Contractor.

Legend

	Distribution Board
	LV Switchboard
	Double Socket - Switched - Recessed
	Fused Connection Unit - Switched
	Fused Connection Unit - Unswitched
	Data Outlet
NG/N	Light Switch
	Lighting Circuit
	Small Power Circuit
W/P	Weather Proof
CCTV	Closed Circuit Television Camera
H/L	High Level
FAP	Fire Alarm Panel
ACP	Access Control Panel
MFSD	Motorised Fire Smoke Damper
AC	Access Control
EH	Electric Heater
RMU	RMU Battery Tripping Units

REV.	DESCRIPTION	DATE	DRW.	CHK.
P01	RIBA Stage 4	22/11/24	MG	TW

Manchester University NHS Foundation Trust

APPOINTED PARTY LOGO/INFORMATION

ARUP
6th Floor, 3 Piccadilly Place
Manchester M1 3BN
Tel+44(0161) 228 2331
www.arup.com

PROJECT
North Manchester General Hospital
WP06 - Relocation of Substation 10

TITLE
Electrical Services
K Block
External Lighting and Small Power Drawing

STATUS	PURPOSE OF ISSUE
S2	Suitable For Information

DRAWN BY	CHECKED BY	DATE
MG	TW	22/11/24

SCALE (@A1)	PROJECT NUMBER
1 : 100	276353

FILE DRAWING NUMBER	REV.
23135-ARP-ZZ-XX-DR-E-05002	P01

22/11/2024 18:01:26