

C9 - PERFORATED ROLLER SHUTTERS /
P03

COLOUR: DARK GREY


18 Kenyon Lane
Manchester
M40 9JQ

142948/FO/2025



SALEM
ARCHITECTS

KENYON LANE

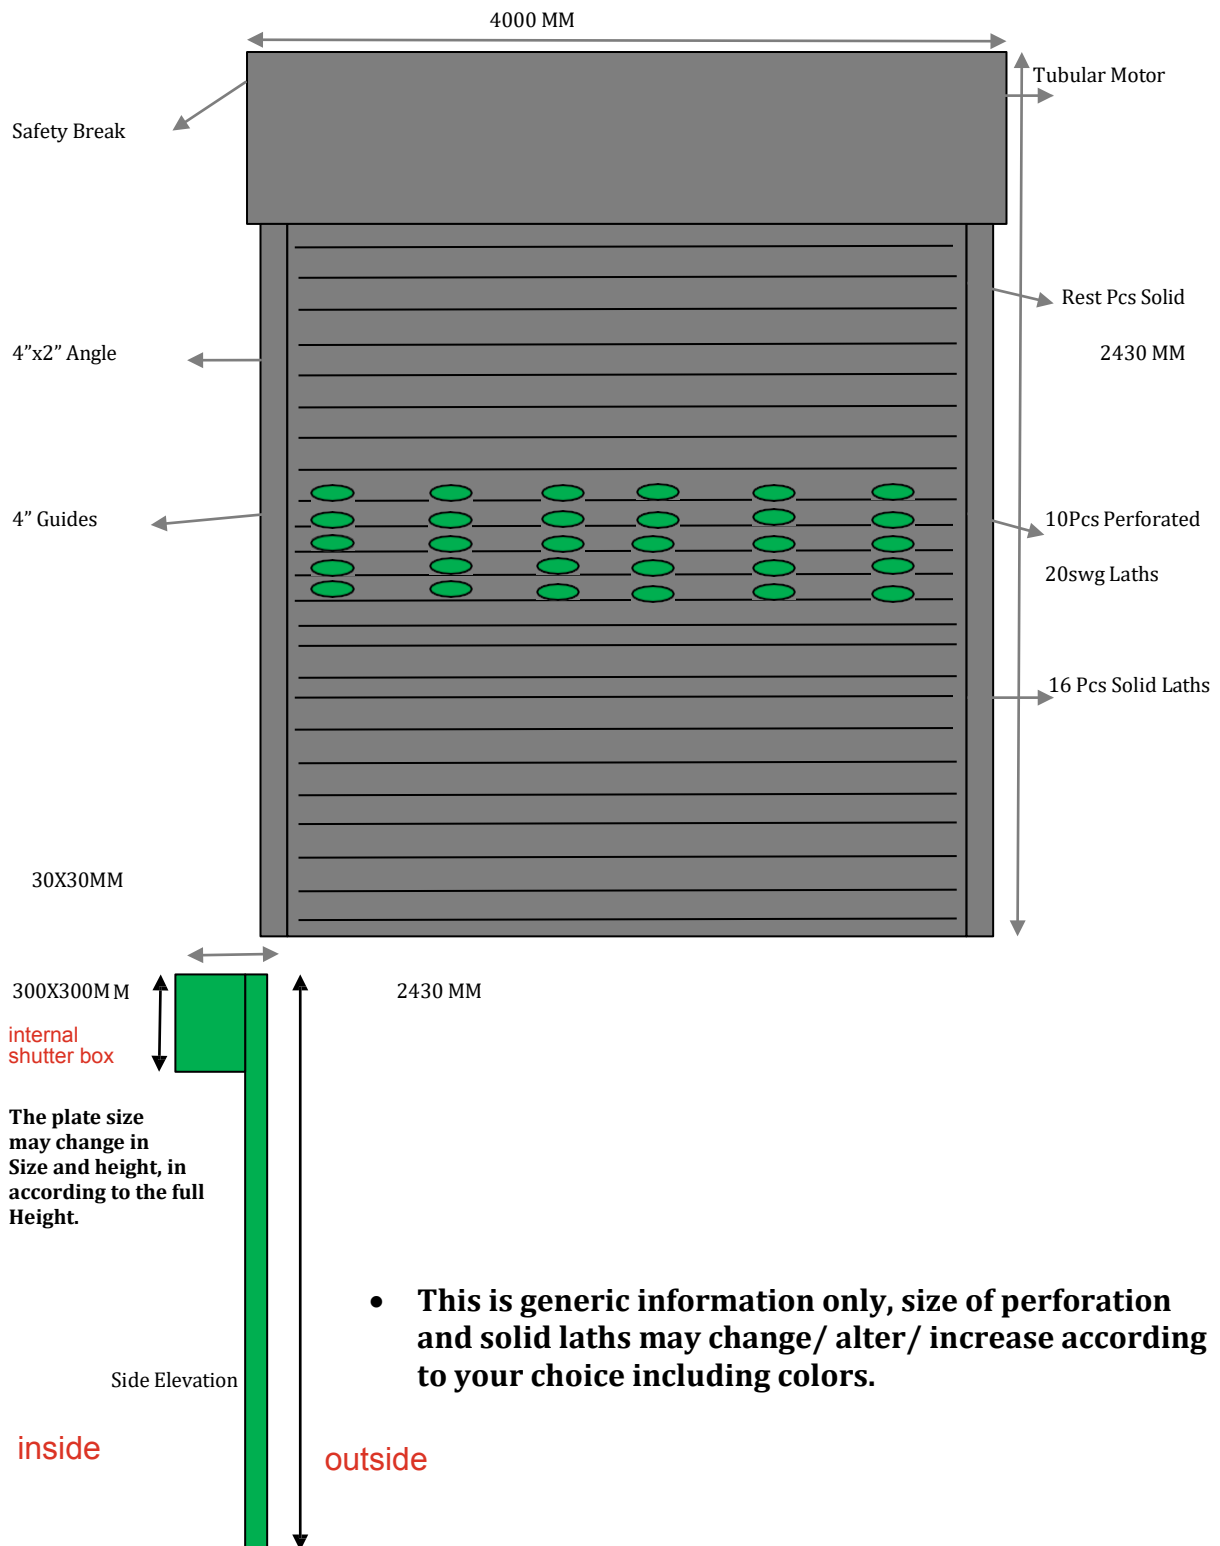



Electric Roller Shutter Technical Specification's

As per your requirements please find the specifications and layout for the proposed development on your site.

- ❖ There will be more number of the electrical roller shutter similar to the attached layout.
- ❖ Entire open space will be covered with electric roller shutters.
- ❖ Roller Shutters will have powder coated solid laths 22 swg.
- ❖ Roller Shutter will have Powder Coated 20 SWG perforated laths approx. 01 Mtrs above the ground level and rest Solid Laths.
- ❖ Roller Shutters will be operating on electric Tubular Motor (Industrial).
- ❖ Roller Shutters will have Manual rolling handle it helps rolling the shutter manually in case of electric failure.
- ❖ Roller Shutters will have infrared Safety beam sensors to prevent the shutter from rolling automatically in case of any object comes under the safety beam area.
- ❖ Roller Shutters will have T-Rail Installed at the Bottom it enhances the shutter strength.
- ❖ Flag Plates will be covered with U Shaped Canopy, from inside the building.
- ❖ We will use 4"x2" Angles to make flags.
- ❖ We will use 4"x2" Guides for the curtain track being extra wide they help to run shutter smoothly and for extra safety.
- ❖ All the Shutters will be powder coated in RAL color (recommended by the project) shade.
- ❖ As per new legislation requiring all shutters to comply with the Construction Products Directive(C.P.D) all doors are designed, manufactured and independently tested to meet the requirement of BS EN 13241:2003.
- ❖ If you need any further information please do not hesitate to contact us.

Thanks and Regards

Sales Department ABI Steel Works LTD.
sales@abisteelworks.co.uk
[Tel:01616299482](tel:01616299482)
Mob: 07413482863