
FUJITSU | AIR CONDITIONING

Product Data Sheet

AOYG09KMCC

Please visit our webstore for full product and technical documentation

Nominal Cooling Capacity	(kW)	2.5
Nominal Heating Capacity	(kW)	2.8
Height	(mm)	541
Width	(mm)	663
Depth	(mm)	290
Weight	(kg)	22
Airflow Rate - Cooling - High	(m3/h)	1650
Airflow Rate - Heating - High	(m3/h)	1450
Sound Pressure Level - Cooling - High	(dB(A))	46
Sound Pressure Level - Heating - High	(dB(A))	46
Sound Power Level - Cooling - High	(dB(A))	61
Sound Power Level - Heating - High	(dB(A))	62
Refrigerant Type (Global Warming Potential)		R32 (675)
Liquid Pipe Size		1/4"
Gas Pipe Size		3/8"
Min - Max Pipe Length	(m)	3 - 20
Max Height Difference	(m)	15
Refrigerant Charge (kg)	(kg)	0.6
Refrigerant CO2eq-T		0.405
Precharged For	(m)	15
Additional Charge (g/m)	(g/m)	20
Unit Power Supply		1Ph-230V-50Hz
Suggested Fuse Size	(A)	10
Cooling Mode Minimum Ambient	(°C)	-10
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-15
Heating Mode Maximum Ambient	(°C)	24

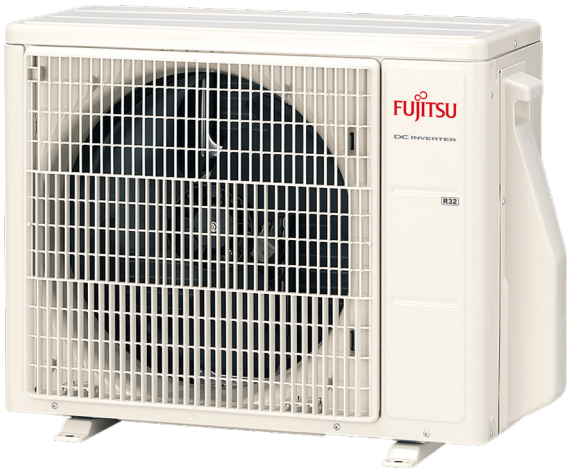


Document Downloads


Accessories
Airflow
Capacity Correction
Charging Details
Controls & Accessories
Design & Technical Manual
Dimensional Drawing
Electrical Characteristics
Installation Manual
Installation Space
Noise Curve
Product Image
Refrigerant Circuit
Spare Parts List All Pages
Specifications
Wiring Diagram

Related Items

ASYG09KMCC 2.5kW Wall Mounted Indoor Unit - R32

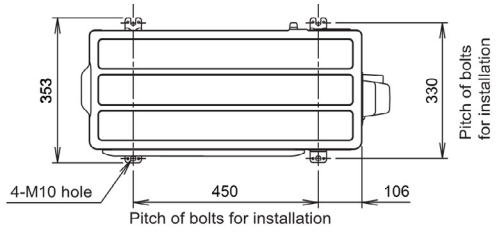

Top view

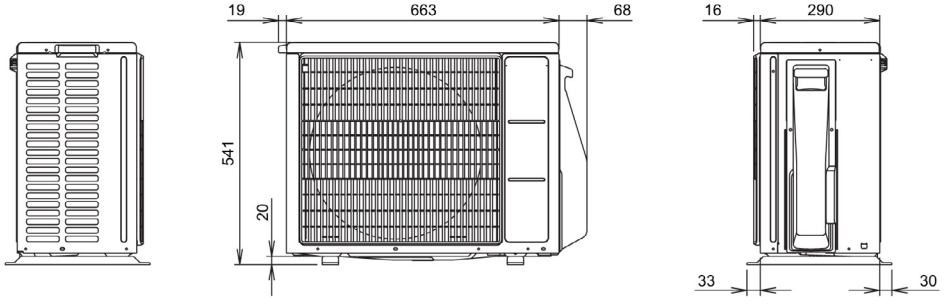

Side view | Front view | Side view

Units: mm

•Specifications and design are subject to change without notice for further improvement.
•Actual products' colors may be different from the colors shown in this printed material.

FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED
Unit 150, Centennial Park, Centennial Avenue, Elstree, Borehamwood, Herts, WD6 3SG
www.fujitsu-general.com/uk
sales@fgac.fujitsu-general.com
Tel: +44 (0) 208 731 3450 Fax: +44 (0) 208 731 3451