ORMANDY DESIGN GROUP
CHARTERED ARCHITECTURAL TECHNOLOGISTS
INTERIOR DESIGNERS

Date: 8 July 2024

Application number: 139207/FO/2024

Condition Discharge Application : Pre-Commencement Conditions

Proposal: Erection of single storey front and side extension.

Location: 172 To 176 Great Western Street, Manchester, M14 4SN

Date of application: 9 April 2024

Condition.3 & 5 Materials Description: Galvanised steel roller shutter design (perforated)

Colour Red RAL 3028






Technical Info:

The standard finish for the proposed roller shutters is 22 gauge galvanised steel. All guides, canopies, flags and L rails etc. are also galvanised steel for a long lasting, effective operation cycle, ensuring the longevity of your roller shutter. The roller shutter to have a coloured/powder coated finish and we offer any RAL 3028 (RED) colour. Locking of manual roller shutters is by bullet locks. Manually operated roller shutters with a 100mm roller shutter lath

Roofing Material: Blue/Black Concrete Roofing Tile



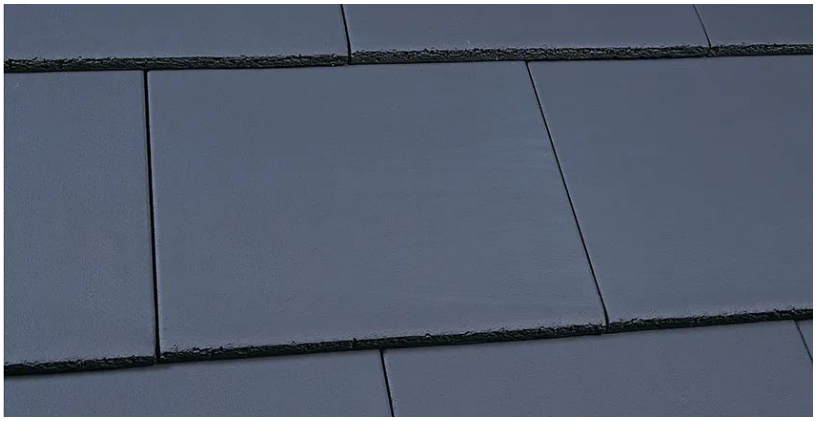

CIAT
CHARTERED PRACTICE

Ormandy Development Group Limited T/A Ormandy Design Group
Jahro, 9 Delaford Avenue, Worsley, Manchester, M28 2QS, England
e: connect.odg@outlook.com
m: + (44) 07815 301 879

CSD
REG NO. 004546

Condition 6. Operational Hours – Amendments to Operational Hours

Monday - Thursday 08.30 - 18.30

Friday – 08.30 - 12.45

Saturday - 09.00 - 18.00

Sunday and Bank Holidays 10.00 - 17.00

ORMANDY DESIGN GROUP
Jahro, 9 Delaford Avenue, Worsley, Manchester, M28 2QS, England
e: connect.odg@outlook.com