1. Site - Landscaping - Existing

1 : 200

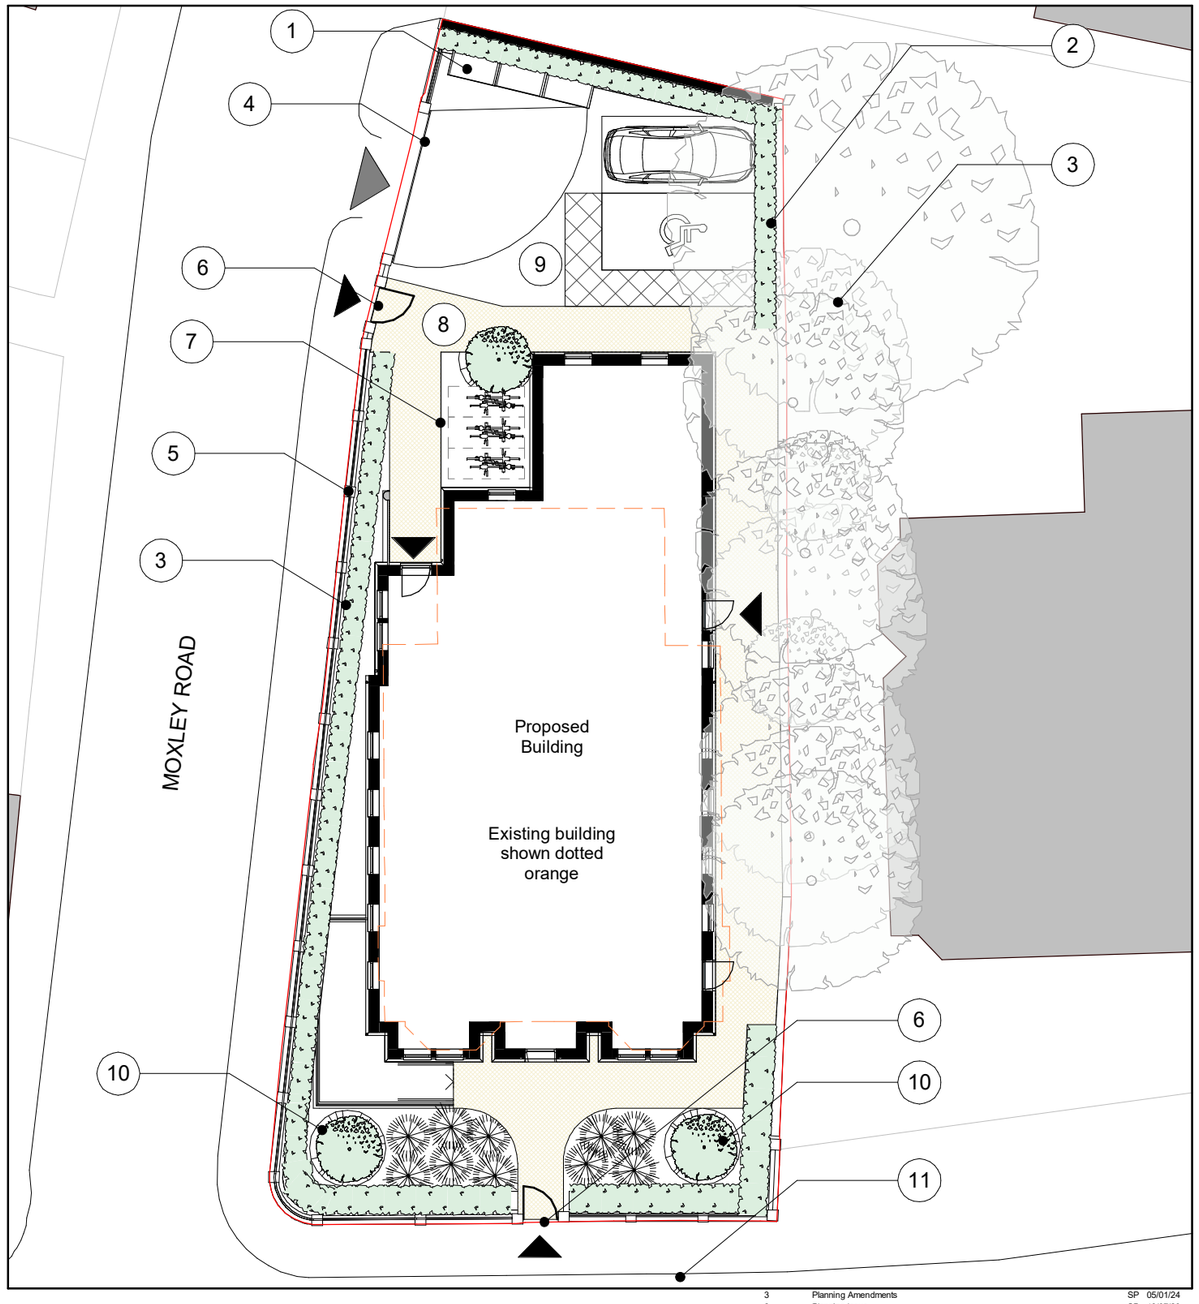

2. Site - Landscaping - Proposed

1 : 200

N

Note Block - Landscaping

1 Refuse store
2 2No. Parking spaces including 1No. Accessible space. Please refer to specialist report.
3 Proposed native hedging.
4 Vehicle site access gate in metal
5 Proposed perimeter stone walling with stone piers, stone coping and metal rail infill. Existing stone copings to be retained and reused where possible. Visusally permeable above 600mm.

Note Block - Landscaping

6 Pedestrian site access gate in metal. To open into site.
7 Cycle storage. 3No. Sheffield stands with shelter over. Please refer to transport statement.
8 Site paviours
9 Tarmacadam surface
10 Proposed small tree and low level shrubbery.
11 Existing dropped kerb to be reinstated.

REV	DESCRIPTION	BY	DATE
3	Planning Amendments	SP	05/01/24
2	Planning Issue	SP	19/07/23
1	Drawing tweaks	SP	04/07/23

PROJECT 27-29 Middleton Road	SCALE @ A3 1 : 200	DATE 15 APR 2022	DRAWN BY SP
CLIENT Kehillas Crampsall	STATUS PLANNING		
TITLE Landscaping Plans	PROJECT NO. DA21055.	DRAWING NO. 006.	REV. 3

DEBTAL ARCHITECTURE
www.debtal.co.uk

NOTES

© COPYRIGHT : ALL RIGHTS RESERVED.
THIS DRAWING MUST NOT BE REPRODUCED WITHOUT PRIOR WRITTEN CONSENT.
DRAWING TO BE USED FOR THE STATUS INDICATED ONLY.
ALL DIMENSIONS AND SETTING OUT SHALL BE CHECKED AND CONFIRMED ON SITE.
ANY DISCREPANCIES TO BE REPORTED TO THE DESIGNER PRIOR TO THE COMMENCEMENT OF ANY WORK. ALL WORK AND MATERIALS TO BE IN ACCORDANCE WITH CURRENT STATUTORY LEGISLATION, RELEVANT CODES OF PRACTICE AND BRITISH STANDARDS. ALL DIMENSIONS ON THIS DRAWING ARE IN MILLIMETRES (UNLESS OTHERWISE STATED).