KEY:

- Non-original fabric removed.
- Original fabric removed.
- Other alterations.
- XXX — Code refers to alterations and downtakings. Refer to 10422-SHP-Z2-A-B5D9-JC20-SC-XX-001 schedule for the warehouse alterations and 10422-SHP-Z3-A-B5D9-JC20-SC-XX-001 for the Deansgate Terraces alterations.
- Area within dashed line is an assumed layout. No survey information available.

NOTES:

For facade alterations refer to 10422-SHP-Z2-A-B5D9-JC20-XE drawing series for warehouse alterations and 10422-SHP-Z3-A-B5D9-JC20-XE drawing series for the Deansgate Terraces.


All original internal and external brickwork and stonework to be cleaned and made good.

All exposed fixing holes from removed non- original fixtures to be cut out and made good with repair mortar.

All original rainwater goods to be repaired.

All vegetation to be removed, affected joints to be raked out, cleaned and repointed with repair mortar.

KEY PLAN:

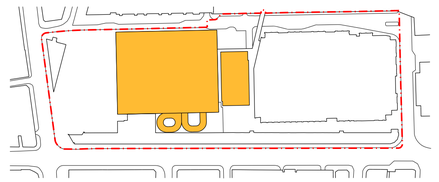



This drawing is copyright. Do not scale off dimensions. All dimensions to be checked on site by contractor. Contractor to report and dimensional discrepancies, errors or omissions prior to commencing on site.	Rev	Date	Comment
	P01	22-11-2022	Planning Submission

Project Title: Great Northern	Drawing Title: Warehouse Existing Alterations Elevation West	
	Job No: 10422	Scale: 1:125 @ A1
Status: PLANNING	Drawing No: 10422-SHP-Z2-A-B5D9-JC20-XE-EW-001	Revision: P01

simpsonhaugh
MANCHESTER +44 (0)161 832 2345
LONDON +44 (0)20 7549 4000

© SimpsonHaugh and Partners 2022